



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECSpeed®2017_fp_base = 83.1

SPECSpeed®2017_fp_peak = 83.1

CPU2017 License: 9017


Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

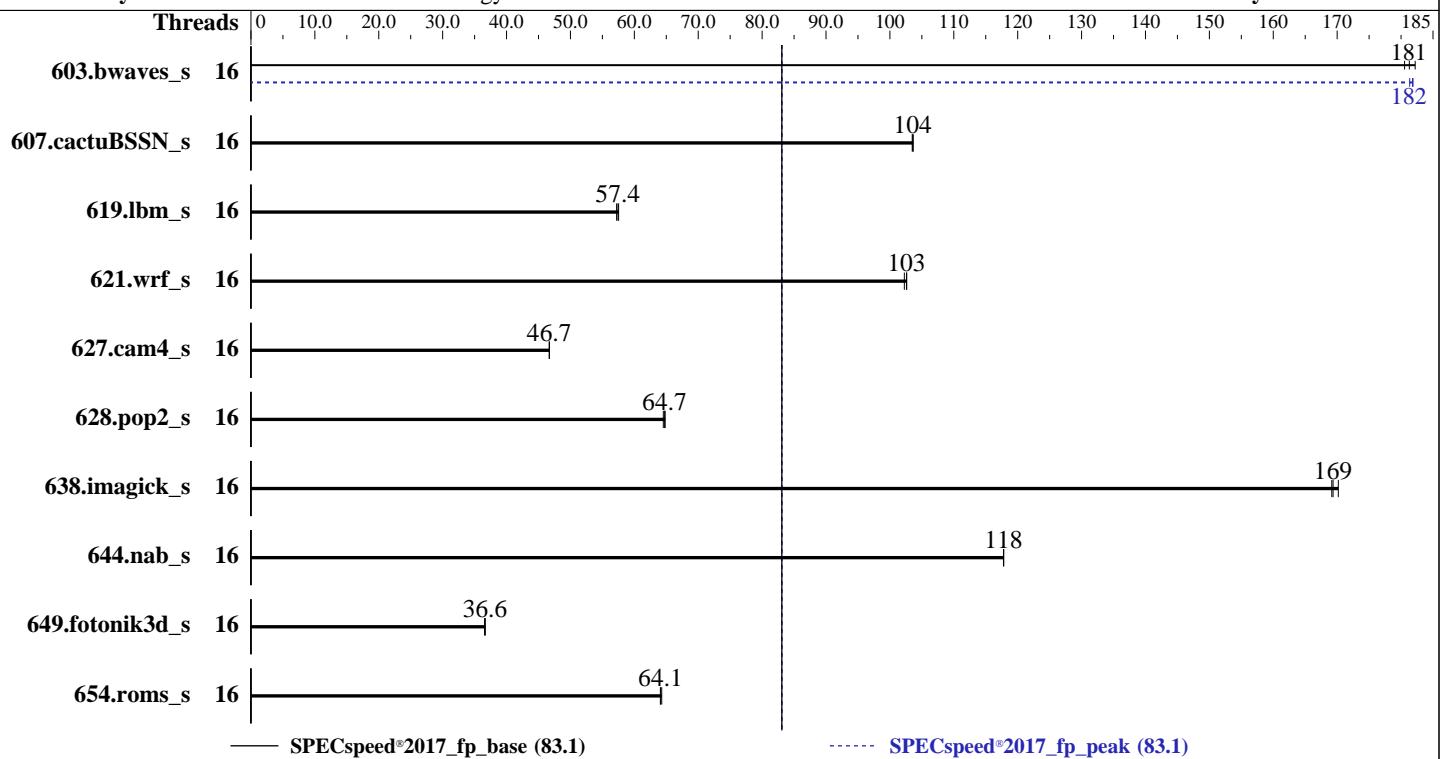

Hardware

CPU Name: Intel Xeon D-2775TE
Max MHz: 3100
Nominal: 2000
Enabled: 16 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 25 MB I+D on chip per chip
Other: None
Memory: 128 GB (4 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
Storage: 1 x 960 GB M.2 NVME SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
Compiler: Kernel 5.14.21-150400.22-default
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Lenovo BIOS Version IYE105O 2.10 released Oct-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to balance power and performance



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECSpeed®2017_fp_base = 83.1

SPECSpeed®2017_fp_peak = 83.1

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	
603.bwaves_s	16	324	182	<u>325</u>	<u>181</u>	327	181	16	<u>325</u>	<u>182</u>	325	181	324	182	
607.cactuBSSN_s	16	161	103	<u>161</u>	<u>104</u>	161	104	16	<u>161</u>	<u>103</u>	<u>161</u>	<u>104</u>	161	104	
619.lbm_s	16	91.5	57.2	91.0	57.5	<u>91.2</u>	<u>57.4</u>	16	91.5	57.2	91.0	57.5	<u>91.2</u>	<u>57.4</u>	
621.wrf_s	16	129	102	<u>129</u>	<u>103</u>	129	103	16	129	102	<u>129</u>	<u>103</u>	129	103	
627.cam4_s	16	190	46.7	190	46.7	<u>190</u>	<u>46.7</u>	16	190	46.7	190	46.7	<u>190</u>	<u>46.7</u>	
628.pop2_s	16	184	64.5	183	64.8	<u>183</u>	<u>64.7</u>	16	184	64.5	183	64.8	<u>183</u>	<u>64.7</u>	
638.imagick_s	16	84.8	170	85.3	169	<u>85.2</u>	<u>169</u>	16	84.8	170	85.3	169	<u>85.2</u>	<u>169</u>	
644.nab_s	16	148	118	148	118	<u>148</u>	<u>118</u>	16	148	118	148	118	<u>148</u>	<u>118</u>	
649.fotonik3d_s	16	<u>249</u>	<u>36.6</u>	249	36.6	249	36.7	16	<u>249</u>	<u>36.6</u>	249	36.6	<u>249</u>	36.7	
654.roms_s	16	245	64.3	246	64.1	<u>246</u>	<u>64.1</u>	16	245	64.3	246	64.1	<u>246</u>	<u>64.1</u>	
SPECSpeed®2017_fp_base =				<u>83.1</u>				SPECSpeed®2017_fp_peak =				<u>83.1</u>			

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.0-2/lib/intel64:/home/cpu2017-1.1.9-ic2023.0-2/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECspeed®2017_fp_base = 83.1

SPECspeed®2017_fp_peak = 83.1

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes

BIOS configuration:

Operating Mode set to Custom Mode

Hyper-Threading set to Disabled

CPU P-state Control set to Legacy

```
Sysinfo program /home/cpu2017-1.1.9-ic2023.0-2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Oct 13 02:02:11 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:02:11 up 1:02, 1 user, load average: 0.00, 0.08, 2.47
USER   TTY      FROM          LOGIN@    IDLE    JCPU   PCPU WHAT
root   ttys1     -           01:05    11.00s  1.22s  0.00s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority       (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 513547
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECspeed®2017_fp_base = 83.1

SPECspeed®2017_fp_peak = 83.1

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes       (-u) 513547
virtual memory           (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.0-lin-core-avx512-speed-20221201.cfg --define cores=16 --tune base,peak -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.0-lin-core-avx512-speed-20221201.cfg --define cores=16 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0-2
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) D-2775TE CPU @ 2.00GHz
vendor_id       : GenuineIntel
cpu family     : 6
model          : 108
stepping        : 1
microcode       : 0x1000230
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 16
siblings        : 16
1 physical ids (chips)
16 processors (hardware threads)
physical id 0: core ids 0-15
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
```

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                16
On-line CPU(s) list:   0-15
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) D-2775TE CPU @ 2.00GHz
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECspeed®2017_fp_base = 83.1

SPECspeed®2017_fp_peak = 83.1

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

CPU family:	6																																																			
Model:	108																																																			
Thread(s) per core:	1																																																			
Core(s) per socket:	16																																																			
Socket(s):	1																																																			
Stepping:	1																																																			
Frequency boost:	enabled																																																			
CPU max MHz:	2001.0000																																																			
CPU min MHz:	800.0000																																																			
BogoMIPS:	4000.00																																																			
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf fmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adix smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocndq la57 rdpid fsrm md_clear pconfig flush_lld arch_capabilities																																																			
Virtualization:	VT-x																																																			
L1d cache:	768 KiB (16 instances)																																																			
L1i cache:	512 KiB (16 instances)																																																			
L2 cache:	20 MiB (16 instances)																																																			
L3 cache:	25 MiB (1 instance)																																																			
NUMA node(s):	1																																																			
NUMA node0 CPU(s):	0-15																																																			
Vulnerability Itlb multihit:	Not affected																																																			
Vulnerability L1tf:	Not affected																																																			
Vulnerability Mds:	Not affected																																																			
Vulnerability Meltdown:	Not affected																																																			
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp																																																			
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization																																																			
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling																																																			
Vulnerability Srbds:	Not affected																																																			
Vulnerability Tsx async abort:	Not affected																																																			
From lscpu --cache:																																																				
<table border="1"> <thead> <tr><th>NAME</th><th>ONE-SIZE</th><th>ALL-SIZE</th><th>WAYS</th><th>TYPE</th><th>LEVEL</th><th>SETS</th><th>PHY-LINE</th><th>COHERENCY-SIZE</th></tr> </thead> <tbody> <tr><td>L1d</td><td>48K</td><td>768K</td><td>12</td><td>Data</td><td>1</td><td>64</td><td>1</td><td>64</td></tr> <tr><td>L1i</td><td>32K</td><td>512K</td><td>8</td><td>Instruction</td><td>1</td><td>64</td><td>1</td><td>64</td></tr> <tr><td>L2</td><td>1.3M</td><td>20M</td><td>20</td><td>Unified</td><td>2</td><td>1024</td><td>1</td><td>64</td></tr> <tr><td>L3</td><td>25M</td><td>25M</td><td>20</td><td>Unified</td><td>3</td><td>20480</td><td>1</td><td>64</td></tr> </tbody> </table>								NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE	L1d	48K	768K	12	Data	1	64	1	64	L1i	32K	512K	8	Instruction	1	64	1	64	L2	1.3M	20M	20	Unified	2	1024	1	64	L3	25M	25M	20	Unified	3	20480	1	64
NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE																																												
L1d	48K	768K	12	Data	1	64	1	64																																												
L1i	32K	512K	8	Instruction	1	64	1	64																																												
L2	1.3M	20M	20	Unified	2	1024	1	64																																												
L3	25M	25M	20	Unified	3	20480	1	64																																												

8. numactl --hardware																																																				
NOTE: a numactl 'node' might or might not correspond to a physical chip.																																																				
available: 1 nodes (0)																																																				
node 0 cpus: 0-15																																																				
node 0 size: 128410 MB																																																				
node 0 free: 123660 MB																																																				
node distances:																																																				
node 0																																																				
0: 10																																																				

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECSpeed®2017_fp_base = 83.1

SPECSpeed®2017_fp_peak = 83.1

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
-----  
9. /proc/meminfo  
MemTotal:      131492712 kB  
  
-----  
10. who -r  
run-level 3 Oct 13 00:59  
  
-----  
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target  Status  
multi-user      running  
  
-----  
12. Services, from systemctl list-unit-files  
STATE          UNIT FILES  
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi  
                issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections postfix  
                purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4  
                wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemdr-mount-fs  
disabled       autofs autostart-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
                firewalld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiuio  
                issue-add-ssh-keys kexec-load lummask man-db-create multipathd nfs nfs-blkmap nmb ntp-wait  
                ntpd nvmf-autoconnect rdisc rpcbind rpmconfigcheck rsyncd serial-getty@  
                smartd_generate_opts smb snmpd snmptrapd systemd-boot-check-no-failures  
                systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd  
generated      ntp_sync  
indirect       wickedd  
  
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=3b09241f-dfe9-4f77-a91b-5c9e94738f47  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
  
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 2.00 GHz.  
    The governor "performance" may decide which speed to use  
    within this range.  
    boost state support:  
    Supported: yes  
    Active: yes  
  
-----  
15. sysctl  
kernel.numa_balancing          0  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes       0  
vm.dirty_background_ratio       10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECSpeed®2017_fp_base = 83.1

SPECSpeed®2017_fp_peak = 83.1

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     60
vm.watermark_boost_factor        15000
vm.watermark_scale_factor         10
vm.zone_reclaim_mode              0

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag          always defer defer+madvise [madvise] never
    enabled         [always] madvise never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs    60000
    defrag                  1
    max_ptes_none            511
    max_ptes_shared           256
    max_ptes_swap              64
    pages_to_scan             4096
    scan_sleep_millisecs      10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP4

-----
19. Disk information
    SPEC is set to: /home/cpu2017-1.1.9-ic2023.0-2
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/nvme0n1p3  xfs   893G  32G  861G  4%  /

-----
20. /sys/devices/virtual/dmi/id
    Vendor:          Lenovo
    Product:         ThinkEdge SE360 V2 CPU Planar
    Product Family: ThinkSystem
    Serial:          1234567890

-----
21. dmidecode
    Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        4x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2933

-----
22. BIOS
    (This section combines info from /sys/devices and dmidecode.)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECSpeed®2017_fp_base = 83.1

SPECSpeed®2017_fp_peak = 83.1

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

BIOS Vendor: Lenovo
BIOS Version: IYE1050-2.10
BIOS Date: 10/04/2023
BIOS Revision: 2.10
Firmware Revision: 2.10

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 607.cactusBSSN_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECSpeed®2017_fp_base = 83.1

SPECSpeed®2017_fp_peak = 83.1

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubssn_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fsto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fsto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECSpeed®2017_fp_base = 83.1

SPECSpeed®2017_fp_peak = 83.1

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -fsto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SE360 V2
(2.00 GHz, Intel Xeon D-2775TE)

SPECSpeed®2017_fp_base = 83.1

SPECSpeed®2017_fp_peak = 83.1

CPU2017 License: 9017

Test Date: Oct-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Peak Optimization Flags (Continued)

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.xml

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-12 14:02:11-0400.

Report generated on 2023-11-07 18:43:29 by CPU2017 PDF formatter v6716.

Originally published on 2023-11-07.