SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECrate®2017_int_base = 263

SPECrate®2017_int_peak = 279

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

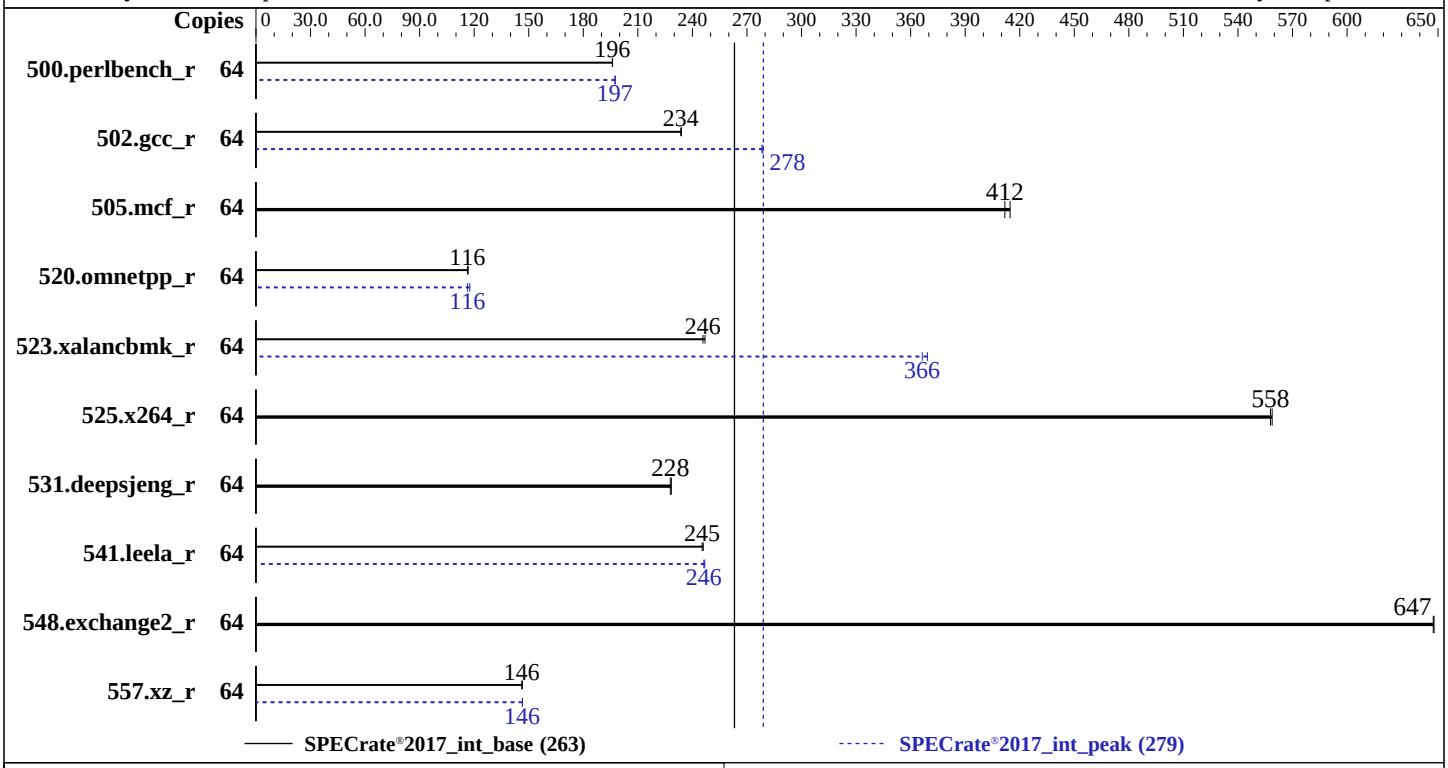

Hardware

CPU Name:	AMD EPYC 7303
Max MHz:	3400
Nominal:	2400
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	64 MB I+D on chip per chip, 16 MB shared / 4 cores
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
Storage:	1 x 240 GB SATA III SSD
Other:	None

Software

OS:	Ubuntu 22.04.3 LTS Kernel 5.15.0-86-generic
Compiler:	C/C++/Fortran: Version 3.2.0 of AOCC
Parallel:	No
Firmware:	Version 2.6 released Apr-2023
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

Mainstream A+ Server AS -2024S-TR
(H12DSi-N6 , AMD EPYC 7303)

SPECrate®2017_int_base = 263

SPECrate®2017_int_peak = 279

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Oct-2023
Hardware Availability: Sep-2023
Software Availability: Sep-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	520	196	**520**	**196**			64	**516**	**197**	516	198		
502.gcc_r	64	**388**	**234**	387	234			64	**326**	**278**	325	279		
505.mcf_r	64	**251**	**412**	249	415			64	**251**	**412**	249	415		
520.omnetpp_r	64	719	117	**722**	**116**			64	**722**	**116**	714	118		
523.xalancbmk_r	64	**275**	**246**	274	247			64	183	369	**184**	**366**		
525.x264_r	64	201	559	**201**	**558**			64	201	559	**201**	**558**		
531.deepsjeng_r	64	**322**	**228**	321	228			64	**322**	**228**	321	228		
541.leela_r	64	431	246	**432**	**245**			64	**430**	**246**	429	247		
548.exchange2_r	64	**259**	**647**	259	648			64	**259**	**647**	259	648		
557.xz_r	64	472	147	**473**	**146**			64	472	147	**472**	**146**		

SPECrate®2017_int_base = 263

SPECrate®2017_int_peak = 279

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
BIOS Settings:
Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 150
Package Power Limit Control = Manual
Package Power Limit = 150
APBDIS = 1
NUMA Nodes Per Socket = NPS4

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on as-2024s-tr-7303 Wed Oct 18 10:48:39 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
 12. Failed units, from systemctl list-units --state=failed
```

(Continued on next page)

Platform Notes (Continued)

```
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux as-2024s-tr-7303 5.15.0-86-generic #96-Ubuntu SMP Wed Sep 20 08:23:49 UTC 2023 x86_64 x86_64 x86_64
  GNU/Linux

------------------------------------------------------------
2. w
   10:48:39 up 16 min,  2 users,  load average: 0.14, 0.30, 0.23
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  lab      tty1     -                10:40    8:20   5.23s  0.01s -bash
  lab      pts/0    -                10:40    6.00s  2.82s  5.21s sudo su -

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       lab

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              4127179
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 sudo su -
 sudo su -
 su -
 -bash
 python3 ./run_amd_rate_aocc320_milanx_A1.py
 /bin/bash ./amd_rate_aocc320_milanx_A1.sh
 runcpu --config amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 intrate
 runcpu --configfile amd_rate_aocc320_milanx_A1.cfg --tune all --reportable --iterations 2 --nopower
   --runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
```

(Continued on next page)

Platform Notes (Continued)

```
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 7303 16-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 1
    stepping        : 1
    microcode       : 0xa0011d1
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 2560 4K pages
    cpu cores       : 16
    siblings        : 32
    2 physical ids (chips)
    64 processors (hardware threads)
    physical id 0: core ids 0-15
    physical id 1: core ids 0-15
    physical id 0: apicids 0-31
    physical id 1: apicids 32-63
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   48 bits physical, 48 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          64
  On-line CPU(s) list:             0-63
  Vendor ID:                       AuthenticAMD
  Model name:                      AMD EPYC 7303 16-Core Processor
  CPU family:                      25
  Model:                           1
  Thread(s) per core:              2
  Core(s) per socket:              16
  Socket(s):                       2
  Stepping:                        1
  Frequency boost:                 enabled
  CPU max MHz:                     3435.9370
  CPU min MHz:                     1500.0000
  BogoMIPS:                        4799.88
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                                   lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                                   rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe
                                   popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                                   cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                                   topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                                   cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                                   fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
                                   clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc
                                   cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
                                   rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale
                                   vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
                                   v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid
```

(Continued on next page)

Platform Notes (Continued)

```
                                    overflow_recov succor smca fsrm
  Virtualization:                   AMD-V
  L1d cache:                        1 MiB (32 instances)
  L1i cache:                        1 MiB (32 instances)
  L2 cache:                         16 MiB (32 instances)
  L3 cache:                         128 MiB (8 instances)
  NUMA node(s):                     8
  NUMA node0 CPU(s):                0-3,32-35
  NUMA node1 CPU(s):                4-7,36-39
  NUMA node2 CPU(s):                8-11,40-43
  NUMA node3 CPU(s):                12-15,44-47
  NUMA node4 CPU(s):                16-19,48-51
  NUMA node5 CPU(s):                20-23,52-55
  NUMA node6 CPU(s):                24-27,56-59
  NUMA node7 CPU(s):                28-31,60-63
  Vulnerability Gather data sampling: Not affected
  Vulnerability Itlb multihit:      Not affected
  Vulnerability L1tf:               Not affected
  Vulnerability Mds:                Not affected
  Vulnerability Meltdown:           Not affected
  Vulnerability Mmio stale data:    Not affected
  Vulnerability Retbleed:           Not affected
  Vulnerability Spec rstack overflow: Mitigation; safe RET
  Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:         Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                    filling, PBRSB-eIBRS Not affected
  Vulnerability Srbds:              Not affected
  Vulnerability Tsx async abort:    Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       1M    8 Data            1    64        1             64
     L1i       32K       1M    8 Instruction     1    64        1             64
     L2       512K      16M    8 Unified         2  1024        1             64
     L3        16M     128M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-3,32-35
  node 0 size: 128821 MB
  node 0 free: 128316 MB
  node 1 cpus: 4-7,36-39
  node 1 size: 129021 MB
  node 1 free: 128506 MB
  node 2 cpus: 8-11,40-43
  node 2 size: 129021 MB
  node 2 free: 128533 MB
  node 3 cpus: 12-15,44-47
  node 3 size: 129009 MB
  node 3 free: 128386 MB
  node 4 cpus: 16-19,48-51
  node 4 size: 129021 MB
  node 4 free: 128796 MB
  node 5 cpus: 20-23,52-55
  node 5 size: 128973 MB
  node 5 free: 128704 MB
  node 6 cpus: 24-27,56-59
```

(Continued on next page)

Platform Notes (Continued)

```
  node 6 size: 129021 MB
  node 6 free: 128791 MB
  node 7 cpus: 28-31,60-63
  node 7 size: 129017 MB
  node 7 free: 128753 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056673768 kB

------------------------------------------------------------
10. who -r
  run-level 5 Oct 18 10:34

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD   ACTIVE SUB    DESCRIPTION
  * systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
                   lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog
                   secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
                   systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
                   vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@
                   systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync upower
  generated        apport
  indirect         uuidd
  masked           cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                   x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.15.0-86-generic
  root=UUID=d06a341c-7b0d-4f57-aec5-11bd41a1c57a
  ro

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2400MHz

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         always [madvise] never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.3 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
```

(Continued on next page)

Platform Notes (Continued)

```
  /dev/sda2      ext4  218G   16G  191G   8% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Supermicro
    Product:        AS-2024S-TR
    Serial:         WMF21BS602916

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends Inc.
   BIOS Version:      2.6
   BIOS Date:         04/13/2023
   BIOS Revision:     5.22
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base,
        | peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++     | 523.xalancbmk_r(peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base,
        | peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

C++ benchmarks:
-m64 -std=c++98 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -fvirtual-function-elimination
-fvisibility=hidden -lamdlibm -ljemalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

557.xz_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

C++ benchmarks:

520.omnetpp_r: -m64 -std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc

523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc

531.deepsjeng_r: basepeak = yes

541.leela_r: Same as 520.omnetpp_r

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

Peak Other Flags

C benchmarks (except as noted below):
`-Wno-unused-command-line-argument`

502.gcc_r: `-L/usr/lib -Wno-unused-command-line-argument`
`-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32`

C++ benchmarks (except as noted below):
`-Wno-unused-command-line-argument`

523.xalancbmk_r: `-L/usr/lib -Wno-unused-command-line-argument`
`-L/sppo/bin/cpu2017v118-aocc3-milanX/amd_rate_aocc320_milanx_A_lib/lib32`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revH.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml`
`http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revH.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-18 06:48:39-0400.
Report generated on 2023-11-07 18:44:27 by CPU2017 PS formatter v6716.
Originally published on 2023-11-07.