SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R860 (Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 397

SPECspeed®2017_fp_peak = 399

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2023
Hardware Availability: May-2023
Software Availability: Aug-2023

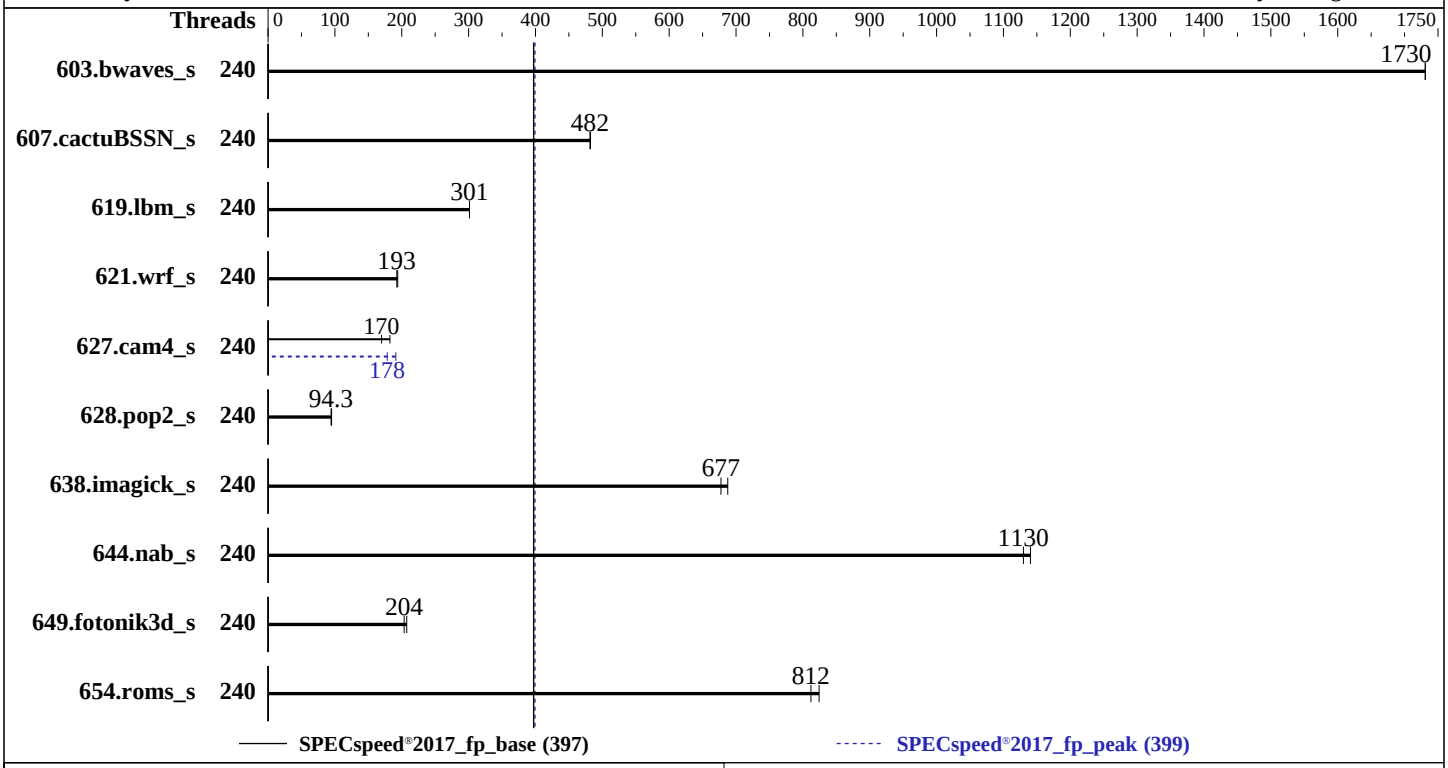

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	240 cores, 4 chips
Orderable:	2,4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	130 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.2 (Plow) 5.14.0-284.25.1.el9_2.x86_64
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 1.6.6 released Sep-2023
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	240	**34.1**	**1730**	34.1	1730			240	**34.1**	**1730**	34.1	1730		
607.cactuBSSN_s	240	**34.6**	**482**	34.6	482			240	**34.6**	**482**	34.6	482		
619.lbm_s	240	**17.4**	**301**	17.4	301			240	**17.4**	**301**	17.4	301		
621.wrf_s	240	68.2	194	**68.7**	**193**			240	68.2	194	**68.7**	**193**		
627.cam4_s	240	**52.2**	**170**	48.6	182			240	**49.7**	**178**	46.4	191		
628.pop2_s	240	125	95.0	**126**	**94.3**			240	125	95.0	**126**	**94.3**		
638.imagick_s	240	21.0	688	**21.3**	**677**			240	21.0	688	**21.3**	**677**		
644.nab_s	240	15.3	1140	**15.5**	**1130**			240	15.3	1140	**15.5**	**1130**		
649.fotonik3d_s	240	**44.8**	**204**	43.9	207			240	**44.8**	**204**	43.9	207		
654.roms_s	240	19.1	824	**19.4**	**812**			240	19.1	824	**19.4**	**812**		

SPECspeed®2017_fp_base = 397

SPECspeed®2017_fp_peak = 399

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2023.x/lib_2023.0/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.x/je5.0.1-64
     "
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 130 GB ramdisk created with the cmd: "mount -t tmpfs -o size=130G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
                  ADDDC Setting : Disabled
         DIMM Self Healing on
    Uncorrectable Memory Error : Disabled

             Logical Processor : Disabled
       DCU Streamer Prefetcher : Disabled
              Sub NUMA Cluster : 2-way Clustering
                Optimizer Mode : Enabled
 Opportunistic Snoop Broadcast : Disabled

                System Profile : Custom
          CPU Power Management : Maximum Performance
                           C1E : Disabled
                      C States : Autonomous
           Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
            PCI ASPM L1 Link
              Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.x/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Oct 11 14:46:38 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-14.el9_2.3)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-284.25.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Thu Jul 20 09:11:28 EDT
  2023 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
2. w
   14:46:38 up 5 days,  5:01,  1 user,  load average: 6.07, 6.00, 3.51
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1      Fri10    2:23m  1.82s  0.00s /bin/bash ./dell-run-speccpu.sh speed --define
  DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1 --output_format
  html,pdf,txt

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 8252616
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 8252616
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 login -- root
 -bash
 /bin/bash ./DELL_speed.sh
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
   --define DL-VERS=v4.8.1 --output_format html,pdf,txt
 /bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
   --define DL-VERS=v4.8.1 --output_format html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base,peak -o all --define
   drop_caches --define DL-4S=1 --define DL-BIOS-SNC=2 --define DL-LQC=1 --iterations 2 --define
   DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1 --output_format
   html,pdf,txt fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=240 --tune base,peak --output_format all
   --define drop_caches --define DL-4S=1 --define DL-BIOS-SNC=2 --define DL-LQC=1 --iterations 2 --define
   DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1 --output_format
   html,pdf,txt --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv
   --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.x

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
```

(Continued on next page)

Platform Notes (Continued)

```
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 143
     stepping        : 6
     microcode       : 0x2b0004d0
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
     cpu cores       : 60
     siblings        : 60
     4 physical ids (chips)
     240 processors (hardware threads)
     physical id 0: core ids 0-59
     physical id 1: core ids 0-59
     physical id 2: core ids 0-59
     physical id 3: core ids 0-59
     physical id 0: apicids
     0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
     ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
     physical id 1: apicids
     128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
     80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
     2,234,236,238,240,242,244,246
     physical id 2: apicids
     256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
     08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
     0,362,364,366,368,370,372,374
     physical id 3: apicids
     384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
     36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
     8,490,492,494,496,498,500,502
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          240
   On-line CPU(s) list:             0-239
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel
   Model name:                      Intel(R) Xeon(R) Platinum 8490H
   BIOS Model name:                 Intel(R) Xeon(R) Platinum 8490H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              1
   Core(s) per socket:              60
   Socket(s):                       4
   Stepping:                        6
   CPU max MHz:                     3500.0000
   CPU min MHz:                     800.0000
   BogoMIPS:                        3800.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
```

(Continued on next page)

Platform Notes (Continued)

```
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                        arch_capabilities
  Virtualization:       VT-x
  L1d cache:            11.3 MiB (240 instances)
  L1i cache:            7.5 MiB (240 instances)
  L2 cache:             480 MiB (240 instances)
  L3 cache:             450 MiB (4 instances)
  NUMA node(s):         8
  NUMA node0 CPU(s):    0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136,144,152,160,168,1
                        76,184,192,200,208,216,224,232
  NUMA node1 CPU(s):    4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,164,172
                        ,180,188,196,204,212,220,228,236
  NUMA node2 CPU(s):    1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,169,1
                        77,185,193,201,209,217,225,233
  NUMA node3 CPU(s):    5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173
                        ,181,189,197,205,213,221,229,237
  NUMA node4 CPU(s):    2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162,170,
                        178,186,194,202,210,218,226,234
  NUMA node5 CPU(s):    6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,166,174
                        ,182,190,198,206,214,222,230,238
  NUMA node6 CPU(s):    3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171,
                        179,187,195,203,211,219,227,235
  NUMA node7 CPU(s):    7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175
                        ,183,191,199,207,215,223,231,239
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                   sequence
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       48K    11.3M   12 Data            1     64        1             64
      L1i       32K     7.5M    8 Instruction     1     64        1             64
      L2         2M     480M   16 Unified         2   2048        1             64
      L3     112.5M     450M   15 Unified         3 122880        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus:
```

(Continued on next page)

Platform Notes (Continued)

```
  0,8,16,24,32,40,48,56,64,72,80,88,96,104,112,120,128,136,144,152,160,168,176,184,192,200,208,216,224,232
  node 0 size: 256981 MB
  node 0 free: 253967 MB
  node 1 cpus:
  4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,164,172,180,188,196,204,212,220,228,236
  node 1 size: 258041 MB
  node 1 free: 254919 MB
  node 2 cpus:
  1,9,17,25,33,41,49,57,65,73,81,89,97,105,113,121,129,137,145,153,161,169,177,185,193,201,209,217,225,233
  node 2 size: 258041 MB
  node 2 free: 251888 MB
  node 3 cpus:
  5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173,181,189,197,205,213,221,229,237
  node 3 size: 258041 MB
  node 3 free: 251643 MB
  node 4 cpus:
  2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162,170,178,186,194,202,210,218,226,234
  node 4 size: 258041 MB
  node 4 free: 251805 MB
  node 5 cpus:
  6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,166,174,182,190,198,206,214,222,230,238
  node 5 size: 258041 MB
  node 5 free: 256890 MB
  node 6 cpus:
  3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171,179,187,195,203,211,219,227,235
  node 6 size: 258001 MB
  node 6 free: 253157 MB
  node 7 cpus:
  7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175,183,191,199,207,215,223,231,239
  node 7 size: 258027 MB
  node 7 free: 257363 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  21  21  21  21  21  21
    1:  12  10  21  21  21  21  21  21
    2:  21  21  10  12  21  21  21  21
    3:  21  21  12  10  21  21  21  21
    4:  21  21  21  21  10  12  21  21
    5:  21  21  21  21  12  10  21  21
    6:  21  21  21  21  21  21  10  12
    7:  21  21  21  21  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2112734248 kB

------------------------------------------------------------
10. who -r
  run-level 3 Oct 6 09:45

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-14.el9_2.3)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
```

(Continued on next page)

Platform Notes (Continued)

```
                  gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
                  low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                  nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
                  rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
                  systemd-network-generator udisks2 upower vgauthd vmtoolsd
  enabled-runtime systemd-remount-fs
  disabled        arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                  canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
                  dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprdump iprinit iprupdate iscsid
                  iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvmf-autoconnect
                  ostree-readonly-sysroot-migration podman podman-auto-update podman-clean-transient
                  podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts
                  rpmdb-rebuild selinux-check-proper-disable serial-getty@ speech-dispatcherd sshd-keygen@
                  systemd-boot-check-no-failures systemd-boot-update systemd-pstore systemd-sysext
                  wpa_supplicant
  indirect        spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                  systemd-sysupdate systemd-sysupdate-reboot

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.25.1.el9_2.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.50 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.zone_reclaim_mode              0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.2 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
  system-release Red Hat Enterprise Linux release 9.2 (Plow)

------------------------------------------------------------
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.x
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  130G  5.4G  125G   5% /mnt/ramdisk

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R860
    Product Family: PowerEdge
    Serial:         SLR8603

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    30x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
    1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
    1x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.6.6
   BIOS Date:         09/20/2023
   BIOS Revision:     1.6
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512

(Continued on next page)

Peak Optimization Flags (Continued)

627.cam4_s (continued):
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.2023-10-11.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-11 15:46:37-0400.
Report generated on 2023-11-21 20:33:10 by CPU2017 PS formatter v6716.
Originally published on 2023-11-21.