SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Oct-2023
Hardware Availability: Nov-2023
Software Availability: Sep-2023

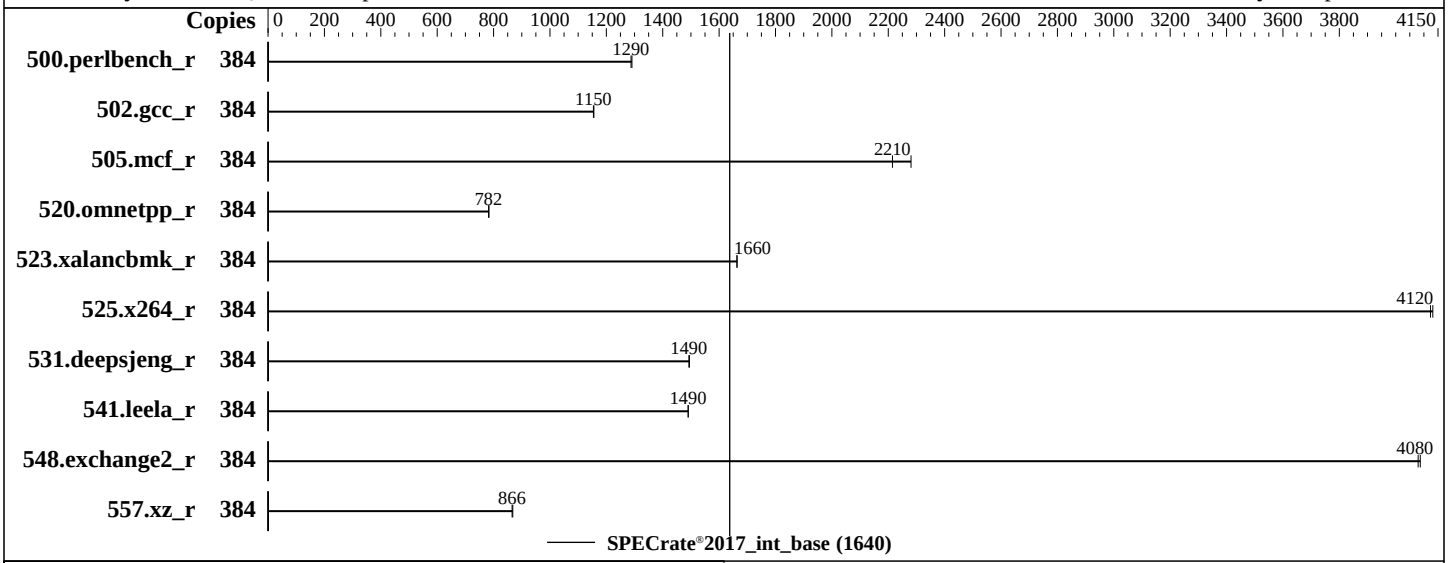

Hardware

CPU Name:	AMD EPYC 9654
Max MHz:	3700
Nominal:	2400
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 3.84 TB NVMe SSD
Other:	None

Software

OS:	Ubuntu 22.04.2 LTS kernel version 5.15.0-84-generic
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	Version 3A02 released Sep-2023
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U
(2.40 GHz,AMD EPYC 9654)

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9050
Test Sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test Date: Oct-2023
Hardware Availability: Nov-2023
Software Availability: Sep-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	474	1290	**475**	**1290**									
502.gcc_r	384	**471**	**1150**	470	1160									
505.mcf_r	384	272	2280	**280**	**2210**									
520.omnetpp_r	384	643	784	**644**	**782**									
523.xalancbmk_r	384	**244**	**1660**	244	1660									
525.x264_r	384	**163**	**4120**	163	4130									
531.deepsjeng_r	384	**295**	**1490**	294	1490									
541.leela_r	384	**427**	**1490**	427	1490									
548.exchange2_r	384	246	4090	**247**	**4080**									
557.xz_r	384	**479**	**866**	478	868									

SPECrate®2017_int_base = 1640

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/root/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/root/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS Configuration
 ACPI CST C2 Latency set to 18
 NUMA nodes per socket set to NPS4
 Determinism Control is Manual
 Determinism Slider set to Power
 cTDP Control set to Manual
 cTDP set to 400
 PPT Control set to Manual
 PPT set to 400
 ACPI SRAT L3 Cache As NUMA Domain set to Enable

 Sysinfo program /root/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on quanta Tue Oct 10 13:06:20 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
```

(Continued on next page)

Platform Notes (Continued)

```
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux quanta 5.15.0-84-generic #93-Ubuntu SMP Tue Sep 5 17:16:10 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   13:06:20 up 1 min,  1 user,  load average: 0.42, 0.27, 0.10
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                13:05    1:40   1.38s  0.07s /bin/bash ./amd_rate_aocc400_znver4_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              6190285
  nofiles              1024000
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -f
 -bash
 /bin/bash ./test.sh
 python3 ./run_amd_rate_aocc400_znver4_A1.py
 /bin/bash ./amd_rate_aocc400_znver4_A1.sh
 runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 2 intrate
 runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 2 --nopower
   --runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9654 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa10113e
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
```

(Continued on next page)

Platform Notes (Continued)

```
     TLB size        : 3584 4K pages
     cpu cores       : 96
     siblings        : 192
     2 physical ids (chips)
     384 processors (hardware threads)
     physical id 0: core ids 0-95
     physical id 1: core ids 0-95
     physical id 0: apicids 0-191
     physical id 1: apicids 256-447
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        46 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               384
   On-line CPU(s) list:                  0-383
   Vendor ID:                            AuthenticAMD
   Model name:                           AMD EPYC 9654 96-Core Processor
   CPU family:                           25
   Model:                                17
   Thread(s) per core:                   2
   Core(s) per socket:                   96
   Socket(s):                            2
   Stepping:                             1
   Frequency boost:                      enabled
   CPU max MHz:                          3707.8120
   CPU min MHz:                          1500.0000
   BogoMIPS:                             4792.85
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                         clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                                         lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                                         rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                                         movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                                         cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                                         topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                                         cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                                         fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                         rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                                         avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                         cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                                         wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                                         vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                                         v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                                         gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                                         rdpid overflow_recov succor smca fsrm flush_l1d sme sev sev_es
   Virtualization:                       AMD-V
   L1d cache:                            6 MiB (192 instances)
   L1i cache:                            6 MiB (192 instances)
   L2 cache:                             192 MiB (192 instances)
   L3 cache:                             768 MiB (24 instances)
   NUMA node(s):                         24
   NUMA node0 CPU(s):                    0-7,192-199
   NUMA node1 CPU(s):                    8-15,200-207
   NUMA node2 CPU(s):                    16-23,208-215
```

(Continued on next page)

Platform Notes (Continued)

```
   NUMA node3 CPU(s):                   24-31,216-223
   NUMA node4 CPU(s):                   32-39,224-231
   NUMA node5 CPU(s):                   40-47,232-239
   NUMA node6 CPU(s):                   48-55,240-247
   NUMA node7 CPU(s):                   56-63,248-255
   NUMA node8 CPU(s):                   64-71,256-263
   NUMA node9 CPU(s):                   72-79,264-271
   NUMA node10 CPU(s):                  80-87,272-279
   NUMA node11 CPU(s):                  88-95,280-287
   NUMA node12 CPU(s):                  96-103,288-295
   NUMA node13 CPU(s):                  104-111,296-303
   NUMA node14 CPU(s):                  112-119,304-311
   NUMA node15 CPU(s):                  120-127,312-319
   NUMA node16 CPU(s):                  128-135,320-327
   NUMA node17 CPU(s):                  136-143,328-335
   NUMA node18 CPU(s):                  144-151,336-343
   NUMA node19 CPU(s):                  152-159,344-351
   NUMA node20 CPU(s):                  160-167,352-359
   NUMA node21 CPU(s):                  168-175,360-367
   NUMA node22 CPU(s):                  176-183,368-375
   NUMA node23 CPU(s):                  184-191,376-383
   Vulnerability Gather data sampling: Not affected
   Vulnerability Itlb multihit:        Not affected
   Vulnerability L1tf:                 Not affected
   Vulnerability Mds:                  Not affected
   Vulnerability Meltdown:             Not affected
   Vulnerability Mmio stale data:      Not affected
   Vulnerability Retbleed:             Not affected
   Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl and seccomp
   Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:           Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                       filling, PBRSB-eIBRS Not affected
   Vulnerability Srbds:                Not affected
   Vulnerability Tsx async abort:      Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K       6M    8 Data            1    64        1             64
      L1i       32K       6M    8 Instruction     1    64        1             64
      L2         1M     192M    8 Unified         2  2048        1             64
      L3        32M     768M   16 Unified         3 32768        1             64

 ------------------------------------------------------------
 8. numactl --hardware
 NOTE: a numactl 'node' might or might not correspond to a physical chip.
   available: 24 nodes (0-23)
   node 0 cpus: 0-7,192-199
   node 0 size: 64108 MB
   node 0 free: 63454 MB
   node 1 cpus: 8-15,200-207
   node 1 size: 64507 MB
   node 1 free: 64004 MB
   node 2 cpus: 16-23,208-215
   node 2 size: 64507 MB
   node 2 free: 63881 MB
   node 3 cpus: 24-31,216-223
   node 3 size: 64460 MB
   node 3 free: 64106 MB
   node 4 cpus: 32-39,224-231
   node 4 size: 64507 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 4 free: 64150 MB
node 5 cpus: 40-47,232-239
node 5 size: 64507 MB
node 5 free: 64178 MB
node 6 cpus: 48-55,240-247
node 6 size: 64507 MB
node 6 free: 64198 MB
node 7 cpus: 56-63,248-255
node 7 size: 64507 MB
node 7 free: 64190 MB
node 8 cpus: 64-71,256-263
node 8 size: 64507 MB
node 8 free: 64152 MB
node 9 cpus: 72-79,264-271
node 9 size: 64507 MB
node 9 free: 64120 MB
node 10 cpus: 80-87,272-279
node 10 size: 64507 MB
node 10 free: 63881 MB
node 11 cpus: 88-95,280-287
node 11 size: 64507 MB
node 11 free: 64182 MB
node 12 cpus: 96-103,288-295
node 12 size: 64507 MB
node 12 free: 64270 MB
node 13 cpus: 104-111,296-303
node 13 size: 64507 MB
node 13 free: 64263 MB
node 14 cpus: 112-119,304-311
node 14 size: 64507 MB
node 14 free: 64271 MB
node 15 cpus: 120-127,312-319
node 15 size: 64507 MB
node 15 free: 64266 MB
node 16 cpus: 128-135,320-327
node 16 size: 64507 MB
node 16 free: 64251 MB
node 17 cpus: 136-143,328-335
node 17 size: 64507 MB
node 17 free: 64270 MB
node 18 cpus: 144-151,336-343
node 18 size: 64507 MB
node 18 free: 64253 MB
node 19 cpus: 152-159,344-351
node 19 size: 64507 MB
node 19 free: 64260 MB
node 20 cpus: 160-167,352-359
node 20 size: 64507 MB
node 20 free: 64272 MB
node 21 cpus: 168-175,360-367
node 21 size: 64507 MB
node 21 free: 64248 MB
node 22 cpus: 176-183,368-375
node 22 size: 64507 MB
node 22 free: 64263 MB
node 23 cpus: 184-191,376-383
node 23 size: 64447 MB
node 23 free: 64172 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23
```

(Continued on next page)

Platform Notes (Continued)

```
     0:  10  11  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     1:  11  10  11  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     2:  11  11  10  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     3:  12  12  12  10  11  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     4:  12  12  12  11  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     5:  12  12  12  11  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     6:  12  12  12  12  12  12  10  11  11  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     7:  12  12  12  12  12  12  11  10  11  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     8:  12  12  12  12  12  12  11  11  10  12  12  12  32  32  32  32  32  32  32  32  32  32  32  32
     9:  12  12  12  12  12  12  12  12  12  10  11  11  32  32  32  32  32  32  32  32  32  32  32  32
    10:  12  12  12  12  12  12  12  12  12  11  10  11  32  32  32  32  32  32  32  32  32  32  32  32
    11:  12  12  12  12  12  12  12  12  12  11  11  10  32  32  32  32  32  32  32  32  32  32  32  32
    12:  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  12  12  12  12  12  12  12  12  12
    13:  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  12  12  12  12  12  12  12  12  12
    14:  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  12  12  12  12  12  12  12  12  12
    15:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  10  11  11  12  12  12  12  12  12
    16:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  10  11  12  12  12  12  12  12
    17:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  11  11  10  12  12  12  12  12  12
    18:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11  11  12  12  12
    19:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10  11  12  12  12
    20:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  11  10  12  12  12
    21:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12  10  11  11
    22:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12  11  10  11
    23:  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584829000 kB

------------------------------------------------------------
10. who -r
  run-level 5 Oct 10 13:04

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT             LOAD   ACTIVE SUB    DESCRIPTION
  * rc-local.service loaded failed failed /etc/rc.local Compatibility

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor blk-availability chrony cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common irqbalance keyboard-setup lm-sensors lvm2-monitor lxd-agent multipathd
                   networkd-dispatcher open-iscsi open-vm-tools pollinate rpcbind rsyslog secureboot-db
                   setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
                   thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
  enabled-runtime  netplan-ovs-cleanup rc-local systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell grub-initrd-fallback ipmievd iscsid nftables rsync serial-getty@
                   sysstat systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync upower
  generated        apport cpufrequtils edac loadcpufreq openipmi
  indirect         uuidd
  masked           cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot nfs-common rc rcS
                   screen-cleanup sudo systemd-timesyncd x11-common
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.15.0-84-generic
  root=UUID=2aa35e7a-56f6-460a-ae69-64654070d9c7
  ro
  pcie_aspm=off

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2400MHz

------------------------------------------------------------
16. tuned-adm active
  Current active profile: latency-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio           3
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
```

(Continued on next page)

Platform Notes (Continued)

```
  max_ptes_swap             64
  pages_to_scan           4096
  scan_sleep_millisecs   10000

------------------------------------------------------------
20. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.2 LTS

------------------------------------------------------------
21. Disk information
SPEC is set to: /root/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 ext4  3.5T   32G  3.3T   1% /

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         Quanta Cloud Technology Inc.
    Product:        QuantaGrid D44N-1U
    Product Family: S6N

------------------------------------------------------------
23. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    24x Micron Technology MTC36F2046S1PC48BA1 64 GB 2 rank 4800


------------------------------------------------------------
24. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      3A02
   BIOS Date:         09/21/2023
   BIOS Revision:     5.27
   Firmware Revision: 3.24
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
Fortran | 548.exchange2_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext

Fortran benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.html
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1.1_AMD_Genoa.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.xml
http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1.1_AMD_Genoa.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-10-10 09:06:20-0400.
Report generated on 2023-11-21 20:34:07 by CPU2017 PS formatter v6716.
Originally published on 2023-11-21.