



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

**SPECrate®2017\_int\_base = 796**

**SPECrate®2017\_int\_peak = 808**

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

**Test Date:** Nov-2023

**Hardware Availability:** Oct-2023

**Software Availability:** Oct-2023

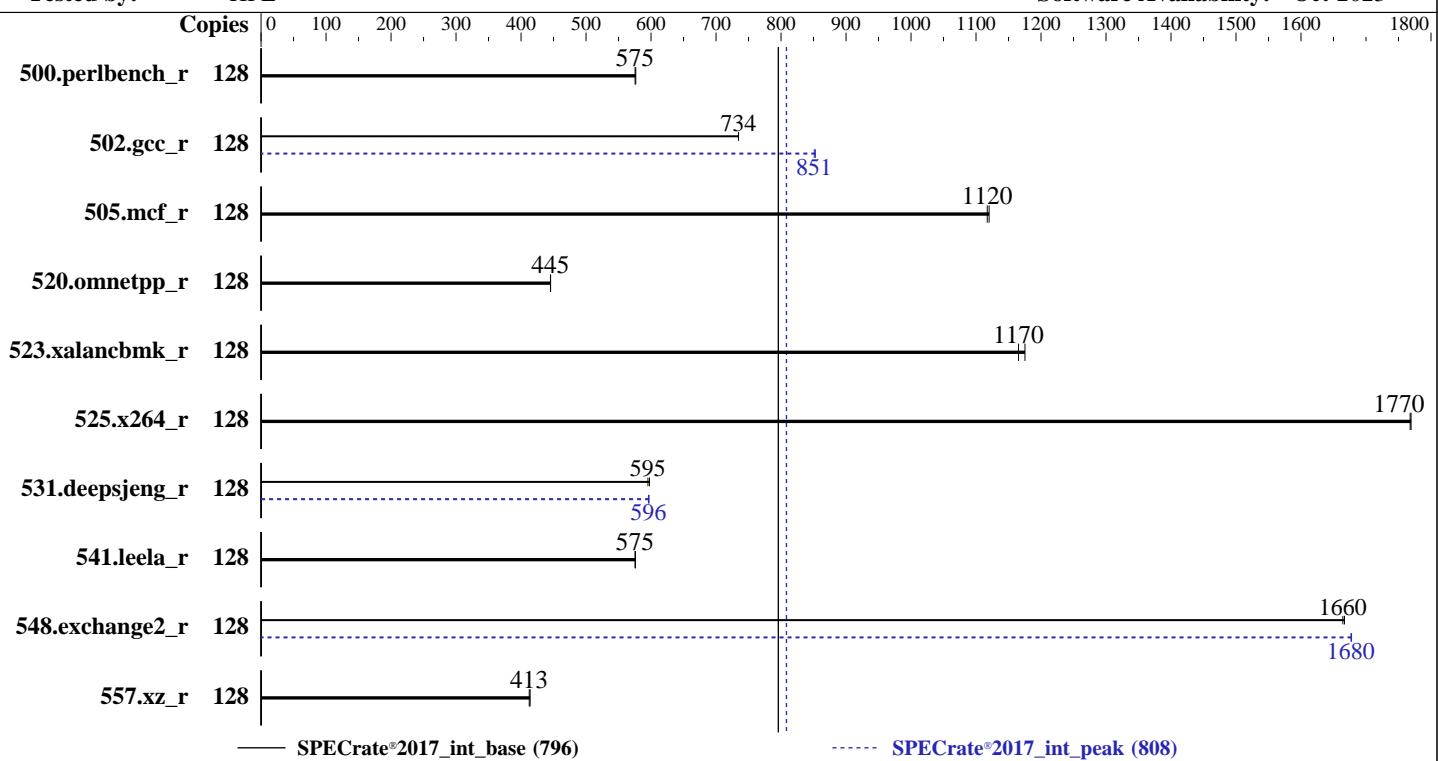

## Hardware

CPU Name: AMD EPYC 9384X  
 Max MHz: 3900  
 Nominal: 3100  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 768 MB I+D on chip per chip,  
 96 MB shared / 4 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

## Software

OS: Ubuntu 22.04 LTS  
 Compiler: Kernel 5.15.0-88-generic  
 Parallel: C/C++/Fortran: Version 4.0.0 of AOCC  
 Firmware: No  
 File System: HPE BIOS Version v1.50 10/04/2023 released  
 Oct-2023  
 System State: ext4  
 Base Pointers: Run level 5 (multi-user)  
 Peak Pointers: 64-bit  
 Other: 32/64-bit  
 Power Management: None  
 BIOS and OS set to prefer performance at  
 the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

**SPECrate®2017\_int\_base = 796**

**SPECrate®2017\_int\_peak = 808**

CPU2017 License: 3

**Test Date:** Nov-2023

**Test Sponsor:** HPE

**Hardware Availability:** Oct-2023

**Tested by:** HPE

**Software Availability:** Oct-2023

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	353	577	<b>354</b>	<b>575</b>			128	353	577	<b>354</b>	<b>575</b>				
502.gcc_r	128	247	735	<b>247</b>	<b>734</b>			128	213	853	<b>213</b>	<b>851</b>				
505.mcf_r	128	185	1120	<b>185</b>	<b>1120</b>			128	185	1120	<b>185</b>	<b>1120</b>				
520.omnetpp_r	128	<b>377</b>	<b>445</b>	377	445			128	<b>377</b>	<b>445</b>	377	445				
523.xalancbmk_r	128	115	1180	<b>116</b>	<b>1170</b>			128	115	1180	<b>116</b>	<b>1170</b>				
525.x264_r	128	127	1770	<b>127</b>	<b>1770</b>			128	127	1770	<b>127</b>	<b>1770</b>				
531.deepsjeng_r	128	245	598	<b>246</b>	<b>595</b>			128	<b>246</b>	<b>596</b>	246	597				
541.leela_r	128	<b>368</b>	<b>575</b>	368	576			128	<b>368</b>	<b>575</b>	368	576				
548.exchange2_r	128	201	1670	<b>201</b>	<b>1660</b>			128	<b>200</b>	<b>1680</b>	200	1680				
557.xz_r	128	334	414	<b>335</b>	<b>413</b>			128	334	414	<b>335</b>	<b>413</b>				

**SPECrate®2017\_int\_base = 796**

**SPECrate®2017\_int\_peak = 808**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
 'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
 To enable THP for all allocations for peak runs,  
 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib:/home/cpu2017/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

### BIOS Configuration

Workload Profile set to General Throughput Compute  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
Memory Patrol Scrubbing set to Disabled  
Last-Level Cache (LLC) as NUMA Node set to Enabled  
NUMA memory domains per socket set to Four memory domains per socket  
ACPI CST C2 Latency set to 18 microseconds  
Thermal Configuration set to Maximum Cooling  
Workload Profile set to Custom

Power Regulator set to OS Control Mode

The system ROM used for this result contains microcode version 0xa10123e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version Genoa-XPI 1.0.0.9

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on admin1 Fri Nov 17 13:15:56 2023
```

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 
1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)
  12. Failed units, from systemctl list-units --state=failed
  13. Services, from systemctl list-unit-files
  14. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Platform Notes (Continued)

```
15. cpupower frequency-info  
16. tuned-adm active  
17. sysctl  
18. /sys/kernel/mm/transparent_hugepage  
19. /sys/kernel/mm/transparent_hugepage/khugepaged  
20. OS release  
21. Disk information  
22. /sys/devices/virtual/dmi/id  
23. dmidecode  
24. BIOS
```

---

```
-----  
1. uname -a  
Linux admin1 5.15.0-88-generic #98-Ubuntu SMP Mon Oct 2 15:18:56 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
```

---

```
-----  
2. w  
13:15:56 up 11:38, 3 users, load average: 0.14, 0.04, 0.01  
USER      TTY      FROM             LOGIN@     IDLE    JCPU    PCPU WHAT  
admin1    pts/1      -          02Mar23 260days  0.04s  0.00s -bash  
admin1    pts/0      172.17.1.13  02Mar23 260days  0.15s  0.01s sshd: admin1 [priv]  
admin1    pts/1      172.17.1.13  02Mar23 20.00s  1.40s  0.14s sudo -i
```

---

```
-----  
3. Username  
From environment variable $USER: root  
From the command 'logname': admin1
```

---

```
-----  
4. ulimit -a  
time(seconds)      unlimited  
file(blocks)       unlimited  
data(kbytes)       unlimited  
stack(kbytes)      unlimited  
coredump(blocks)   0  
memory(kbytes)     unlimited  
locked memory(kbytes) 2097152  
process            3094357  
nofiles            1024  
vmemory(kbytes)    unlimited  
locks               unlimited  
rtprio              0
```

---

```
-----  
5. sysinfo process ancestry  
/sbin/init  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: admin1 [priv]  
sshd: admin1@pts/0  
-bash  
sudo -i  
sudo -i  
-bash  
python3 ./run_inrate_aocc400_znver4_A1_2.py  
/bin/bash ./amd_rate_aocc400_znver4_A1.sh  
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 inrate  
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --nopower  
--runmode rate --tune base:peak --size test:train:refrate inrate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.016/templogs/preenv.inrate.016.0.log --lognum 016.0 --from_runcpu 2
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo  
    model name      : AMD EPYC 9384X 32-Core Processor  
    vendor_id       : AuthenticAMD  
    cpu family     : 25  
    model          : 17  
    stepping        : 2  
    microcode       : 0xa10123e  
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso  
    TLB size        : 3584 4K pages  
    cpu cores       : 32  
    siblings         : 64  
    2 physical ids (chips)  
    128 processors (hardware threads)  
    physical id 0: core ids 0-31  
    physical id 1: core ids 0-31  
    physical id 0: apicids 0-63  
    physical id 1: apicids 64-127
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

From lscpu from util-linux 2.37.2:

```
Architecture:                                x86_64  
CPU op-mode(s):                            32-bit, 64-bit  
Address sizes:                             52 bits physical, 57 bits virtual  
Byte Order:                                Little Endian  
CPU(s):                                     128  
On-line CPU(s) list:                      0-127  
Vendor ID:                                 AuthenticAMD  
Model name:                               AMD EPYC 9384X 32-Core Processor  
CPU family:                                25  
Model:                                      17  
Thread(s) per core:                        2  
Core(s) per socket:                        32  
Socket(s):                                 2  
Stepping:                                    2  
Frequency boost:                           enabled  
CPU max MHz:                              3911.3279  
CPU min MHz:                              1500.0000  
BogoMIPS:                                   6191.18  
Flags:                                     fpu vme de pse tsc msr pae cx8 apic sep mtrr pge mca cmov pat pse36  
                                         clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp  
                                         lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf  
                                         rapl pn1 pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe  
                                         popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic  
                                         cr8_legacy abm sse4a misalignsse 3dnopprefetch osvw ibs skinit wdt tce  
                                         topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13  
                                         cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall  
                                         fsgsbase bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq  
                                         rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw  
                                         avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc  
                                         cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru  
                                         wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale  
                                         vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

**SPECrate®2017\_int\_base = 796**

**SPECrate®2017\_int\_peak = 808**

CPU2017 License: 3

**Test Date:** Nov-2023

Test Sponsor: HPE

**Hardware Availability:** Oct-2023

Tested by: HPE

**Software Availability:** Oct-2023

## Platform Notes (Continued)

```
v_vmsave_vmlload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_lid
AMD-V
```

Virtualization:

L1d cache:	2 MiB (64 instances)
L1i cache:	2 MiB (64 instances)
L2 cache:	64 MiB (64 instances)
L3 cache:	1.5 GiB (16 instances)

NUMA node(s):

NUMA node0 CPU(s):	0-3,64-67
NUMA node1 CPU(s):	4-7,68-71
NUMA node2 CPU(s):	8-11,72-75
NUMA node3 CPU(s):	12-15,76-79
NUMA node4 CPU(s):	16-19,80-83
NUMA node5 CPU(s):	20-23,84-87
NUMA node6 CPU(s):	24-27,88-91
NUMA node7 CPU(s):	28-31,92-95
NUMA node8 CPU(s):	32-35,96-99
NUMA node9 CPU(s):	36-39,100-103
NUMA node10 CPU(s):	40-43,104-107
NUMA node11 CPU(s):	44-47,108-111
NUMA node12 CPU(s):	48-51,112-115
NUMA node13 CPU(s):	52-55,116-119
NUMA node14 CPU(s):	56-59,120-123
NUMA node15 CPU(s):	60-63,124-127

Vulnerability Gather data sampling: Not affected

Vulnerability Itlb multihit: Not affected

Vulnerability Llft: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec rstack overflow: Mitigation; safe RET

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB

filling, PBRSB-eIBRS Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	96M	1.5G	16	Unified	3	98304	1	64

-----

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0-3,64-67

node 0 size: 48071 MB

node 0 free: 47706 MB

node 1 cpus: 4-7,68-71

node 1 size: 48381 MB

node 1 free: 48080 MB

node 2 cpus: 8-11,72-75

node 2 size: 48381 MB

node 2 free: 48046 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Platform Notes (Continued)

```
node 3 cpus: 12-15,76-79
node 3 size: 48381 MB
node 3 free: 48014 MB
node 4 cpus: 16-19,80-83
node 4 size: 48381 MB
node 4 free: 48048 MB
node 5 cpus: 20-23,84-87
node 5 size: 48334 MB
node 5 free: 47997 MB
node 6 cpus: 24-27,88-91
node 6 size: 48381 MB
node 6 free: 48045 MB
node 7 cpus: 28-31,92-95
node 7 size: 48381 MB
node 7 free: 48063 MB
node 8 cpus: 32-35,96-99
node 8 size: 48381 MB
node 8 free: 48068 MB
node 9 cpus: 36-39,100-103
node 9 size: 48381 MB
node 9 free: 48067 MB
node 10 cpus: 40-43,104-107
node 10 size: 48381 MB
node 10 free: 48079 MB
node 11 cpus: 44-47,108-111
node 11 size: 48381 MB
node 11 free: 48086 MB
node 12 cpus: 48-51,112-115
node 12 size: 48381 MB
node 12 free: 48081 MB
node 13 cpus: 52-55,116-119
node 13 size: 48381 MB
node 13 free: 48058 MB
node 14 cpus: 56-59,120-123
node 14 size: 48381 MB
node 14 free: 48079 MB
node 15 cpus: 60-63,124-127
node 15 size: 48331 MB
node 15 free: 48040 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  1: 11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
  2: 12  12  10  11  12  12  12  12  32  32  32  32  32  32  32  32
  3: 12  12  12  11  10  12  12  12  32  32  32  32  32  32  32  32
  4: 12  12  12  12  10  11  12  12  32  32  32  32  32  32  32  32
  5: 12  12  12  12  11  10  12  12  32  32  32  32  32  32  32  32
  6: 12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
  7: 12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
  8: 32  32  32  32  32  32  32  32  32  10  11  12  12  12  12  12
  9: 32  32  32  32  32  32  32  32  32  11  10  12  12  12  12  12
 10: 32  32  32  32  32  32  32  32  32  12  12  10  11  12  12  12
 11: 32  32  32  32  32  32  32  32  32  12  12  11  10  12  12  12
 12: 32  32  32  32  32  32  32  32  32  12  12  12  12  10  11  12
 13: 32  32  32  32  32  32  32  32  32  12  12  12  12  11  10  12
 14: 32  32  32  32  32  32  32  32  32  12  12  12  12  12  10  11
 15: 32  32  32  32  32  32  32  32  32  12  12  12  12  12  11  10
```

-----  
9. /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Platform Notes (Continued)

MemTotal: 792271120 kB

-----  
10. who -r  
run-level 5 Mar 2 13:00

-----  
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.7)  
Default Target Status  
graphical degraded

-----  
12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* fwupd-refresh.service loaded failed Refresh fwupd metadata and update motd  
\* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

-----  
13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled ModemManager apparmor blk-availability cloud-config cloud-final cloud-init  
cloud-init-local console-setup cron dmesg e2scrub\_reap finalrd getty@ gpu-manager  
grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent  
multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db  
setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore  
systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds udisks2 ufw  
unattended-upgrades vgaauth  
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs  
disabled console-getty debug-shell iscsid nftables powertop rsync serial-getty@  
systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync upower  
generated apport  
indirect uuid  
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo  
x11-common

-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/vmlinuz-5.15.0-88-generic  
root=/dev/mapper/ubuntu--vg-ubuntu--lv  
ro

-----  
15. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 1.50 GHz and 3.10 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 3100MHz

-----  
16. tuned-adm active  
Current active profile: throughput-performance

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Platform Notes (Continued)

```
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs        60000
defrag                      1
max_ptes_none                511
max_ptes_shared              256
max_ptes_swap                64
pages_to_scan                4096
scan_sleep_millisecs         10000
```

```
-----  
20. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04 LTS
```

```
-----  
21. Disk information
SPEC is set to: /home/cpu2017
Filesystem            Type  Size  Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv ext4  98G  20G  74G  21% /
```

```
-----  
22. /sys/devices/virtual/dmi/id
Vendor:             HPE
Product:            ProLiant DL385 Gen11
Product Family:     ProLiant
Serial:             DL385G11-008
```

```
-----  
23. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

10x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800  
14x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

-----  
24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.50  
BIOS Date: 10/04/2023  
BIOS Revision: 1.50  
Firmware Revision: 1.50

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Compiler Version Notes (Continued)

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

```
=====
Fortran | 548.exchange2_r(base, peak)
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -fno -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather  
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc
```

C++ benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang  
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -futto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

502.gcc\_r: -m32 -f1to -z muldefs -Ofast -march=znver4  
-fveclib=AMDLIB -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline  
-lamdalloc

505.mcf\_r: basepeak = yes

525.x264\_r: basepeak = yes

557.xz\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11  
(3.10 GHz, AMD EPYC 9384X)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

## Peak Optimization Flags (Continued)

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -lamdalloc-ext

541.leela\_r: basepeak = yes

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument  
-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd\_rate\_aocc400\_znver4\_A\_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(3.10 GHz, AMD EPYC 9384X)

SPECrate®2017\_int\_base = 796

SPECrate®2017\_int\_peak = 808

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Nov-2023

Hardware Availability: Oct-2023

Software Availability: Oct-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.5.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-X-rev1.5.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags-A1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-17 08:15:56-0500.

Report generated on 2023-12-06 19:42:07 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-06.