SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Platinum 8592+)

SPECrate®2017_fp_base = 1200

SPECrate®2017_fp_peak = 1220

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

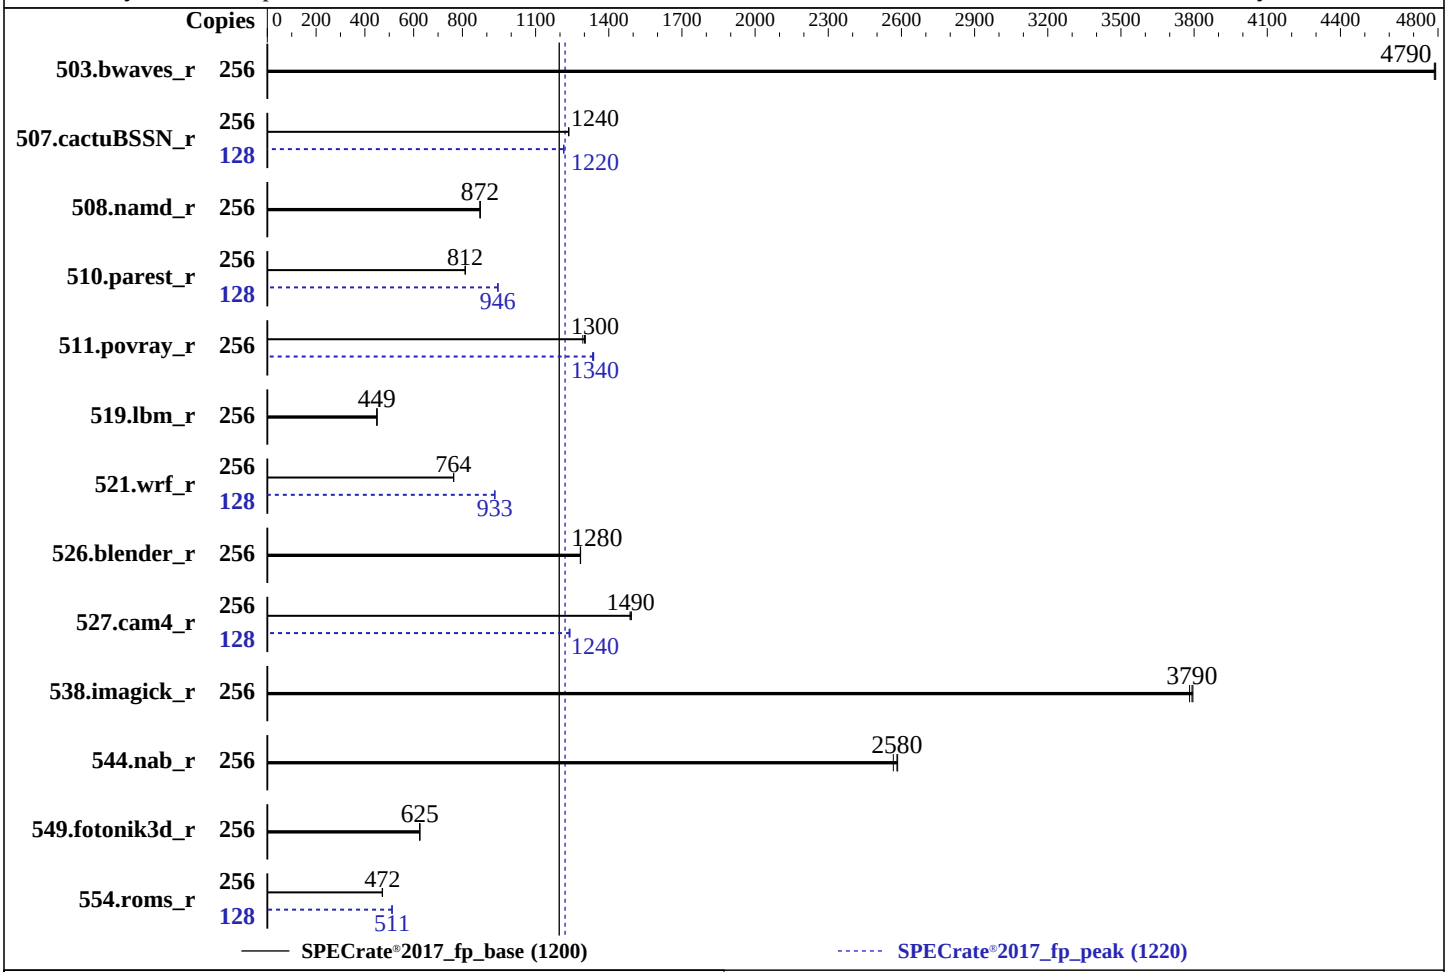

Hardware

CPU Name:	Intel Xeon Platinum 8592+
Max MHz:	3900
Nominal:	1900
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	320 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
Storage:	1 x 960 GB NVMe SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default
Compiler:	C/C++: Version 2023.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 2.0 released Nov-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-221H-TNR
(X13DEM , Intel Xeon Platinum 8592+)

SPECrate®2017_fp_base = 1200

SPECrate®2017_fp_peak = 1220

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Nov-2023
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	537	4780	536	4790	**536**	**4790**	256	537	4780	536	4790	**536**	**4790**
507.cactuBSSN_r	256	262	1240	**262**	**1240**	262	1240	128	133	1220	133	1220	**133**	**1220**
508.namd_r	256	279	873	279	872	**279**	**872**	256	279	873	279	872	**279**	**872**
510.parest_r	256	825	811	**825**	**812**	825	812	128	**354**	**946**	354	946	354	945
511.povray_r	256	462	1290	458	1300	**460**	**1300**	256	448	1330	447	1340	**447**	**1340**
519.lbm_r	256	**600**	**449**	600	450	600	449	256	**600**	**449**	600	450	600	449
521.wrf_r	256	**751**	**764**	751	764	750	764	128	**307**	**933**	307	932	307	933
526.blender_r	256	304	1280	304	1280	**304**	**1280**	256	304	1280	304	1280	**304**	**1280**
527.cam4_r	256	301	1490	300	1490	**300**	**1490**	128	181	1240	180	1240	**181**	**1240**
538.imagick_r	256	168	3780	168	3800	**168**	**3790**	256	168	3780	168	3800	**168**	**3790**
544.nab_r	256	167	2580	**167**	**2580**	168	2570	256	167	2580	**167**	**2580**	168	2570
549.fotonik3d_r	256	1598	624	**1596**	**625**	1595	625	256	1598	624	**1596**	**625**	1595	625
554.roms_r	256	861	472	864	471	**861**	**472**	128	**398**	**511**	398	511	398	511

SPECrate®2017_fp_base = 1200

SPECrate®2017_fp_peak = 1220

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017_new/lib/intel64:/home/cpu2017_new/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

(Continued on next page)

General Notes (Continued)

```
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
 is mitigated in the system as tested and documented.
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
 is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
 Power Technology = Custom
 Power Performance Tuning = BIOS Controls EPB
 ENERGY_PERF_BIAS_CFG mode = Extreme Performance
 KTI Prefetch = Enable
 SNC = Enable SNC2 (2-clusters)
Enable Smart Power = OFF
Fan Mode:Full Speed
Using upgraded fans at 16.8K RPM
Using EVAC heat sinks

 Sysinfo program /home/cpu2017_new/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 195-27 Thu Nov 16 19:19:43 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux 195-27 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043) x86_64
   x86_64 x86_64 GNU/Linux
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
2. w
   19:19:43 up  6:23,  3 users,  load average: 171.50, 234.86, 246.23
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                12:57    6:19m  1.05s  0.01s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4124604
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4124604
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
   ic2023.2-lin-sapphirerapids-rate-20230622.cfg --define smt-on --define cores=128 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
   ic2023.2-lin-sapphirerapids-rate-20230622.cfg --define smt-on --define cores=128 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.014/templogs/preenv.fprate.014.0.log --lognum 014.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_new

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : INTEL(R) XEON(R) PLATINUM 8592+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 207
    stepping        : 2
    microcode       : 0x21000190
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 64
    siblings        : 128
    2 physical ids (chips)
    256 processors (hardware threads)
```

(Continued on next page)

Platform Notes (Continued)

```
    physical id 0: core ids 0-63
    physical id 1: core ids 0-63
    physical id 0: apicids 0-127
    physical id 1: apicids 128-255
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          256
  On-line CPU(s) list:             0-255
  Vendor ID:                       GenuineIntel
  Model name:                      INTEL(R) XEON(R) PLATINUM 8592+
  CPU family:                      6
  Model:                           207
  Thread(s) per core:              2
  Core(s) per socket:              64
  Socket(s):                       2
  Stepping:                        2
  BogoMIPS:                        3800.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                   sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                   lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                   invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                   vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                   bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                   xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                   cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                   avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                   avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                   cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                   arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  Virtualization:                  VT-x
  L1d cache:                       6 MiB (128 instances)
  L1i cache:                       4 MiB (128 instances)
  L2 cache:                        256 MiB (128 instances)
  L3 cache:                        640 MiB (2 instances)
  NUMA node(s):                    4
  NUMA node0 CPU(s):               0-31,128-159
  NUMA node1 CPU(s):               32-63,160-191
  NUMA node2 CPU(s):               64-95,192-223
  NUMA node3 CPU(s):               96-127,224-255
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                   sequence
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1     64        1             64
     L1i       32K       4M    8 Instruction     1     64        1             64
     L2         2M     256M   16 Unified         2   2048        1             64
     L3       320M     640M   20 Unified         3 262144        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-31,128-159
  node 0 size: 257596 MB
  node 0 free: 227304 MB
  node 1 cpus: 32-63,160-191
  node 1 size: 258031 MB
  node 1 free: 232889 MB
  node 2 cpus: 64-95,192-223
  node 2 size: 257997 MB
  node 2 free: 233047 MB
  node 3 cpus: 96-127,224-255
  node 3 size: 257555 MB
  node 3 free: 232747 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055929596 kB

------------------------------------------------------------
10. who -r
  run-level 3 Nov 16 12:57 last=5

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
                   display-manager firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early
                   klog lvm2-monitor nscd nvmefc-boot-connections postfix purge-kernels rollback rsyslog
                   smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl
                   ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebtables
                   exchange-bmc-os-info gpm grub2-once haveged haveged-switch-root ipmi ipmievd
```

(Continued on next page)

Platform Notes (Continued)

```
                  issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
                  nvmf-autoconnect ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
                  smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                  update-system-flatpaks upower vncserver@
  indirect        wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
  root=UUID=475d08b3-7eb6-429c-bff6-902e151200b2
  splash=silent
  resume=/dev/disk/by-uuid/fd0c744c-3382-422c-a977-6b10483703f7
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=402M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
```

(Continued on next page)

Platform Notes (Continued)

```
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000

 ------------------------------------------------------------
 18. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP5

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /home/cpu2017_new
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/nvme0n1p4 xfs   350G  212G  138G  61% /home

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:          Supermicro
     Product:         Super Server
     Product Family: Family
     Serial:          0123456789

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     9x Micron Technology MTC40F2046S1RC56BD1 64 GB 2 rank 5600
     7x Micron Technology MTC40F2046S1RC56BD1 MLCC 64 GB 2 rank 5600


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      2.0
    BIOS Date:         11/04/2023
    BIOS Revision:     5.32
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:
`-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1) `-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

(Continued on next page)

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml
http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-SPR-revG.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-16 22:19:42-0500.
Report generated on 2024-01-03 16:14:01 by CPU2017 PS formatter v6716.
Originally published on 2023-12-14.