SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 3590

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Oct-2023
Software Availability: Jun-2023

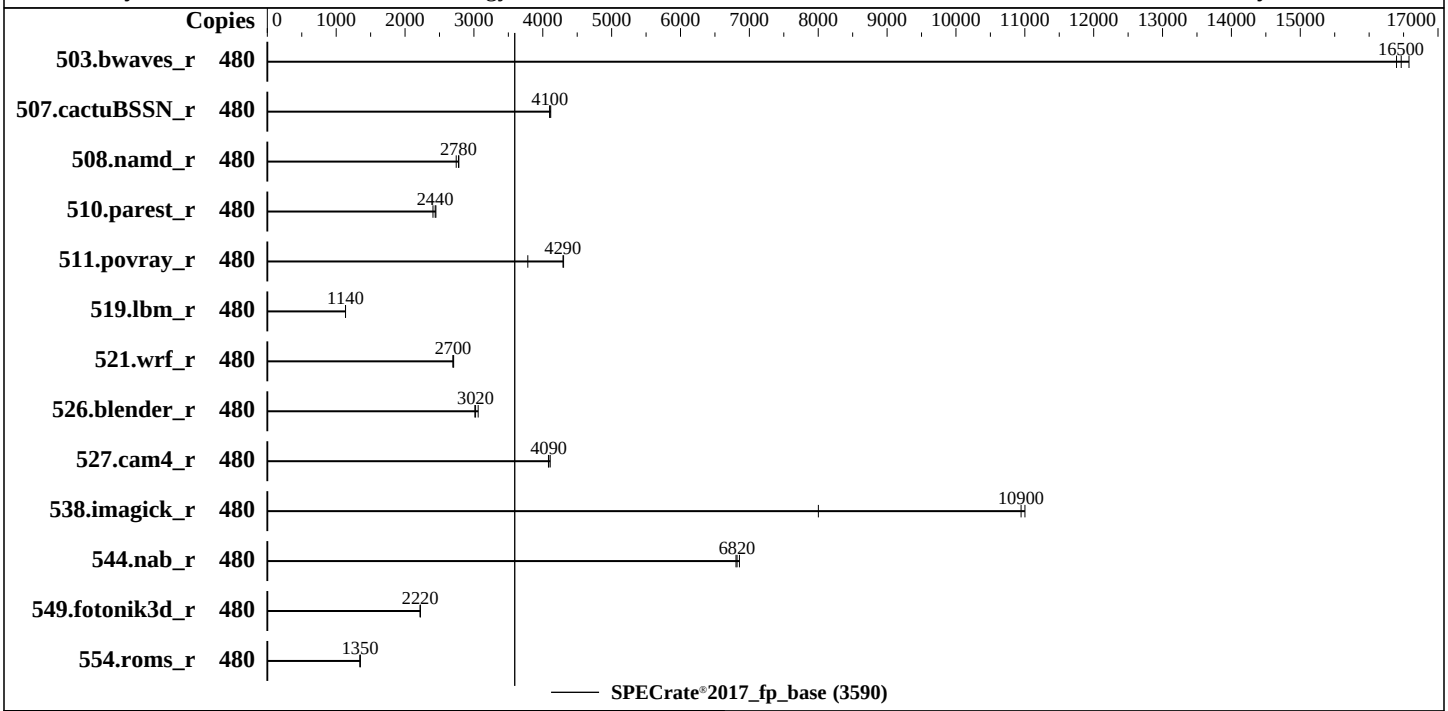

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	480 cores, 8 chips
Orderable:	8 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.2 (Plow) Kernel 5.14.0-284.11.1.el9_2.x86_64
Compiler:	C/C++: Version 2023.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Lenovo BIOS Version EBE103M 1.10 released Oct-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECrate®2017_fp_base = 3590

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2023
Hardware Availability: Oct-2023
Software Availability: Jun-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	480	294	16400	290	16600	**292**	**16500**							
507.cactuBSSN_r	480	148	4120	148	4100	**148**	**4100**							
508.namd_r	480	164	2780	166	2740	**164**	**2780**							
510.parest_r	480	513	2450	522	2410	**515**	**2440**							
511.povray_r	480	296	3780	261	4300	**261**	**4290**							
519.lbm_r	480	445	1140	446	1130	**446**	**1140**							
521.wrf_r	480	**398**	**2700**	397	2710	399	2700							
526.blender_r	480	243	3010	239	3060	**242**	**3020**							
527.cam4_r	480	204	4110	**205**	**4090**	206	4080							
538.imagick_r	480	109	11000	**109**	**10900**	149	8000							
544.nab_r	480	**118**	**6820**	119	6810	118	6860							
549.fotonik3d_r	480	841	2220	843	2220	**842**	**2220**							
554.roms_r	480	**566**	**1350**	566	1350	566	1350							

SPECrate®2017_fp_base = 3590

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.2/lib/intel64:/home/cpu2017-1.1.9-ic2023.2/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
Hyper-Threading set to Disabled
SNC set to SNC4
LLC Prefetch set to Disabled

 Sysinfo program /home/cpu2017-1.1.9-ic2023.2/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Sun Nov 19 09:26:24 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-13.el9_2)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
   2023 x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    09:26:24 up 1 day, 11:18,  1 user,  load average: 257.43, 421.00, 451.53
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1      Fri22    3:46m  1.24s  0.03s /bin/bash ./speccpu_rock.sh
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 16512075
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 16512075
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 31
 login -- root
 -bash
 /bin/bash ./speccpu_rock.sh
 /bin/bash ./speccpu_rock.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 -c
   ic2023.2-lin-sapphirerapids-rate-20230622.cfg --define cores=480 --define physicalfirst --define
   invoke_with_interleave --define drop_caches --tune base -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=480 --configfile
   ic2023.2-lin-sapphirerapids-rate-20230622.cfg --define cores=480 --define physicalfirst --define
   invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode rate
   --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.026/templogs/preenv.fprate.026.0.log --lognum 026.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b0004b1
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 60
    siblings        : 60
    8 physical ids (chips)
    480 processors (hardware threads)
    physical id 0: core ids 0-59
    physical id 1: core ids 0-59
    physical id 2: core ids 0-59
    physical id 3: core ids 0-59
```

(Continued on next page)

Platform Notes (Continued)

```
     physical id 4: core ids 0-59
     physical id 5: core ids 0-59
     physical id 6: core ids 0-59
     physical id 7: core ids 0-59
     physical id 0: apicids
     0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
     ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
     physical id 1: apicids
     128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
     80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
     2,234,236,238,240,242,244,246
     physical id 2: apicids
     256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
     08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
     0,362,364,366,368,370,372,374
     physical id 3: apicids
     384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
     36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
     8,490,492,494,496,498,500,502
     physical id 4: apicids
     512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
     64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
     6,618,620,622,624,626,628,630
     physical id 5: apicids
     640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,6
     92,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724,726,728,730,732,734,736,738,740,742,74
     4,746,748,750,752,754,756,758
     physical id 6: apicids
     768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814,816,818,8
     20,822,824,826,828,830,832,834,836,838,840,842,844,846,848,850,852,854,856,858,860,862,864,866,868,870,87
     2,874,876,878,880,882,884,886
     physical id 7: apicids
     896,898,900,902,904,906,908,910,912,914,916,918,920,922,924,926,928,930,932,934,936,938,940,942,944,946,9
     48,950,952,954,956,958,960,962,964,966,968,970,972,974,976,978,980,982,984,986,988,990,992,994,996,998,10
     00,1002,1004,1006,1008,1010,1012,1014
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          480
   On-line CPU(s) list:             0-479
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel(R) Corporation
   Model name:                      Intel(R) Xeon(R) Platinum 8490H
   BIOS Model name:                 Intel(R) Xeon(R) Platinum 8490H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              1
   Core(s) per socket:              60
   Socket(s):                       8
   Stepping:                        8
   CPU max MHz:                     3500.0000
   CPU min MHz:                     800.0000
```

(Continued on next page)

Platform Notes (Continued)

```
BogoMIPS:                        3800.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                 lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                 nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                                 vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                 abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                                 flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                                 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                 clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                 avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                                 ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                 tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                 enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                                 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:                  VT-x
L1d cache:                       22.5 MiB (480 instances)
L1i cache:                       15 MiB (480 instances)
L2 cache:                        960 MiB (480 instances)
L3 cache:                        900 MiB (8 instances)
NUMA node(s):                    32
NUMA node0 CPU(s):               0-14
NUMA node1 CPU(s):               15-29
NUMA node2 CPU(s):               30-44
NUMA node3 CPU(s):               45-59
NUMA node4 CPU(s):               60-74
NUMA node5 CPU(s):               75-89
NUMA node6 CPU(s):               90-104
NUMA node7 CPU(s):               105-119
NUMA node8 CPU(s):               120-134
NUMA node9 CPU(s):               135-149
NUMA node10 CPU(s):              150-164
NUMA node11 CPU(s):              165-179
NUMA node12 CPU(s):              180-194
NUMA node13 CPU(s):              195-209
NUMA node14 CPU(s):              210-224
NUMA node15 CPU(s):              225-239
NUMA node16 CPU(s):              240-254
NUMA node17 CPU(s):              255-269
NUMA node18 CPU(s):              270-284
NUMA node19 CPU(s):              285-299
NUMA node20 CPU(s):              300-314
NUMA node21 CPU(s):              315-329
NUMA node22 CPU(s):              330-344
NUMA node23 CPU(s):              345-359
NUMA node24 CPU(s):              360-374
NUMA node25 CPU(s):              375-389
NUMA node26 CPU(s):              390-404
NUMA node27 CPU(s):              405-419
NUMA node28 CPU(s):              420-434
NUMA node29 CPU(s):              435-449
NUMA node30 CPU(s):              450-464
NUMA node31 CPU(s):              465-479
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                   sequence
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K    22.5M   12 Data            1     64        1             64
     L1i       32K      15M    8 Instruction     1     64        1             64
     L2         2M     960M   16 Unified         2   2048        1             64
     L3     112.5M     900M   15 Unified         3 122880        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 32 nodes (0-31)
  node 0 cpus: 0-14
  node 0 size: 128485 MB
  node 0 free: 127579 MB
  node 1 cpus: 15-29
  node 1 size: 129020 MB
  node 1 free: 128229 MB
  node 2 cpus: 30-44
  node 2 size: 129020 MB
  node 2 free: 128209 MB
  node 3 cpus: 45-59
  node 3 size: 129020 MB
  node 3 free: 128264 MB
  node 4 cpus: 60-74
  node 4 size: 129020 MB
  node 4 free: 128273 MB
  node 5 cpus: 75-89
  node 5 size: 129020 MB
  node 5 free: 128287 MB
  node 6 cpus: 90-104
  node 6 size: 129020 MB
  node 6 free: 128261 MB
  node 7 cpus: 105-119
  node 7 size: 129020 MB
  node 7 free: 128298 MB
  node 8 cpus: 120-134
  node 8 size: 129020 MB
  node 8 free: 128206 MB
  node 9 cpus: 135-149
  node 9 size: 129020 MB
  node 9 free: 128293 MB
  node 10 cpus: 150-164
  node 10 size: 129020 MB
  node 10 free: 128281 MB
  node 11 cpus: 165-179
  node 11 size: 129020 MB
  node 11 free: 128246 MB
  node 12 cpus: 180-194
  node 12 size: 129020 MB
  node 12 free: 128229 MB
  node 13 cpus: 195-209
```

(Continued on next page)

Platform Notes (Continued)

```
node 13 size: 129020 MB
node 13 free: 128278 MB
node 14 cpus: 210-224
node 14 size: 129020 MB
node 14 free: 128289 MB
node 15 cpus: 225-239
node 15 size: 129020 MB
node 15 free: 128301 MB
node 16 cpus: 240-254
node 16 size: 129020 MB
node 16 free: 128283 MB
node 17 cpus: 255-269
node 17 size: 129020 MB
node 17 free: 128282 MB
node 18 cpus: 270-284
node 18 size: 129020 MB
node 18 free: 128269 MB
node 19 cpus: 285-299
node 19 size: 128981 MB
node 19 free: 128216 MB
node 20 cpus: 300-314
node 20 size: 129020 MB
node 20 free: 128268 MB
node 21 cpus: 315-329
node 21 size: 129020 MB
node 21 free: 128255 MB
node 22 cpus: 330-344
node 22 size: 129020 MB
node 22 free: 128252 MB
node 23 cpus: 345-359
node 23 size: 129020 MB
node 23 free: 128256 MB
node 24 cpus: 360-374
node 24 size: 129020 MB
node 24 free: 128299 MB
node 25 cpus: 375-389
node 25 size: 129020 MB
node 25 free: 128275 MB
node 26 cpus: 390-404
node 26 size: 129020 MB
node 26 free: 128291 MB
node 27 cpus: 405-419
node 27 size: 129020 MB
node 27 free: 127848 MB
node 28 cpus: 420-434
node 28 size: 129020 MB
node 28 free: 128250 MB
node 29 cpus: 435-449
node 29 size: 129020 MB
node 29 free: 128266 MB
node 30 cpus: 450-464
node 30 size: 129020 MB
node 30 free: 128278 MB
node 31 cpus: 465-479
node 31 size: 128996 MB
node 31 free: 128262 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
25  26  27  28  29  30  31
  0:  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
 21  21  21  31  31  31  31
 1:  12  10  12  12  21  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
 21  21  21  31  31  31  31
 2:  12  12  10  12  21  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
 21  21  21  31  31  31  31
 3:  12  12  12  10  21  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
 21  21  21  31  31  31  31
 4:  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
 5:  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
 6:  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
 7:  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
 8:  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
 9:  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
10:  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31
31  31  31  21  21  21  21
11:  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31
31  31  31  21  21  21  21
12:  31  31  31  31  21  21  21  21  21  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21
21  21  21  31  31  31  31
13:  31  31  31  31  21  21  21  21  21  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21
21  21  21  31  31  31  31
14:  31  31  31  31  21  21  21  21  21  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21
21  21  21  31  31  31  31
15:  31  31  31  31  21  21  21  21  21  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21
21  21  21  31  31  31  31
16:  31  31  31  31  21  21  21  21  21  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21
21  21  21  31  31  31  31
17:  31  31  31  31  21  21  21  21  21  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21
21  21  21  31  31  31  31
18:  31  31  31  31  21  21  21  21  21  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21
21  21  21  31  31  31  31
19:  31  31  31  31  21  21  21  21  21  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21
21  21  21  31  31  31  31
20:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31
31  31  31  21  21  21  21
21:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31
31  31  31  21  21  21  21
22:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31
31  31  31  21  21  21  21
23:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31
31  31  31  21  21  21  21
24:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10
12  12  12  21  21  21  21
25:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
10  12  12  21  21  21  21
26:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
12  10  12  21  21  21  21
27:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
12  12  10  21  21  21  21
28:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
21  21  21  10  12  12  12
29:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
21  21  21  12  10  12  12
30:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
    21  21  21  12  12  10  12
    31:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
    21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       4227132308 kB

------------------------------------------------------------
10. who -r
  run-level 3 Nov 17 22:08

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-13.el9_2)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                   dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
                   mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark
                   sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
  enabled-runtime  systemd-remount-fs
  disabled         canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                   chrony-wait console-getty cpupower debug-shell dnf-system-upgrade kvm_stat
                   man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
                   selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
                   systemd-pstore systemd-sysext
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                   systemd-sysupdate-reboot

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd1,gpt2)/boot/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
  root=UUID=116409c2-57ac-4857-ace6-bb315b1769ff
  ro
  resume=UUID=075e4fda-52f2-4584-8323-c813820fb1bd

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.50 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.2 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
  system-release Red Hat Enterprise Linux release 9.2 (Plow)

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sdb4      xfs   371G  191G  181G  52% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR950 V3
    Product Family: ThinkSystem
    Serial:         BLRSDV044

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    41x SK Hynix HMCG94AEBRA102N 64 GB 2 rank 4800
    14x SK Hynix HMCG94AEBRA109N 64 GB 2 rank 4800
    9x SK Hynix HMCG94AEBRA123N 64 GB 2 rank 4800
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Lenovo
    BIOS Version:      EBE103M-1.10
    BIOS Date:         10/10/2023
    BIOS Revision:     1.10
    Firmware Revision: 1.10
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.0 Build 20230622
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-18 20:26:23-0500.
Report generated on 2023-12-11 09:57:14 by CPU2017 PS formatter v6716.
Originally published on 2023-12-11.