SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Silver 4410Y)

SPECrate®2017_int_base = 213

SPECrate®2017_int_peak = 219

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2023
Hardware Availability: Oct-2023
Software Availability: Dec-2023

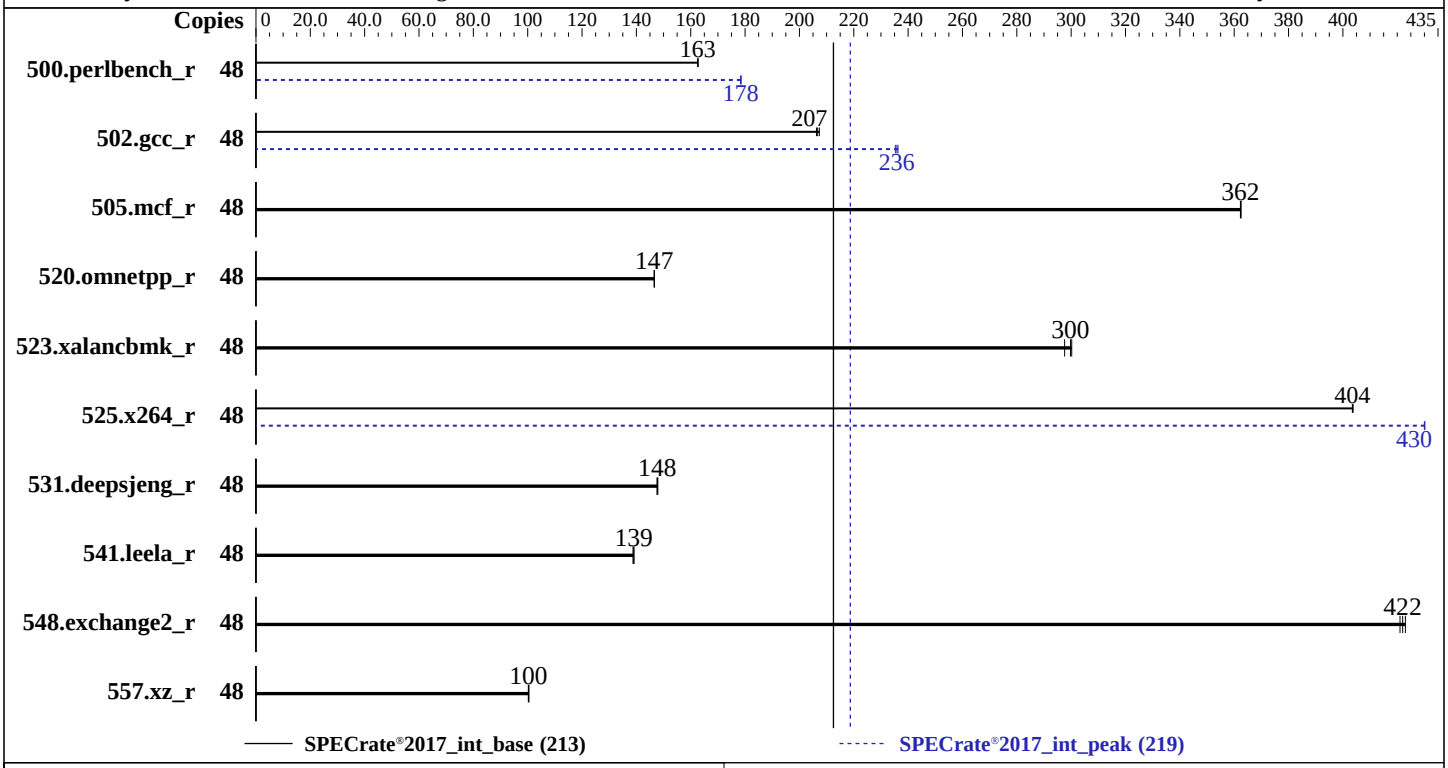

Hardware

CPU Name:	Intel Xeon Silver 4410Y
Max MHz:	3900
Nominal:	2000
Enabled:	24 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	30 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx8 PC5-4800B-R, running at 4000)
Storage:	1 x 960 GB SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) 5.14.0-70.22.1.el9_0.x86_64
Compiler:	C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 5.29 released Oct-2023 BIOS
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4700 G6 (Intel Xeon Silver 4410Y)

SPECrate®2017_int_base = 213

SPECrate®2017_int_peak = 219

CPU2017 License: 9066
Test Sponsor: New H3C Technologies Co., Ltd.
Tested by: New H3C Technologies Co., Ltd.

Test Date: Dec-2023
Hardware Availability: Oct-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	**470**	**163**	470	163	470	163	48	**428**	**178**	428	178	428	178
502.gcc_r	48	330	206	328	207	**329**	**207**	48	**288**	**236**	289	235	288	236
505.mcf_r	48	**214**	**362**	214	363	214	362	48	**214**	**362**	214	363	214	362
520.omnetpp_r	48	429	147	**430**	**147**	430	147	48	429	147	**430**	**147**	430	147
523.xalancbmk_r	48	**169**	**300**	170	298	169	300	48	**169**	**300**	170	298	169	300
525.x264_r	48	208	403	**208**	**404**	208	404	48	195	430	195	430	**195**	**430**
531.deepsjeng_r	48	373	148	372	148	**372**	**148**	48	373	148	372	148	**372**	**148**
541.leela_r	48	573	139	**572**	**139**	571	139	48	573	139	**572**	**139**	571	139
548.exchange2_r	48	**298**	**422**	299	421	297	423	48	**298**	**422**	299	421	297	423
557.xz_r	48	517	100	516	100	**517**	**100**	48	517	100	516	100	**517**	**100**

SPECrate®2017_int_base = 213

SPECrate®2017_int_peak = 219

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
 Set SNC to Enable SNC4 (4-clusters)
 Set Power Performance Tuning to BIOS Controls EFB
 Set ENERGY_PERF_BIAS_CFG mode to Performance

 Sysinfo program /home/speccpu/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Mon Dec 18 10:34:17 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
   x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    10:34:17 up 1 day, 18:23,  2 users,  load average: 0.02, 9.73, 28.00
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1      Sat16    9.00s  0.84s  0.01s -bash
   root     pts/0     09:22    3:24   0.02s  0.02s -bash

 ------------------------------------------------------------
 3. Username
```

(Continued on next page)

Platform Notes (Continued)

```
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 4124753
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 4124753
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 -c
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=48 --configfile
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=24 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.009/templogs/preenv.intrate.009.0.log --lognum 009.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Silver 4410Y
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b000461
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 12
    siblings        : 24
    2 physical ids (chips)
    48 processors (hardware threads)
    physical id 0: core ids 0-11
    physical id 1: core ids 0-11
    physical id 0: apicids 0-23
    physical id 1: apicids 128-151
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          48
  On-line CPU(s) list:             0-47
  Vendor ID:                       GenuineIntel
  BIOS Vendor ID:                  Intel(R) Corporation
  Model name:                      Intel(R) Xeon(R) Silver 4410Y
  BIOS Model name:                 Intel(R) Xeon(R) Silver 4410Y
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              2
  Core(s) per socket:              12
  Socket(s):                       2
  Stepping:                        8
  CPU max MHz:                     3900.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        4000.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                   sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                   lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                   invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                   tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                                   smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                   xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                   cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                   arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                                   ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                   tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                   enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                   amx_tile flush_l1d arch_capabilities
  Virtualization:                  VT-x
  L1d cache:                       1.1 MiB (24 instances)
  L1i cache:                       768 KiB (24 instances)
  L2 cache:                        48 MiB (24 instances)
  L3 cache:                        60 MiB (2 instances)
  NUMA node(s):                    4
  NUMA node0 CPU(s):               0-5,24-29
  NUMA node1 CPU(s):               6-11,30-35
  NUMA node2 CPU(s):               12-17,36-41
  NUMA node3 CPU(s):               18-23,42-47
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     1.1M   12 Data            1    64        1             64
     L1i       32K     768K    8 Instruction     1    64        1             64
     L2         2M      48M   16 Unified         2  2048        1             64
     L3        30M      60M   15 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-5,24-29
  node 0 size: 257125 MB
  node 0 free: 246958 MB
  node 1 cpus: 6-11,30-35
  node 1 size: 258045 MB
  node 1 free: 251273 MB
  node 2 cpus: 12-17,36-41
  node 2 size: 258045 MB
  node 2 free: 251118 MB
  node 3 cpus: 18-23,42-47
  node 3 size: 258034 MB
  node 3 free: 250781 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055999832 kB

------------------------------------------------------------
10. who -r
  run-level 3 Dec 16 16:10

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
                   gdm getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
                   lm_sensors low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd
                   nis-domainname nvmefc-boot-connections ostree-remount pmcd pmie pmlogger
                   power-profiles-daemon qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon
                   selinux-autorelabel-mark smartd sshd sssd switcheroo-control sysstat
                   systemd-network-generator tuned udisks2 upower vgauthd virtqemud vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
                   dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe grafana-server gssproxy httpd
                   httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon
                   libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
```

(Continued on next page)

Platform Notes (Continued)

```
                  nfs-server nftables nmb numad nvmf-autoconnect pmfind pmie_farm pmlogger_farm pmproxy
                  podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
                  rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb
                  spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
                  systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target
                  targetclid trace-cmd virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd
                  virtsecretd virtstoraged vsftpd wpa_supplicant
  indirect        pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                  virtlockd virtlogd vsftpd@

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet
  selinux=0

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.90 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/speccpu
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   819G  163G  656G  20% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         H3C
    Product:        RS33M2C9S
    Product Family: Rack

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Micron MTC40F2046S1RC48BA1 64 GB 2 rank 4800, configured at 4000


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      6.00.30
   BIOS Date:         10/20/2023
   BIOS Revision:     5.29
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-DSPEC_LP64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin -lqkmalloc`

C++ benchmarks:
`-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin -lqkmalloc`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin -lqkmalloc`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.html`
`http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevC.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64_revB.xml`
`http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevC.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-17 21:34:17-0500.
Report generated on 2024-01-03 16:30:43 by CPU2017 PS formatter v6716.
Originally published on 2024-01-03.