SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1020

SPECrate®2017_int_peak = 1050

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Feb-2024
Software Availability: Dec-2023

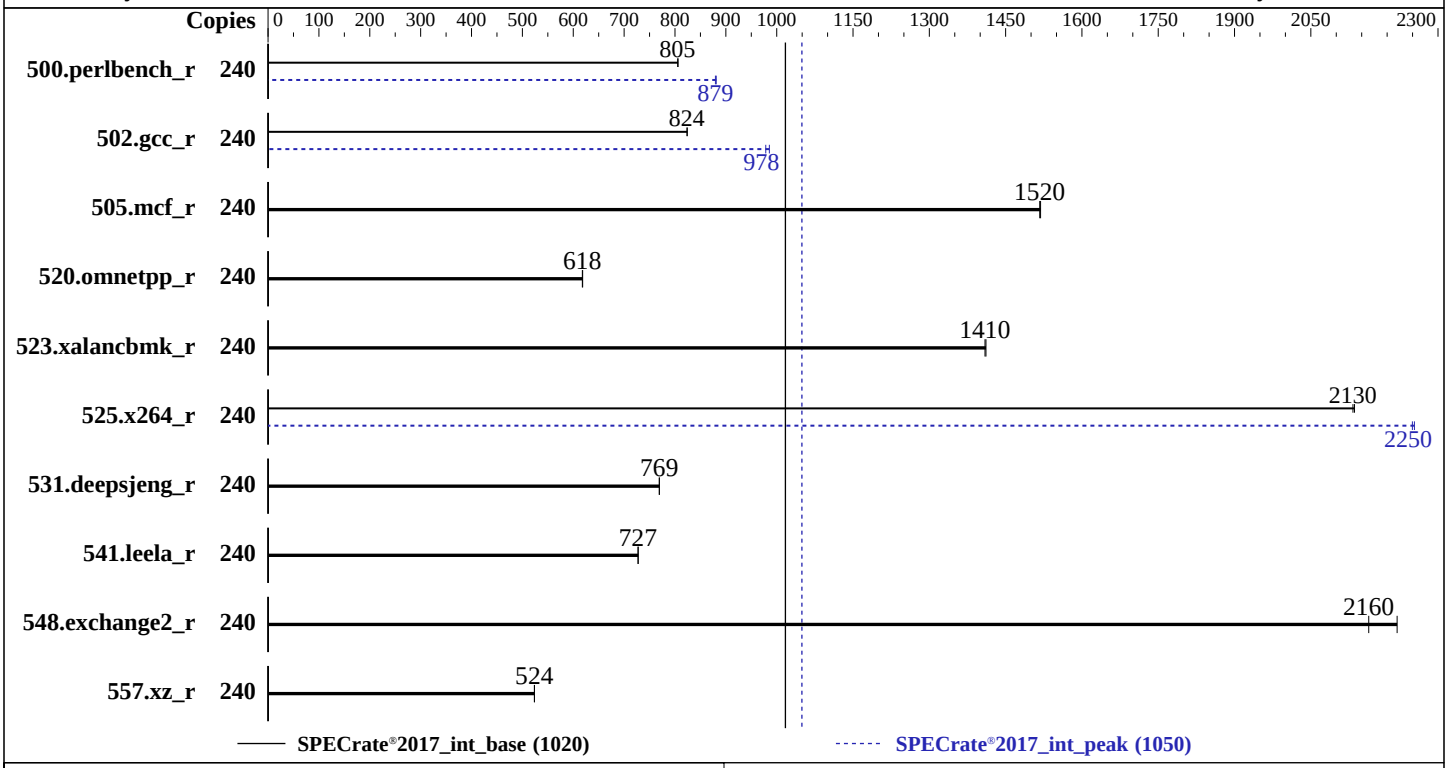

Hardware

CPU Name:	Intel Xeon Platinum 8580
Max MHz:	4000
Nominal:	2000
Enabled:	120 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	300 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
Storage:	130 GB on tmpfs
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default
Compiler:	C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.9.11 released Oct-2023
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6620 (Intel Xeon Platinum 8580)

SPECrate®2017_int_base = 1020

SPECrate®2017_int_peak = 1050

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	240	474	806	**474**	**805**			240	434	881	**434**	**879**		
502.gcc_r	240	**413**	**824**	412	824			240	**347**	**978**	345	986		
505.mcf_r	240	**256**	**1520**	255	1520			240	**256**	**1520**	255	1520		
520.omnetpp_r	240	**510**	**618**	509	618			240	**510**	**618**	509	618		
523.xalancbmk_r	240	180	1410	**180**	**1410**			240	180	1410	**180**	**1410**		
525.x264_r	240	197	2140	**197**	**2130**			240	186	2250	**187**	**2250**		
531.deepsjeng_r	240	**358**	**769**	358	769			240	**358**	**769**	358	769		
541.leela_r	240	546	728	**546**	**727**			240	546	728	**546**	**727**		
548.exchange2_r	240	283	2220	**291**	**2160**			240	283	2220	**291**	**2160**		
557.xz_r	240	495	524	**495**	**524**			240	495	524	**495**	**524**		

SPECrate®2017_int_base = 1020

SPECrate®2017_int_peak = 1050

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/mnt
     /ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

(Continued on next page)

General Notes (Continued)

```
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 130 GB ramdisk created with the cmd: "mount -t tmpfs -o size=130G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
                ADDDC Setting : Disabled
       DIMM Self Healing on
   Uncorrectable Memory Error : Disabled

     Virtualization Technology : Disabled
       DCU Streamer Prefetcher : Disabled
              Sub NUMA Cluster : 2-way Clustering
                  LLC Prefetch : Disabled
          Dead Line LLC Alloc : Disabled
               Optimizer Mode : Enabled

               System Profile : Custom
         CPU Power Management : Maximum Performance
                          C1E : Disabled
                      C States : Autonomous
          Memory Patrol Scrub : Disabled
     Energy Efficiency Policy : Performance
            PCI ASPM L1 Link
              Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Dec  4 23:18:11 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
```

(Continued on next page)

Platform Notes (Continued)

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   23:18:11 up 1 min,  1 user,  load average: 0.99, 0.41, 0.15
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                23:17   27.00s  0.91s  0.00s /bin/bash ./dell-run-speccpu.sh rate
  --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define
  DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4125924
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4125924
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 /bin/bash ./DELL_rate.sh
 /bin/bash ./dell-run-main.sh rate
 /bin/bash ./dell-run-main.sh rate
 /bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
   --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1
 /bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
   --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 -c
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=120 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all --define DL-BIOS-SNC=2
   --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
```

(Continued on next page)

Platform Notes (Continued)

```
    DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1 intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=240 --configfile
    ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=120 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --define
    DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
    DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1 --nopower
    --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3

------------------------------------------------------------
6. /proc/cpuinfo
     model name      : INTEL(R) XEON(R) PLATINUM 8580
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 207
     stepping        : 2
     microcode       : 0x210001a0
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
     cpu cores       : 60
     siblings        : 120
     2 physical ids (chips)
     240 processors (hardware threads)
     physical id 0: core ids 0-59
     physical id 1: core ids 0-59
     physical id 0: apicids 0-119
     physical id 1: apicids 128-247
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          240
   On-line CPU(s) list:             0-239
   Vendor ID:                       GenuineIntel
   Model name:                      INTEL(R) XEON(R) PLATINUM 8580
   CPU family:                      6
   Model:                           207
   Thread(s) per core:              2
   Core(s) per socket:              60
   Socket(s):                       2
   Stepping:                        2
   BogoMIPS:                        4000.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                    x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                    abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                    cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                                    avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
```

(Continued on next page)

Platform Notes (Continued)

```
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  L1d cache:            5.6 MiB (120 instances)
  L1i cache:            3.8 MiB (120 instances)
  L2 cache:             240 MiB (120 instances)
  L3 cache:             600 MiB (2 instances)
  NUMA node(s):         4
  NUMA node0 CPU(s):    0,4,8,10,14,18,24,28,32,36,40,44,48,52,58,62,64,68,72,76,80,84,88,92,96,10
                        0,104,108,112,116,120,124,128,130,134,138,144,148,152,156,160,164,168,172,
                        178,182,184,188,192,196,200,204,208,212,216,220,224,228,232,236
  NUMA node1 CPU(s):    2,6,12,16,20,22,26,30,34,38,42,46,50,54,56,60,66,70,74,78,82,86,90,94,98,1
                        02,106,110,114,118,122,126,132,136,140,142,146,150,154,158,162,166,170,174
                        ,176,180,186,190,194,198,202,206,210,214,218,222,226,230,234,238
  NUMA node2 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,67,71,75,79,83,87,91,95,99
                        ,103,107,111,115,121,125,129,133,137,141,145,149,153,157,161,165,169,173,1
                        77,181,185,187,191,195,199,203,207,211,215,219,223,227,231,235
  NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,69,73,77,81,85,89,93,97,101,
                        105,109,113,117,119,123,127,131,135,139,143,147,151,155,159,163,167,171,17
                        5,179,183,189,193,197,201,205,209,213,217,221,225,229,233,237,239
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                   sequence
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     5.6M   12 Data            1     64        1             64
     L1i       32K     3.8M    8 Instruction     1     64        1             64
     L2         2M     240M   16 Unified         2   2048        1             64
     L3       300M     600M   20 Unified         3 245760        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus:
  0,4,8,10,14,18,24,28,32,36,40,44,48,52,58,62,64,68,72,76,80,84,88,92,96,100,104,108,112,116,120,124,128,130
  ,134,138,144,148,152,156,160,164,168,172,178,182,184,188,192,196,200,204,208,212,216,220,224,228,232,236
  node 0 size: 257451 MB
  node 0 free: 256575 MB
  node 1 cpus:
  2,6,12,16,20,22,26,30,34,38,42,46,50,54,56,60,66,70,74,78,82,86,90,94,98,102,106,110,114,118,122,126,132,13
  6,140,142,146,150,154,158,162,166,170,174,176,180,186,190,194,198,202,206,210,214,218,222,226,230,234,238
  node 1 size: 258032 MB
  node 1 free: 257395 MB
  node 2 cpus:
  1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,67,71,75,79,83,87,91,95,99,103,107,111,115,121,125,129,133,
  137,141,145,149,153,157,161,165,169,173,177,181,185,187,191,195,199,203,207,211,215,219,223,227,231,235
```

(Continued on next page)

Platform Notes (Continued)

```
  node 2 size: 258032 MB
  node 2 free: 246989 MB
  node 3 cpus:
  3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,69,73,77,81,85,89,93,97,101,105,109,113,117,119,123,127,131,1
  35,139,143,147,151,155,159,163,167,171,175,179,183,189,193,197,201,205,209,213,217,221,225,229,233,237,239
  node 3 size: 257994 MB
  node 3 free: 257430 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056267384 kB

------------------------------------------------------------
10. who -r
  run-level 3 Dec 4 23:17

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
                   irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore tuned wicked
                   wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info gpm
                   grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                   man-db-create multipathd nfs nfs-blkmap nvmf-autoconnect rpcbind rpmconfigcheck rsyncd
                   serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                   vncserver@
  indirect         wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
  root=UUID=a980d06c-c41f-4c9d-8603-80e11879418a
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     10
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP5

------------------------------------------------------------
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  130G  5.1G  125G   4% /mnt/ramdisk

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge C6620
    Product Family: PowerEdge
```

(Continued on next page)

Platform Notes (Continued)

```
     Serial:         SC662L1

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x 00CE042300CE M321R8GA0PB0-CWMCH 64 GB 2 rank 5600


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.9.11
    BIOS Date:         10/26/2023
    BIOS Revision:     1.9
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
Fortran | 548.exchange2_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-05 00:18:10-0500.
Report generated on 2024-01-03 17:32:53 by CPU2017 PS formatter v6716.
Originally published on 2024-01-02.