SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_base = 941

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

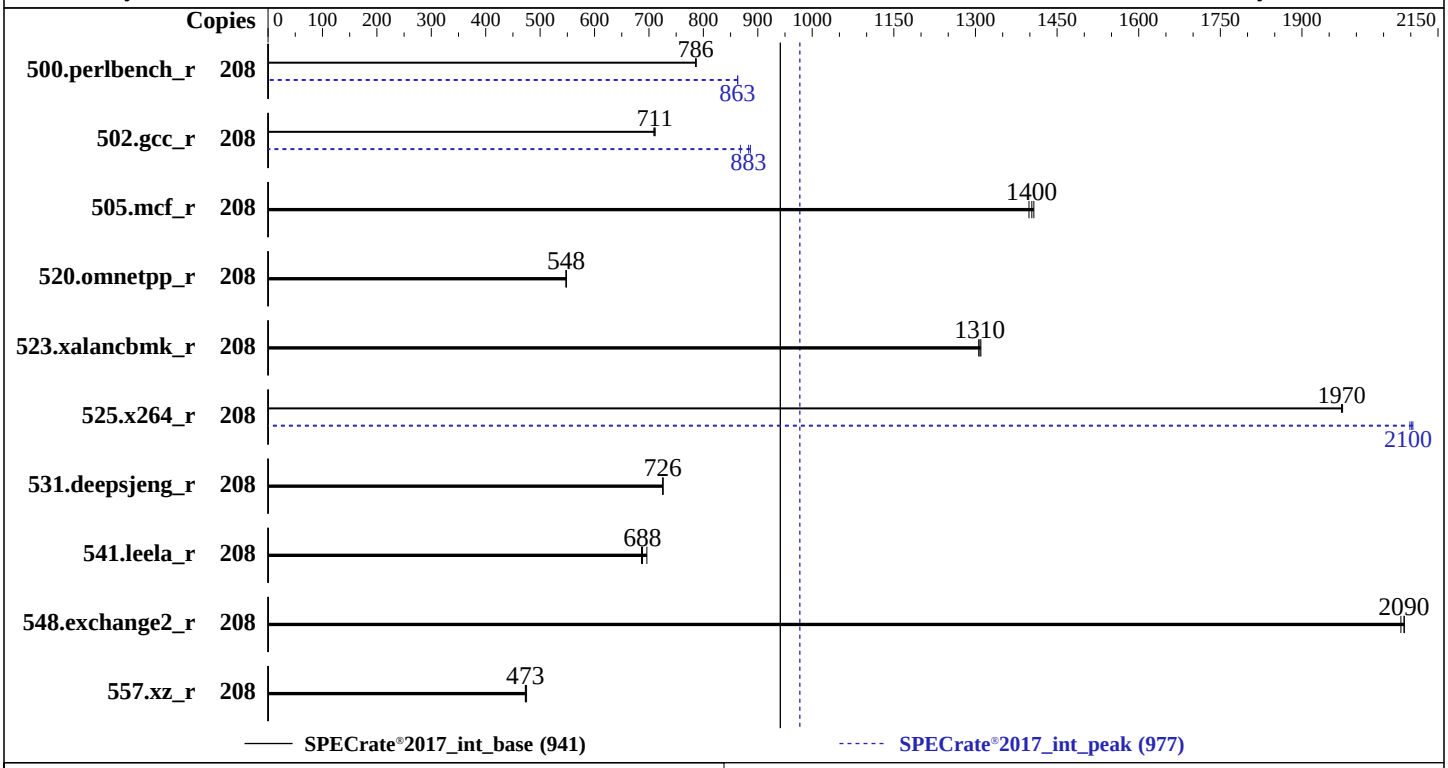

Hardware

CPU Name:	Intel Xeon Platinum 8470Q
Max MHz:	3800
Nominal:	2100
Enabled:	104 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 960 GB NVME SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) 5.14.0-70.22.1.el9_0.x86_64
Compiler:	C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Nettrix BIOS Version NNH1041060 released Sep-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Nettrix

R620 G50 LP (Intel Xeon Platinum 8470Q, 2.10 GHz)

SPECrate®2017_int_base = 941

SPECrate®2017_int_peak = 977

CPU2017 License: 6138
Test Sponsor: Nettrix
Tested by: Nettrix

Test Date: Dec-2023
Hardware Availability: Jan-2023
Software Availability: Jan-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	208	**421**	**786**	421	786	421	787	208	384	863	384	863	**384**	**863**
502.gcc_r	208	415	709	**415**	**711**	414	711	208	339	868	**333**	**883**	332	886
505.mcf_r	208	239	1410	**239**	**1400**	240	1400	208	239	1410	**239**	**1400**	240	1400
520.omnetpp_r	208	498	548	498	548	**498**	**548**	208	498	548	498	548	**498**	**548**
523.xalancbmk_r	208	**168**	**1310**	168	1310	168	1310	208	**168**	**1310**	168	1310	168	1310
525.x264_r	208	184	1970	185	1970	**185**	**1970**	208	**173**	**2100**	174	2100	173	2100
531.deepsjeng_r	208	328	726	**329**	**726**	329	725	208	328	726	**329**	**726**	329	725
541.leela_r	208	**501**	**688**	495	696	502	686	208	**501**	**688**	495	696	502	686
548.exchange2_r	208	261	2090	262	2080	**261**	**2090**	208	261	2090	262	2080	**261**	**2090**
557.xz_r	208	473	475	**475**	**473**	475	473	208	473	475	**475**	**473**	475	473

SPECrate®2017_int_base = 941

SPECrate®2017_int_peak = 977

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/tzk/SPECcpu/lib/intel64:/home/tzk/SPECcpu/lib/ia32:/home/tzk/SPECcpu/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA : The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
  is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
  is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
  is mitigated in the system as tested and documented.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

(Continued on next page)

General Notes (Continued)

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
  SNC (Sub NUMA) set to Enable SNC4 (4-clusters)
  Patrol Scrub set to Disabled
  LLC dead line alloc set to Disabled
  DCU Streamer Prefetcher set to Disabled
  Hardware P-States set to Native Mode

Sysinfo program /home/tzk/SPECcpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Dec 18 22:24:11 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. Systemd service manager version: systemd 250 (250-6.el9_0)
11. Failed units, from systemctl list-units --state=failed
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.22.1.el9_0.x86_64 #1 SMP PREEMPT Tue Aug 2 10:02:12 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   22:24:11 up 18:12,  1 user,  load average: 0.25, 4.26, 58.69
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     :1        04:12   ?xdm?  16:27   0.00s /usr/libexec/gdm-x-session --register-session --run-script
  gnome-session
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 4124447
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 4124447
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 /usr/lib/systemd/systemd --user
 /usr/libexec/gnome-terminal-server
 bash
 bash
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 -c
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=104 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=208 --configfile
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=104 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.437/templogs/preenv.intrate.437.0.log --lognum 437.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/tzk/SPECcpu

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8470Q
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b0004d0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 52
    siblings        : 104
    2 physical ids (chips)
    208 processors (hardware threads)
    physical id 0: core ids 0-51
    physical id 1: core ids 0-51
    physical id 0: apicids 0-103
    physical id 1: apicids 128-231
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
```

(Continued on next page)

Platform Notes (Continued)

```
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          208
  On-line CPU(s) list:             0-207
  Vendor ID:                       GenuineIntel
  BIOS Vendor ID:                  Intel(R) Corporation
  Model name:                      Intel(R) Xeon(R) Platinum 8470Q
  BIOS Model name:                 Intel(R) Xeon(R) Platinum 8470Q
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              2
  Core(s) per socket:              52
  Socket(s):                       2
  Stepping:                        8
  CPU max MHz:                     3800.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        4200.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                                   vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                   x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                   abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                   intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                                   flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                                   invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                   clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                   xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                   avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
                                   hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                                   vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                   bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                   tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  Virtualization:                  VT-x
  L1d cache:                       4.9 MiB (104 instances)
  L1i cache:                       3.3 MiB (104 instances)
  L2 cache:                        208 MiB (104 instances)
  L3 cache:                        210 MiB (2 instances)
  NUMA node(s):                    8
  NUMA node0 CPU(s):               0-12,104-116
  NUMA node1 CPU(s):               13-25,117-129
  NUMA node2 CPU(s):               26-38,130-142
  NUMA node3 CPU(s):               39-51,143-155
  NUMA node4 CPU(s):               52-64,156-168
  NUMA node5 CPU(s):               65-77,169-181
  NUMA node6 CPU(s):               78-90,182-194
  NUMA node7 CPU(s):               91-103,195-207
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     4.9M   12 Data            1     64        1             64
     L1i       32K     3.3M    8 Instruction     1     64        1             64
     L2         2M     208M   16 Unified         2   2048        1             64
     L3       105M     210M   15 Unified         3 114688        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-12,104-116
  node 0 size: 128099 MB
  node 0 free: 126517 MB
  node 1 cpus: 13-25,117-129
  node 1 size: 129018 MB
  node 1 free: 127740 MB
  node 2 cpus: 26-38,130-142
  node 2 size: 129018 MB
  node 2 free: 127581 MB
  node 3 cpus: 39-51,143-155
  node 3 size: 129018 MB
  node 3 free: 127164 MB
  node 4 cpus: 52-64,156-168
  node 4 size: 129018 MB
  node 4 free: 127797 MB
  node 5 cpus: 65-77,169-181
  node 5 size: 129018 MB
  node 5 free: 127838 MB
  node 6 cpus: 78-90,182-194
  node 6 size: 128981 MB
  node 6 free: 127817 MB
  node 7 cpus: 91-103,195-207
  node 7 size: 128998 MB
  node 7 free: 127830 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
    6:  21  21  21  21  12  12  10  12
    7:  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055920036 kB

'who -r' did not return a run level

------------------------------------------------------------
10. Systemd service manager version: systemd 250 (250-6.el9_0)
```

(Continued on next page)

Platform Notes (Continued)

```
  Default Target  Status
  graphical       starting

------------------------------------------------------------
11. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
                   gdm getty@ insights-client-boot iscsi iscsi-onboot kdump libstoragemgmt lm_sensors
                   low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                   nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon
                   qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark sep5
                   smartd sshd sssd switcheroo-control sysstat systemd-network-generator tuned udisks2 upower
                   vgauthd virtqemud vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty containerd cpupower
                   cups-browsed dbus-daemon debug-shell dnsmasq docker dovecot fancontrol fcoe grafana-server
                   gssproxy httpd httpd@ ibacm iprdump iprinit iprupdate ipsec irqbalance iscsid iscsiuio
                   kpatch kvm_stat ledmon libvirt-guests libvirtd lldpad man-db-restart-cache-update named
                   named-chroot nfs-blkmap nfs-server nftables nmb numad nvmf-autoconnect pmfind pmie_farm
                   pmlogger_farm pmproxy postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm
                   rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd snmptrapd
                   spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
                   systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target
                   targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodedevd virtnwfilterd
                   virtproxyd virtsecretd virtstoraged vsftpd wpa_supplicant
  indirect         pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                   virtlockd virtlogd vsftpd@

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.22.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet
  intel_iommu=on,sm_on

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 24:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
```

(Continued on next page)

Platform Notes (Continued)

```
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/tzk/SPECcpu
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   819G   95G  724G  12% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Nettrix
    Product:        R620 G50
    Product Family: Rack
    Serial:         6101810603447811
```

(Continued on next page)

Platform Notes (Continued)

```
 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       American Megatrends International, LLC.
    BIOS Version:      NNH1041060
    BIOS Date:         09/18/2023
    BIOS Revision:     5.31
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```


(Continued on next page)

Compiler Version Notes (Continued)

```
==============================================================================================================
Fortran | 548.exchange2_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)

(Continued on next page)

Peak Optimization Flags (Continued)

500.perlbench_r (continued):
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.html
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Nettrix-Platform-Settings-V1.3-SPR-revA.xml
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-18 22:24:10-0500.
Report generated on 2024-01-16 17:16:45 by CPU2017 PS formatter v6716.
Originally published on 2024-01-16.