SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 2640

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2023
Hardware Availability: Oct-2023
Software Availability: Dec-2023

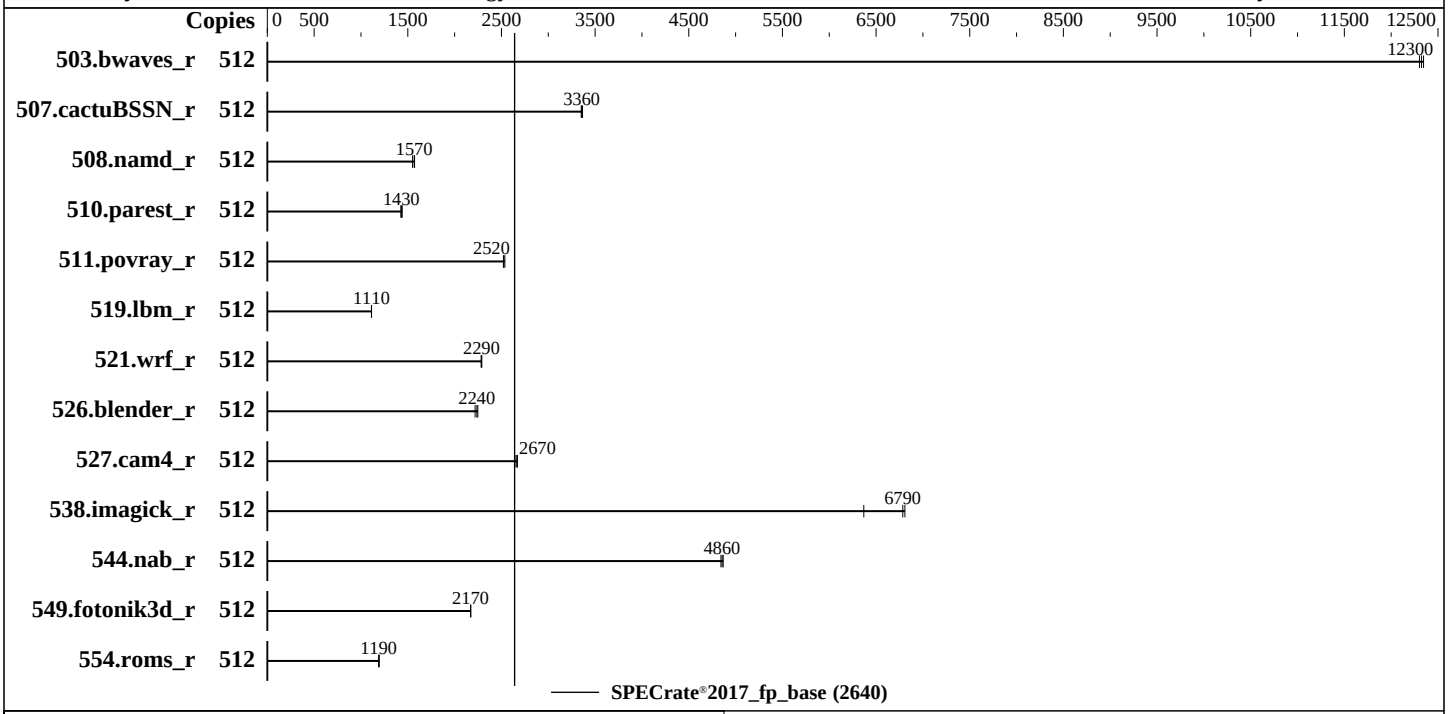

Hardware

CPU Name:	Intel Xeon Platinum 8454H
Max MHz:	3400
Nominal:	2100
Enabled:	256 cores, 8 chips, 2 threads/core
Orderable:	8 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	82.5 MB I+D on chip per chip
Other:	None
Memory:	4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.2 (Plow) Kernel 5.14.0-284.11.1.el9_2.x86_64
Compiler:	C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Lenovo BIOS Version EBE104O-1.10 released Dec-2023; tested with pre-release version EBE103M-1.10
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950 V3
(2.10 GHz, Intel Xeon Platinum 8454H)

SPECrate®2017_fp_base = 2640

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Dec-2023
Hardware Availability: Oct-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	512	417	12300	416	12300	**417**	**12300**							
507.cactuBSSN_r	512	**193**	**3360**	193	3350	193	3370							
508.namd_r	512	**310**	**1570**	314	1550	309	1570							
510.parest_r	512	**936**	**1430**	940	1430	930	1440							
511.povray_r	512	474	2520	471	2540	**473**	**2520**							
519.lbm_r	512	485	1110	485	1110	**485**	**1110**							
521.wrf_r	512	501	2290	502	2280	**501**	**2290**							
526.blender_r	512	**348**	**2240**	347	2250	351	2220							
527.cam4_r	512	**336**	**2670**	335	2670	337	2650							
538.imagick_r	512	200	6370	**188**	**6790**	187	6810							
544.nab_r	512	**177**	**4860**	178	4840	177	4870							
549.fotonik3d_r	512	919	2170	**919**	**2170**	919	2170							
554.roms_r	512	684	1190	681	1190	**683**	**1190**							

SPECrate®2017_fp_base = 2640

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance
SNC set to SNC4
LLC Prefetch set to Disabled
AMP Prefetch set to Enable

 Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Sun Dec 24 03:00:40 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-13.el9_2)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
   2023 x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    03:00:40 up 1 day,  5:43,  1 user,  load average: 0.12, 0.03, 0.01
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1      Fri21   16.00s  1.37s  0.02s /bin/bash ./speccpu_rock.sh
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 16512048
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 16512048
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 31
 login -- root
 -bash
 /bin/bash ./speccpu_rock.sh
 /bin/bash ./speccpu_rock.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=512 -c
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=256 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=512 --configfile
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=256 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
   rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.111/templogs/preenv.fprate.111.0.log --lognum 111.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8454H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b0004b1
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 32
    siblings        : 64
    8 physical ids (chips)
    512 processors (hardware threads)
    physical id 0: core ids 0-31
    physical id 1: core ids 0-31
    physical id 2: core ids 0-31
    physical id 3: core ids 0-31
```

(Continued on next page)

Platform Notes (Continued)

```
     physical id 4: core ids 0-31
     physical id 5: core ids 0-31
     physical id 6: core ids 0-31
     physical id 7: core ids 0-31
     physical id 0: apicids 0-63
     physical id 1: apicids 128-191
     physical id 2: apicids 256-319
     physical id 3: apicids 384-447
     physical id 4: apicids 512-575
     physical id 5: apicids 640-703
     physical id 6: apicids 768-831
     physical id 7: apicids 896-959
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          512
   On-line CPU(s) list:             0-511
   Vendor ID:                       GenuineIntel
   BIOS Vendor ID:                  Intel(R) Corporation
   Model name:                      Intel(R) Xeon(R) Platinum 8454H
   BIOS Model name:                 Intel(R) Xeon(R) Platinum 8454H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              2
   Core(s) per socket:              32
   Socket(s):                       8
   Stepping:                        8
   CPU max MHz:                     3400.0000
   CPU min MHz:                     800.0000
   BogoMIPS:                        4200.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                                    vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                    x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                    abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                    intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                                    flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                                    invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                    clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                    xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                    avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                                    ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                    tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                    enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                                    avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
   Virtualization:                  VT-x
   L1d cache:                       12 MiB (256 instances)
   L1i cache:                       8 MiB (256 instances)
   L2 cache:                        512 MiB (256 instances)
   L3 cache:                        660 MiB (8 instances)
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node(s):                    32
  NUMA node0 CPU(s):               0-7,256-263
  NUMA node1 CPU(s):               8-15,264-271
  NUMA node2 CPU(s):               16-23,272-279
  NUMA node3 CPU(s):               24-31,280-287
  NUMA node4 CPU(s):               32-39,288-295
  NUMA node5 CPU(s):               40-47,296-303
  NUMA node6 CPU(s):               48-55,304-311
  NUMA node7 CPU(s):               56-63,312-319
  NUMA node8 CPU(s):               64-71,320-327
  NUMA node9 CPU(s):               72-79,328-335
  NUMA node10 CPU(s):              80-87,336-343
  NUMA node11 CPU(s):              88-95,344-351
  NUMA node12 CPU(s):              96-103,352-359
  NUMA node13 CPU(s):              104-111,360-367
  NUMA node14 CPU(s):              112-119,368-375
  NUMA node15 CPU(s):              120-127,376-383
  NUMA node16 CPU(s):              128-135,384-391
  NUMA node17 CPU(s):              136-143,392-399
  NUMA node18 CPU(s):              144-151,400-407
  NUMA node19 CPU(s):              152-159,408-415
  NUMA node20 CPU(s):              160-167,416-423
  NUMA node21 CPU(s):              168-175,424-431
  NUMA node22 CPU(s):              176-183,432-439
  NUMA node23 CPU(s):              184-191,440-447
  NUMA node24 CPU(s):              192-199,448-455
  NUMA node25 CPU(s):              200-207,456-463
  NUMA node26 CPU(s):              208-215,464-471
  NUMA node27 CPU(s):              216-223,472-479
  NUMA node28 CPU(s):              224-231,480-487
  NUMA node29 CPU(s):              232-239,488-495
  NUMA node30 CPU(s):              240-247,496-503
  NUMA node31 CPU(s):              248-255,504-511
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                   sequence
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      12M   12 Data            1    64        1             64
     L1i       32K       8M    8 Instruction     1    64        1             64
     L2         2M     512M   16 Unified         2  2048        1             64
     L3      82.5M     660M   15 Unified         3 90112        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 32 nodes (0-31)
  node 0 cpus: 0-7,256-263
  node 0 size: 128485 MB
  node 0 free: 127556 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 1 cpus: 8-15,264-271
node 1 size: 129020 MB
node 1 free: 128189 MB
node 2 cpus: 16-23,272-279
node 2 size: 129020 MB
node 2 free: 128245 MB
node 3 cpus: 24-31,280-287
node 3 size: 129020 MB
node 3 free: 128244 MB
node 4 cpus: 32-39,288-295
node 4 size: 129020 MB
node 4 free: 128242 MB
node 5 cpus: 40-47,296-303
node 5 size: 129020 MB
node 5 free: 128251 MB
node 6 cpus: 48-55,304-311
node 6 size: 129020 MB
node 6 free: 128224 MB
node 7 cpus: 56-63,312-319
node 7 size: 129020 MB
node 7 free: 128294 MB
node 8 cpus: 64-71,320-327
node 8 size: 129020 MB
node 8 free: 128221 MB
node 9 cpus: 72-79,328-335
node 9 size: 129020 MB
node 9 free: 128288 MB
node 10 cpus: 80-87,336-343
node 10 size: 129020 MB
node 10 free: 128301 MB
node 11 cpus: 88-95,344-351
node 11 size: 129020 MB
node 11 free: 128283 MB
node 12 cpus: 96-103,352-359
node 12 size: 129020 MB
node 12 free: 128234 MB
node 13 cpus: 104-111,360-367
node 13 size: 129020 MB
node 13 free: 128284 MB
node 14 cpus: 112-119,368-375
node 14 size: 129020 MB
node 14 free: 128311 MB
node 15 cpus: 120-127,376-383
node 15 size: 129020 MB
node 15 free: 128301 MB
node 16 cpus: 128-135,384-391
node 16 size: 128981 MB
node 16 free: 128245 MB
node 17 cpus: 136-143,392-399
node 17 size: 129020 MB
node 17 free: 128295 MB
node 18 cpus: 144-151,400-407
node 18 size: 129020 MB
node 18 free: 128285 MB
node 19 cpus: 152-159,408-415
node 19 size: 129020 MB
node 19 free: 128291 MB
node 20 cpus: 160-167,416-423
node 20 size: 129020 MB
node 20 free: 128314 MB
```

(Continued on next page)

Platform Notes (Continued)

```
node 21 cpus: 168-175,424-431
node 21 size: 129020 MB
node 21 free: 128283 MB
node 22 cpus: 176-183,432-439
node 22 size: 129020 MB
node 22 free: 128289 MB
node 23 cpus: 184-191,440-447
node 23 size: 129020 MB
node 23 free: 128296 MB
node 24 cpus: 192-199,448-455
node 24 size: 129020 MB
node 24 free: 128182 MB
node 25 cpus: 200-207,456-463
node 25 size: 129020 MB
node 25 free: 128259 MB
node 26 cpus: 208-215,464-471
node 26 size: 129020 MB
node 26 free: 128273 MB
node 27 cpus: 216-223,472-479
node 27 size: 129020 MB
node 27 free: 127735 MB
node 28 cpus: 224-231,480-487
node 28 size: 129020 MB
node 28 free: 128259 MB
node 29 cpus: 232-239,488-495
node 29 size: 129020 MB
node 29 free: 128267 MB
node 30 cpus: 240-247,496-503
node 30 size: 129020 MB
node 30 free: 128284 MB
node 31 cpus: 248-255,504-511
node 31 size: 128996 MB
node 31 free: 128264 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
25  26  27  28  29  30  31
  0:  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
  1:  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
  2:  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
  3:  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
  21  21  21  31  31  31  31
  4:  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  5:  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  6:  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  7:  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  8:  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
  9:  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21  21  21  21  31  31  31  31  31
  31  31  31  21  21  21  21
 10:  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
 11:  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21  21  21  21  31  31  31  31  31
 31  31  31  21  21  21  21
```

(Continued on next page)

Platform Notes (Continued)

```
   12:  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31  31  31  31  21  21  21  21  21
   21  21  21  31  31  31  31
   13:  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31  31  31  31  21  21  21  21  21
   21  21  21  31  31  31  31
   14:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31  31  31  31  21  21  21  21  21
   21  21  21  31  31  31  31
   15:  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31  31  31  31  21  21  21  21  21
   21  21  21  31  31  31  31
   16:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10  12  12  12  21  21  21  21  21
   21  21  21  31  31  31  31
   17:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  10  12  12  21  21  21  21  21
   21  21  21  31  31  31  31
   18:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  12  10  12  21  21  21  21  21
   21  21  21  31  31  31  31
   19:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12  12  12  10  21  21  21  21  21
   21  21  21  31  31  31  31
   20:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  10  12  12  12  31
   31  31  31  21  21  21  21
   21:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  10  12  12  31
   31  31  31  21  21  21  21
   22:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  10  12  31
   31  31  31  21  21  21  21
   23:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  12  12  12  10  31
   31  31  31  21  21  21  21
   24:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  10
   12  12  12  21  21  21  21
   25:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
   10  12  12  21  21  21  21
   26:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
   12  10  12  21  21  21  21
   27:  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  12
   12  12  10  21  21  21  21
   28:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
   21  21  21  10  12  12  12
   29:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
   21  21  21  12  10  12  12
   30:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
   21  21  21  12  12  10  12
   31:  31  31  31  31  21  21  21  21  21  21  21  21  31  31  31  31  31  31  31  31  21  21  21  21  21
   21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       4227125248 kB

------------------------------------------------------------
10. who -r
  run-level 3 Dec 22 21:20

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-13.el9_2)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                  dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
                  mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark
```

(Continued on next page)

Platform Notes (Continued)

```
                  sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
  enabled-runtime systemd-remount-fs
  disabled        canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                  chrony-wait console-getty cpupower debug-shell dnf-system-upgrade kvm_stat
                  man-db-restart-cache-update nftables pesign rdisc rhcd rhsm rhsm-facts rpmdb-rebuild
                  selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
                  systemd-pstore systemd-sysext
  indirect        sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                  systemd-sysupdate-reboot

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd1,gpt2)/boot/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
  root=UUID=116409c2-57ac-4857-ace6-bb315b1769ff
  ro
  resume=UUID=075e4fda-52f2-4584-8323-c813820fb1bd

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
```

(Continued on next page)

Platform Notes (Continued)

```
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.2 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
  system-release Red Hat Enterprise Linux release 9.2 (Plow)

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sdc4      xfs   371G  236G  136G  64% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR950 V3
    Product Family: ThinkSystem
    Serial:         BLRSDV044

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    41x SK Hynix HMCG94AEBRA102N 64 GB 2 rank 4800
    14x SK Hynix HMCG94AEBRA109N 64 GB 2 rank 4800
    9x SK Hynix HMCG94AEBRA123N 64 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Lenovo
   BIOS Version:      EBE103M-1.10
   BIOS Date:         10/10/2023
   BIOS Revision:     1.10
   Firmware Revision: 1.10
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
C++, C          | 511.povray_r(base) 526.blender_r(base)
------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-23 14:00:40-0500.
Report generated on 2024-01-17 09:58:50 by CPU2017 PS formatter v6716.
Originally published on 2024-01-17.