SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8592+)

SPECrate®2017_int_base = 1060

SPECrate®2017_int_peak = 1100

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Feb-2024
Software Availability: Dec-2023

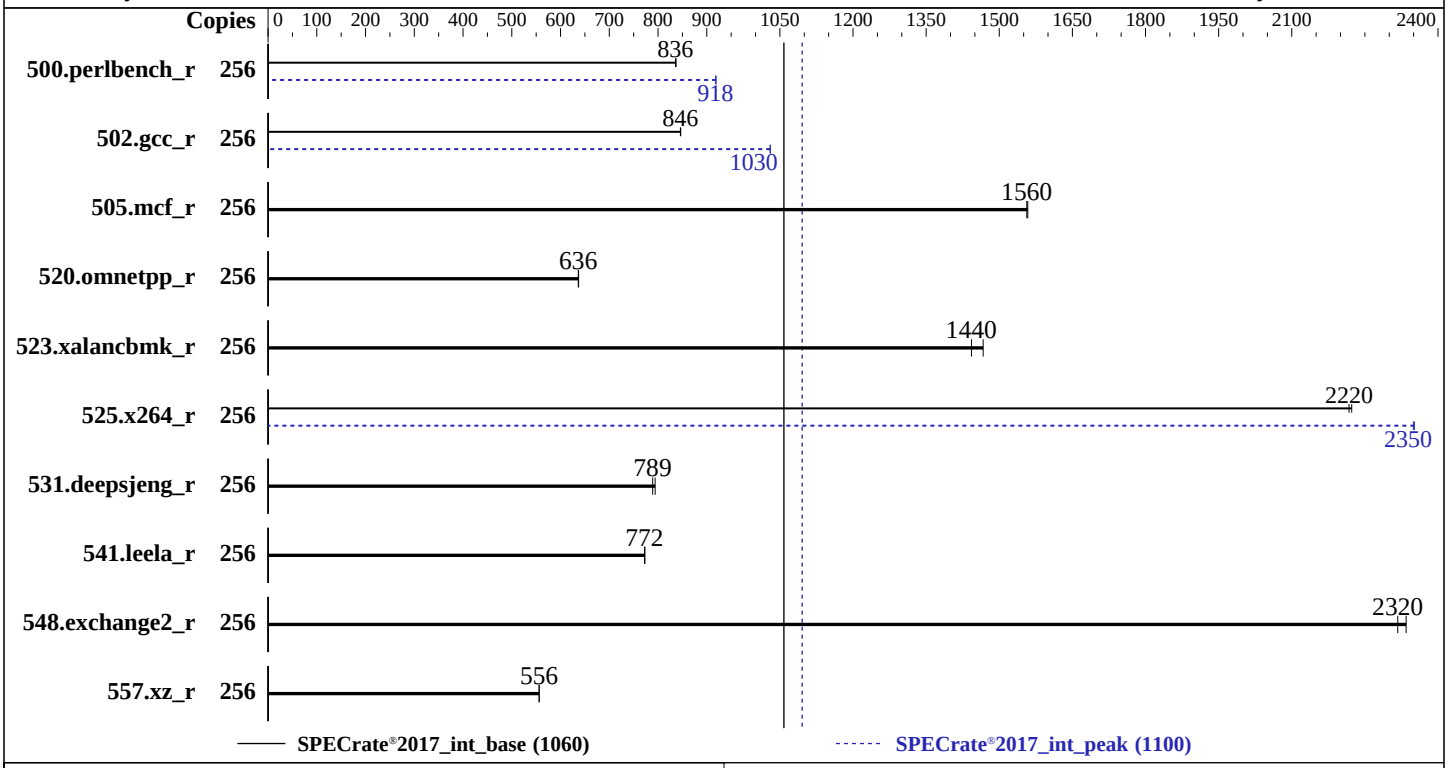

Hardware

CPU Name:	Intel Xeon Platinum 8592+
Max MHz:	3900
Nominal:	1900
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	320 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
Storage:	140 GB on tmpfs
Other:	Cooling: DLC

Software

OS:	SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.55.7-default
Compiler:	C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 2.0.0 released Nov-2023
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8592+)

SPECrate®2017_int_base = 1060

SPECrate®2017_int_peak = 1100

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	**488**	**836**	487	837			256	443	919	**444**	**918**		
502.gcc_r	256	**429**	**846**	428	847			256	**352**	**1030**	352	1030		
505.mcf_r	256	**266**	**1560**	265	1560			256	**266**	**1560**	265	1560		
520.omnetpp_r	256	**528**	**636**	527	637			256	**528**	**636**	527	637		
523.xalancbmk_r	256	184	1470	**187**	**1440**			256	184	1470	**187**	**1440**		
525.x264_r	256	**202**	**2220**	202	2220			256	191	2350	**191**	**2350**		
531.deepsjeng_r	256	**372**	**789**	369	794			256	**372**	**789**	369	794		
541.leela_r	256	**549**	**772**	548	773			256	**549**	**772**	548	773		
548.exchange2_r	256	**289**	**2320**	287	2330			256	**289**	**2320**	287	2330		
557.xz_r	256	**497**	**556**	497	556			256	**497**	**556**	497	556		

SPECrate®2017_int_base = 1060

SPECrate®2017_int_peak = 1100

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/mnt
     /ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

(Continued on next page)

General Notes (Continued)

```
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 140 GB ramdisk created with the cmd: "mount -t tmpfs -o size=140G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
                ADDDC Setting : Disabled
       DIMM Self Healing on
   Uncorrectable Memory Error : Disabled

     Virtualization Technology : Disabled
       DCU Streamer Prefetcher : Disabled
              Sub NUMA Cluster : 2-way Clustering
                  LLC Prefetch : Disabled
          Dead Line LLC Alloc : Disabled
               Optimizer Mode : Enabled

               System Profile : Custom
         CPU Power Management : Maximum Performance
                          C1E : Disabled
                      C States : Autonomous
          Memory Patrol Scrub : Disabled
     Energy Efficiency Policy : Performance
            PCI ASPM L1 Link
              Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Dec 21 18:07:07 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
```

(Continued on next page)

Platform Notes (Continued)

```
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150500.55.7-default #1 SMP PREEMPT_DYNAMIC Mon Jul 10 18:53:13 UTC 2023 (4204a3a)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   18:07:07 up  1:12,  2 users,  load average: 0.13, 0.03, 0.01
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     :        :                16:55   ?xdm?  31:36   0.00s gdm-session-worker [pam/gdm-autologin]
  root     :0       :0               16:55   ?xdm?  31:36   0.00s /usr/lib/gdm/gdm-x-session
  --register-session --run-script gnome

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4123794
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4123794
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 34
 /usr/lib/systemd/systemd --user
 /usr/lib/gnome-terminal-server
 bash
 /bin/bash ./DELL_rate.sh
 /bin/bash ./dell-run-main.sh rate
 /bin/bash ./dell-run-main.sh rate
 /bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
   --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1
 /bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
   --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=128 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all --define DL-BIOS-SNC=2
   --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
```

(Continued on next page)

Platform Notes (Continued)

```
    DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1 intrate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
    ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=128 --define physicalfirst
    --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --define
    DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
    DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1 --nopower
    --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
  specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3

------------------------------------------------------------
6. /proc/cpuinfo
     model name      : INTEL(R) XEON(R) PLATINUM 8592+
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 207
     stepping        : 2
     microcode       : 0x21000200
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
     cpu cores       : 64
     siblings        : 128
     2 physical ids (chips)
     256 processors (hardware threads)
     physical id 0: core ids 0-63
     physical id 1: core ids 0-63
     physical id 0: apicids 0-127
     physical id 1: apicids 128-255
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          256
   On-line CPU(s) list:             0-255
   Vendor ID:                       GenuineIntel
   Model name:                      INTEL(R) XEON(R) PLATINUM 8592+
   CPU family:                      6
   Model:                           207
   Thread(s) per core:              2
   Core(s) per socket:              64
   Socket(s):                       2
   Stepping:                        2
   BogoMIPS:                        3800.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                    vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                    bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
```

(Continued on next page)

Platform Notes (Continued)

```
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  Virtualization:       VT-x
  L1d cache:            6 MiB (128 instances)
  L1i cache:            4 MiB (128 instances)
  L2 cache:             256 MiB (128 instances)
  L3 cache:             640 MiB (2 instances)
  NUMA node(s):         4
  NUMA node0 CPU(s):    0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,10
                        0,104,108,112,116,120,124,128,132,136,140,144,148,152,156,160,164,168,172,
                        176,180,184,188,192,196,200,204,208,212,216,220,224,228,232,236,240,244,24
                        8,252
  NUMA node1 CPU(s):    2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,1
                        02,106,110,114,118,122,126,130,134,138,142,146,150,154,158,162,166,170,174
                        ,178,182,186,190,194,198,202,206,210,214,218,222,226,230,234,238,242,246,2
                        50,254
  NUMA node2 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,10
                        1,105,109,113,117,121,125,129,133,137,141,145,149,153,157,161,165,169,173,
                        177,181,185,189,193,197,201,205,209,213,217,221,225,229,233,237,241,245,24
                        9,253
  NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,1
                        03,107,111,115,119,123,127,131,135,139,143,147,151,155,159,163,167,171,175
                        ,179,183,187,191,195,199,203,207,211,215,219,223,227,231,235,239,243,247,2
                        51,255
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                   sequence
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1     64        1             64
     L1i       32K       4M    8 Instruction     1     64        1             64
     L2         2M     256M   16 Unified         2   2048        1             64
     L3       320M     640M   20 Unified         3 262144        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus:
  0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100,104,108,112,116,120,124,128,132
  ,136,140,144,148,152,156,160,164,168,172,176,180,184,188,192,196,200,204,208,212,216,220,224,228,232,236,24
  0,244,248,252
  node 0 size: 257411 MB
  node 0 free: 256192 MB
  node 1 cpus:
```

(Continued on next page)

Platform Notes (Continued)

```
  2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110,114,118,122,126,130,13
  4,138,142,146,150,154,158,162,166,170,174,178,182,186,190,194,198,202,206,210,214,218,222,226,230,234,238,2
  42,246,250,254
  node 1 size: 257985 MB
  node 1 free: 256875 MB
  node 2 cpus:
  1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109,113,117,121,125,129,133
  ,137,141,145,149,153,157,161,165,169,173,177,181,185,189,193,197,201,205,209,213,217,221,225,229,233,237,24
  1,245,249,253
  node 2 size: 258031 MB
  node 2 free: 248736 MB
  node 3 cpus:
  3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111,115,119,123,127,131,13
  5,139,143,147,151,155,159,163,167,171,175,179,183,187,191,195,199,203,207,211,215,219,223,227,231,235,239,2
  43,247,251,255
  node 3 size: 257549 MB
  node 3 free: 256840 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055722144 kB

------------------------------------------------------------
10. who -r
  run-level 5 Dec 21 16:55

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
                   display-manager getty@ irqbalance issue-generator kbdsettings kdump kdump-early klog
                   lvm2-monitor nscd nvmefc-boot-connections postfix purge-kernels rollback rsyslog smartd
                   sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl
                   ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebtables
                   exchange-bmc-os-info firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd
                   issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
                   nvmf-autoconnect ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
                   smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
                   systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
                   update-system-flatpaks upower vncserver@
  indirect         wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.55.7-default
  root=UUID=19cd6098-1c22-4cf8-9664-b7e169fa6321
  splash=silent
```

(Continued on next page)

Platform Notes (Continued)

```
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=406M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP5

------------------------------------------------------------
19. Disk information
```

(Continued on next page)

Platform Notes (Continued)

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  140G  4.1G  136G   3% /mnt/ramdisk

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge MX760c
    Product Family: PowerEdge
    Serial:         259005S

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x 002C0632002C MTC40F2046S1RC56BG1 64 GB 2 rank 5600


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      2.0.0
   BIOS Date:         11/23/2023
   BIOS Revision:     2.0
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `-w -std=c11 -m64 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1) `-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fno-strict-overflow -L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin -lqkmalloc`

502.gcc_r: `-m32 -L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin -std=gnu89 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1) `-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib -ljemalloc`

505.mcf_r: `basepeak = yes`

525.x264_r: `-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fno-alias -L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin -lqkmalloc`

557.xz_r: `basepeak = yes`

C++ benchmarks:

520.omnetpp_r: `basepeak = yes`

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-21 05:07:07-0500.
Report generated on 2024-01-30 23:19:28 by CPU2017 PS formatter v6716.
Originally published on 2024-01-30.