



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

**SPECSpeed®2017\_int\_base = 14.5**

**SPECSpeed®2017\_int\_peak = 14.7**

CPU2017 License: 3


Test Date: Jan-2024

Test Sponsor: HPE

Hardware Availability: Feb-2024

Tested by: HPE

Software Availability: Dec-2023

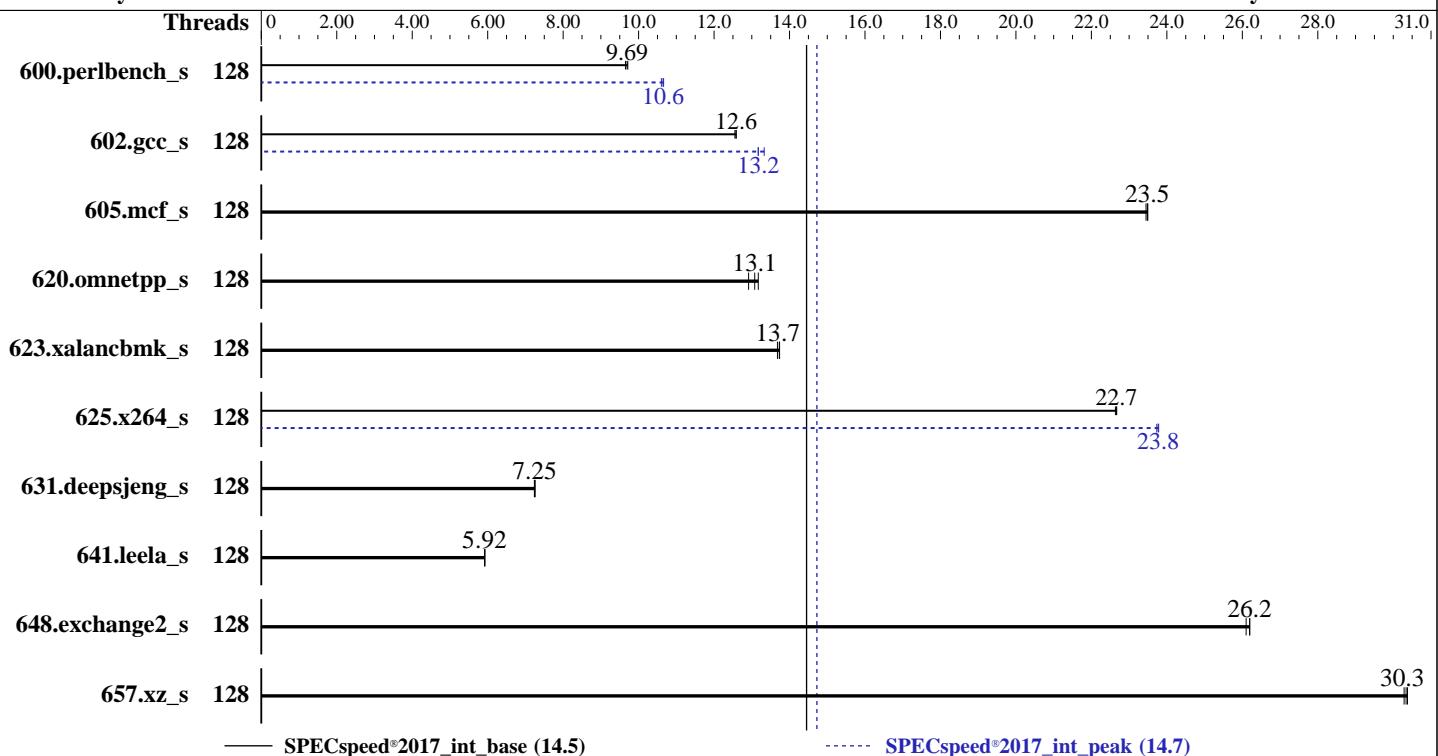

## Hardware

CPU Name: Intel Xeon Platinum 8592+  
 Max MHz: 3900  
 Nominal: 1900  
 Enabled: 128 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 320 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)  
 Storage: 1 x 1.6 TB NVMe SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Compiler: Kernel 5.14.21-150500.53-default  
 C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: HPE BIOS Version v2.12 12/19/2023 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

**SPECspeed®2017\_int\_base = 14.5**

**SPECspeed®2017\_int\_peak = 14.7**

CPU2017 License: 3

Test Date: Jan-2024

Test Sponsor: HPE

Hardware Availability: Feb-2024

Tested by: HPE

Software Availability: Dec-2023

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	128	184	9.65	183	9.71	<b>183</b>	<b>9.69</b>	128	<b>167</b>	<b>10.6</b>	166	10.7	167	10.6		
602.gcc_s	128	317	12.6	316	12.6	<b>316</b>	<b>12.6</b>	128	<b>302</b>	<b>13.2</b>	302	13.2	299	13.3		
605.mcf_s	128	201	23.4	<b>201</b>	<b>23.5</b>	201	23.5	128	201	23.4	<b>201</b>	<b>23.5</b>	201	23.5		
620.omnetpp_s	128	126	12.9	124	13.2	<b>125</b>	<b>13.1</b>	128	126	12.9	124	13.2	<b>125</b>	<b>13.1</b>		
623.xalancbmk_s	128	104	13.7	103	13.7	<b>103</b>	<b>13.7</b>	128	104	13.7	103	13.7	<b>103</b>	<b>13.7</b>		
625.x264_s	128	77.9	22.6	77.8	22.7	<b>77.8</b>	<b>22.7</b>	128	<b>74.2</b>	<b>23.8</b>	74.2	23.8	74.3	23.7		
631.deepsjeng_s	128	197	7.26	<b>198</b>	<b>7.25</b>	198	7.24	128	197	7.26	<b>198</b>	<b>7.25</b>	198	7.24		
641.leela_s	128	288	5.92	288	5.93	<b>288</b>	<b>5.92</b>	128	288	5.92	288	5.93	<b>288</b>	<b>5.92</b>		
648.exchange2_s	128	112	26.2	113	26.1	<b>112</b>	<b>26.2</b>	128	112	26.2	113	26.1	<b>112</b>	<b>26.2</b>		
657.xz_s	128	<b>204</b>	<b>30.3</b>	204	30.3	204	30.4	128	<b>204</b>	<b>30.3</b>	204	30.3	204	30.4		
<b>SPECspeed®2017_int_base = 14.5</b>																
<b>SPECspeed®2017_int_peak = 14.7</b>																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_int\_base = 14.5

SPECspeed®2017\_int\_peak = 14.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x21000200 for the Intel Xeon Platinum 8592+ processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute

Thermal Configuration set to Maximum Cooling

Intel Hyper-Threading set to Disabled

Memory Patrol Scrubbing set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Dead Block Predictor set to Enabled

Sub-NUMA Clustering set to Enable SNC2(2-clusters)

Workload Profile set to Custom

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Thu Jan 4 23:38:35 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

- 1. uname -a
  - 2. w
  - 3. Username
  - 4. ulimit -a
  - 5. sysinfo process ancestry
  - 6. /proc/cpuinfo
  - 7. lscpu
  - 8. numactl --hardware
  - 9. /proc/meminfo
  - 10. who -r
  - 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  - 12. Services, from systemctl list-unit-files
  - 13. Linux kernel boot-time arguments, from /proc/cmdline
  - 14. cpupower frequency-info
  - 15. tuned-adm active
  - 16. sysctl
  - 17. /sys/kernel/mm/transparent\_hugepage
  - 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  - 19. OS release
  - 20. Disk information
  - 21. /sys/devices/virtual/dmi/id
  - 22. dmidecode
  - 23. BIOS
- 

- 1. uname -a
- Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_int\_base = 14.5

SPECspeed®2017\_int\_peak = 14.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
23:38:35 up 3 min, 2 users, load average: 0.05, 0.09, 0.04  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 23:36 1:18 0.00s 0.00s -bash  
root pts/0 172.17.1.107 23:37 9.00s 0.77s 0.00s -bash

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 2062644  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 2062644  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 29  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root@pts/0  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags -c  
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=128 --tune base,peak -o all --define  
intspeedaffinity --define drop\_caches intspeed  
runcpu --nobuild --action validate --define default-platform-flags --configfile  
ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=128 --tune base,peak --output\_format all  
--define intspeedaffinity --define drop\_caches --nopower --runmode speed --tune base:peak --size refspeed  
intspeed --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.005/templogs/preenv.intspeed.005.0.log  
--lognum 005.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/cpu2017

6. /proc/cpuinfo  
model name : INTEL(R) XEON(R) PLATINUM 8592+  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 207  
stepping : 2  
microcode : 0x21000200  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs eibrp\_brs  
cpu cores : 64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_int\_base = 14.5

SPECspeed®2017\_int\_peak = 14.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
siblings      : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246,248,250,252,254
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 128
On-line CPU(s) list:    0-127
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) PLATINUM 8592+
CPU family:             6
Model:                  207
Thread(s) per core:     1
Core(s) per socket:     64
Socket(s):              2
Stepping:               2
BogoMIPS:                3800.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmon pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtrp pdcm pcid dca sse4_1
                        sse4_2 x2apic movebe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
                        invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect
                        cldemote movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:          VT-x
L1d cache:                6 MiB (128 instances)
L1i cache:                4 MiB (128 instances)
L2 cache:                256 MiB (128 instances)
L3 cache:                640 MiB (2 instances)
NUMA node(s):             4
NUMA node0 CPU(s):        0-15,64-79
NUMA node1 CPU(s):        16-31,80-95
NUMA node2 CPU(s):        32-47,96-111
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_int\_base = 14.5

SPECspeed®2017\_int\_peak = 14.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
NUMA node3 CPU(s):          48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability Llft:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds:        Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

-----

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-15,64-79

node 0 size: 128709 MB

node 0 free: 127747 MB

node 1 cpus: 16-31,80-95

node 1 size: 129015 MB

node 1 free: 128541 MB

node 2 cpus: 32-47,96-111

node 2 size: 129015 MB

node 2 free: 128319 MB

node 3 cpus: 48-63,112-127

node 3 size: 128942 MB

node 3 free: 128490 MB

node distances:

node 0 1 2 3

0: 10 20 30 30

1: 20 10 30 30

2: 30 30 10 20

3: 30 30 20 10

-----

9. /proc/meminfo

MemTotal: 528060468 kB

-----

10. who -r

run-level 3 Jan 4 23:36

-----

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target Status

multi-user running

-----

12. Services, from systemctl list-unit-files

STATE UNIT FILES

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_int\_base = 14.5

SPECspeed®2017\_int\_peak = 14.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
enabled      apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor
             nvmefc-boot-connections postfix purge-kernels rollback sshd systemd-pstore wicked
             wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime   systemd-remount-fs
disabled       blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
               grub2-once haveged haveged-switch-root issue-add-ssh-keys kexec-load nvmf-autoconnect
               rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator
               systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect        wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=8cfcea0f2-51cb-41d3-956f-66e764c9dda6
splash=silent
resume=/dev/disk/by-uuid/f2fdb83d-34e7-4b60-be82-95ecb061302c
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

-----
15. tuned-adm active
Current active profile: throughput-performance

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvise [madvise] never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 14.5

SPECspeed®2017\_int\_peak = 14.7

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag 1
    max_ptes_none 511
    max_ptes_shared 256
    max_ptes_swap 64
    pages_to_scan 4096
    scan_sleep_millisecs 10000
```

```
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP5
```

```
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3  xfs   946G  272G  675G  29% /home
```

```
21. /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL380a Gen11
Product Family:  ProLiant
Serial:          CNX22602MZ
```

```
22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 16x Hynix HMCG88AGBRA193N 32 GB 2 rank 5600
```

```
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      HPE
BIOS Version:     2.12
BIOS Date:        12/19/2023
BIOS Revision:    2.12
Firmware Revision: 1.56
```

## Compiler Version Notes

```
=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
  | 657.xz_s(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

**SPECspeed®2017\_int\_base = 14.5**

**SPECspeed®2017\_int\_peak = 14.7**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====  
Fortran | 648.exchange2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-floop -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017\_int\_base = 14.5

SPECspeed®2017\_int\_peak = 14.7

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fopenmp -DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(1.90 GHz, Intel Xeon Platinum 8592+)

SPECspeed®2017\_int\_base = 14.5

SPECspeed®2017\_int\_peak = 14.7

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

```
602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes
```

```
623.xalancbmk_s: basepeak = yes
```

```
631.deepsjeng_s: basepeak = yes
```

```
641.leela_s: basepeak = yes
```

Fortran benchmarks:

```
648.exchange2_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-04 13:08:35-0500.

Report generated on 2024-01-30 23:27:24 by CPU2017 PDF formatter v6716.

Originally published on 2024-01-30.