SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

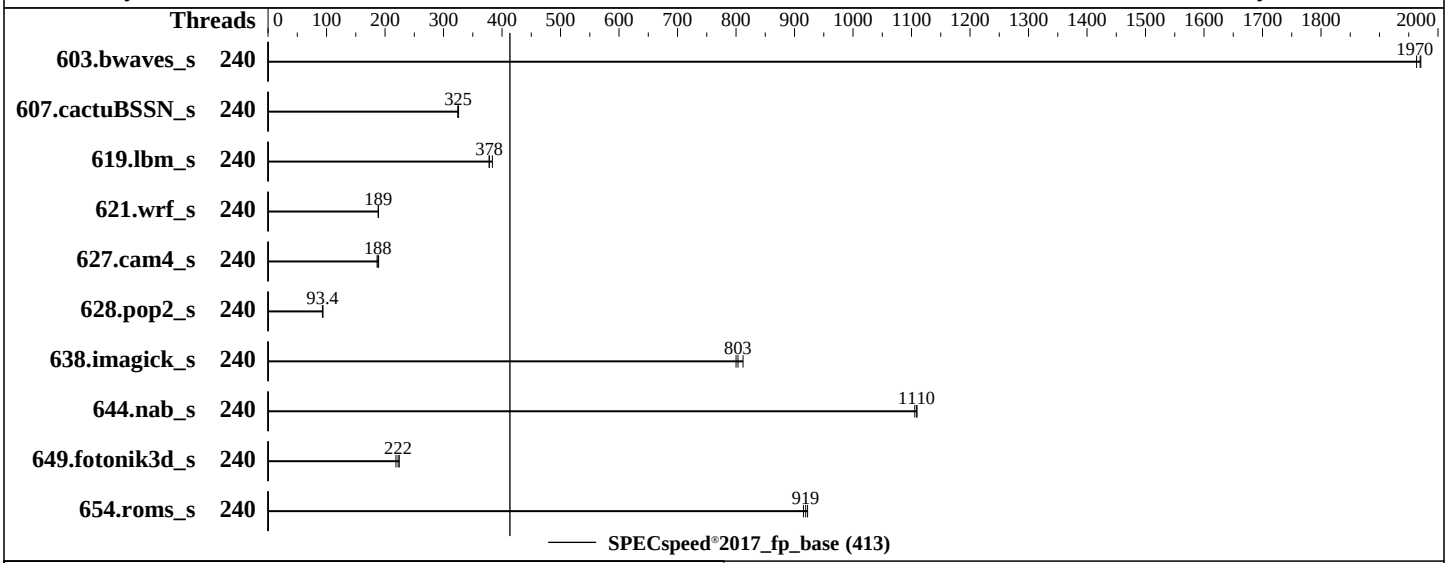

Hardware

CPU Name:	Intel Xeon Platinum 8490H
Max MHz:	3500
Nominal:	1900
Enabled:	960 cores, 16 chips
Orderable:	4, 8, 16 chip(s)
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	112.5 MB I+D on chip per chip
Other:	None
Memory:	8 TB (128 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 6.4 TB NVMe SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux 8.8 (Ootpa) Kernel 4.18.0-477.10.1.el8_8.x86_64
Compiler:	C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	HPE Firmware Bundle Version 1.10.342 released Dec-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1 HPE Foundation Software 2.5.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

HPE Compute Scale-up Server 3200
(1.90 GHz, Intel Xeon Platinum 8490H)

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Jan-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	240	**30.0**	**1970**	30.0	1960	29.9	1970							
607.cactuBSSN_s	240	51.4	324	**51.3**	**325**	51.2	326							
619.lbm_s	240	**13.8**	**378**	13.9	378	13.7	383							
621.wrf_s	240	70.1	189	70.2	188	**70.1**	**189**							
627.cam4_s	240	47.5	186	46.9	189	**47.2**	**188**							
628.pop2_s	240	**127**	**93.4**	128	92.9	127	93.8							
638.imagick_s	240	**18.0**	**803**	18.0	800	17.8	812							
644.nab_s	240	15.8	1110	15.8	1110	**15.8**	**1110**							
649.fotonik3d_s	240	40.6	224	**41.0**	**222**	41.7	219							
654.roms_s	240	17.2	915	17.1	922	**17.1**	**919**							

SPECspeed®2017_fp_base = 413

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
The system ROM used for this result contains Intel microcode version 0x2b0004d0 for
the Intel Xeon Platinum 8490H processor.
```

(Continued on next page)

Platform Notes (Continued)

```
BIOS Configuration:
 Workload Profile set to Custom
 Power Regulator set to Static High Performance Mode
 Energy Efficient Turbo set to Disabled
 Energy/Performance Bias set to Maximum Performance
 Intel Hyper-Threading set to Disabled
 Adjacent Sector Prefetch set to Disabled
 LLC Prefetch set to Enabled
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Enhanced Processor Performance Profile set to Aggressive
 Memory Patrol Scrubbing set to Disabled
 Advanced Memory Protection set to Advanced ECC Support
 SR-IOV set to Disabled
 Intel Virtualization Technology (Intel VT, VT-x) set to Disabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on sph-201 Sat Jan 20 08:39:42 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 239 (239-74.el8_8)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux sph-201 4.18.0-477.10.1.el8_8.x86_64 #1 SMP Wed Apr 5 13:35:01 EDT 2023 x86_64 x86_64 x86_64
   GNU/Linux

 ------------------------------------------------------------
 2. w
    08:39:42 up 2 min,  1 user,  load average: 6.37, 6.91, 2.99
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   test     ttyS0    -                08:38    5.00s  1.02s  0.01s login -- test
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       test

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) 0
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 32508846
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 40000
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 32508846
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 17
 login -- test
 -bash
 sudo su
 su
 bash
 bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=960 --threads=240 --tune base -o all
   --define drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=960 --threads 240 --tune base
   --output_format all --define drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed
   --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.006/templogs/preenv.fpspeed.006.0.log --lognum 006.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8490H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b0004d0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 60
    siblings        : 60
    16 physical ids (chips)
    960 processors (hardware threads)
    physical id 0: core ids 0-59
    physical id 1: core ids 0-59
```

(Continued on next page)

Platform Notes (Continued)

```
physical id 2: core ids 0-59
physical id 3: core ids 0-59
physical id 4: core ids 0-59
physical id 5: core ids 0-59
physical id 6: core ids 0-59
physical id 7: core ids 0-59
physical id 8: core ids 0-59
physical id 9: core ids 0-59
physical id 10: core ids 0-59
physical id 11: core ids 0-59
physical id 12: core ids 0-59
physical id 13: core ids 0-59
physical id 14: core ids 0-59
physical id 15: core ids 0-59
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238,240,242,244,246
physical id 2: apicids
256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,3
08,310,312,314,316,318,320,322,324,326,328,330,332,334,336,338,340,342,344,346,348,350,352,354,356,358,36
0,362,364,366,368,370,372,374
physical id 3: apicids
384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418,420,422,424,426,428,430,432,434,4
36,438,440,442,444,446,448,450,452,454,456,458,460,462,464,466,468,470,472,474,476,478,480,482,484,486,48
8,490,492,494,496,498,500,502
physical id 4: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
6,618,620,622,624,626,628,630
physical id 5: apicids
640,642,644,646,648,650,652,654,656,658,660,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,6
92,694,696,698,700,702,704,706,708,710,712,714,716,718,720,722,724,726,728,730,732,734,736,738,740,742,74
4,746,748,750,752,754,756,758
physical id 6: apicids
768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,808,810,812,814,816,818,8
20,822,824,826,828,830,832,834,836,838,840,842,844,846,848,850,852,854,856,858,860,862,864,866,868,870,87
2,874,876,878,880,882,884,886
physical id 7: apicids
896,898,900,902,904,906,908,910,912,914,916,918,920,922,924,926,928,930,932,934,936,938,940,942,944,946,9
48,950,952,954,956,958,960,962,964,966,968,970,972,974,976,978,980,982,984,986,988,990,992,994,996,998,10
00,1002,1004,1006,1008,1010,1012,1014
physical id 8: apicids
1024,1026,1028,1030,1032,1034,1036,1038,1040,1042,1044,1046,1048,1050,1052,1054,1056,1058,1060,1062,1064,
1066,1068,1070,1072,1074,1076,1078,1080,1082,1084,1086,1088,1090,1092,1094,1096,1098,1100,1102,1104,1106,
1108,1110,1112,1114,1116,1118,1120,1122,1124,1126,1128,1130,1132,1134,1136,1138,1140,1142
physical id 9: apicids
1152,1154,1156,1158,1160,1162,1164,1166,1168,1170,1172,1174,1176,1178,1180,1182,1184,1186,1188,1190,1192,
1194,1196,1198,1200,1202,1204,1206,1208,1210,1212,1214,1216,1218,1220,1222,1224,1226,1228,1230,1232,1234,
1236,1238,1240,1242,1244,1246,1248,1250,1252,1254,1256,1258,1260,1262,1264,1266,1268,1270
physical id 10: apicids
1280,1282,1284,1286,1288,1290,1292,1294,1296,1298,1300,1302,1304,1306,1308,1310,1312,1314,1316,1318,1320,
1322,1324,1326,1328,1330,1332,1334,1336,1338,1340,1342,1344,1346,1348,1350,1352,1354,1356,1358,1360,1362,
1364,1366,1368,1370,1372,1374,1376,1378,1380,1382,1384,1386,1388,1390,1392,1394,1396,1398
physical id 11: apicids
1408,1410,1412,1414,1416,1418,1420,1422,1424,1426,1428,1430,1432,1434,1436,1438,1440,1442,1444,1446,1448,
1450,1452,1454,1456,1458,1460,1462,1464,1466,1468,1470,1472,1474,1476,1478,1480,1482,1484,1486,1488,1490,
```

(Continued on next page)

Platform Notes (Continued)

```
     1492,1494,1496,1498,1500,1502,1504,1506,1508,1510,1512,1514,1516,1518,1520,1522,1524,1526
     physical id 12: apicids
     1536,1538,1540,1542,1544,1546,1548,1550,1552,1554,1556,1558,1560,1562,1564,1566,1568,1570,1572,1574,1576,
     1578,1580,1582,1584,1586,1588,1590,1592,1594,1596,1598,1600,1602,1604,1606,1608,1610,1612,1614,1616,1618,
     1620,1622,1624,1626,1628,1630,1632,1634,1636,1638,1640,1642,1644,1646,1648,1650,1652,1654
     physical id 13: apicids
     1664,1666,1668,1670,1672,1674,1676,1678,1680,1682,1684,1686,1688,1690,1692,1694,1696,1698,1700,1702,1704,
     1706,1708,1710,1712,1714,1716,1718,1720,1722,1724,1726,1728,1730,1732,1734,1736,1738,1740,1742,1744,1746,
     1748,1750,1752,1754,1756,1758,1760,1762,1764,1766,1768,1770,1772,1774,1776,1778,1780,1782
     physical id 14: apicids
     1792,1794,1796,1798,1800,1802,1804,1806,1808,1810,1812,1814,1816,1818,1820,1822,1824,1826,1828,1830,1832,
     1834,1836,1838,1840,1842,1844,1846,1848,1850,1852,1854,1856,1858,1860,1862,1864,1866,1868,1870,1872,1874,
     1876,1878,1880,1882,1884,1886,1888,1890,1892,1894,1896,1898,1900,1902,1904,1906,1908,1910
     physical id 15: apicids
     1920,1922,1924,1926,1928,1930,1932,1934,1936,1938,1940,1942,1944,1946,1948,1950,1952,1954,1956,1958,1960,
     1962,1964,1966,1968,1970,1972,1974,1976,1978,1980,1982,1984,1986,1988,1990,1992,1994,1996,1998,2000,2002,
     2004,2006,2008,2010,2012,2014,2016,2018,2020,2022,2024,2026,2028,2030,2032,2034,2036,2038
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.32.1:
   Architecture:        x86_64
   CPU op-mode(s):      32-bit, 64-bit
   Byte Order:          Little Endian
   CPU(s):              960
   On-line CPU(s) list: 0-959
   Thread(s) per core:  1
   Core(s) per socket:  60
   Socket(s):           16
   NUMA node(s):        16
   Vendor ID:           GenuineIntel
   BIOS Vendor ID:      Intel(R) Corporation
   CPU family:          6
   Model:               143
   Model name:          Intel(R) Xeon(R) Platinum 8490H
   BIOS Model name:     Intel(R) Xeon(R) Platinum 8490H
   Stepping:            8
   CPU MHz:             3500.000
   CPU max MHz:         3500.0000
   CPU min MHz:         800.0000
   BogoMIPS:            3800.00
   L1d cache:           48K
   L1i cache:           32K
   L2 cache:            2048K
   L3 cache:            115200K
   NUMA node0 CPU(s):   0-59
   NUMA node1 CPU(s):   60-119
   NUMA node2 CPU(s):   120-179
   NUMA node3 CPU(s):   180-239
   NUMA node4 CPU(s):   240-299
   NUMA node5 CPU(s):   300-359
   NUMA node6 CPU(s):   360-419
   NUMA node7 CPU(s):   420-479
   NUMA node8 CPU(s):   480-539
   NUMA node9 CPU(s):   540-599
   NUMA node10 CPU(s):  600-659
   NUMA node11 CPU(s):  660-719
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node12 CPU(s):  720-779
  NUMA node13 CPU(s):  780-839
  NUMA node14 CPU(s):  840-899
  NUMA node15 CPU(s):  900-959
  Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                       acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc
                       arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
                       pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
                       sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                       abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin
                       cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                       erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
                       intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                       cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni avx512_bf16
                       wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni
                       vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                       bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                       pconfig arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0-59
  node 0 size: 507197 MB
  node 0 free: 506401 MB
  node 1 cpus: 60-119
  node 1 size: 508078 MB
  node 1 free: 507522 MB
  node 2 cpus: 120-179
  node 2 size: 508078 MB
  node 2 free: 507159 MB
  node 3 cpus: 180-239
  node 3 size: 508078 MB
  node 3 free: 507659 MB
  node 4 cpus: 240-299
  node 4 size: 508078 MB
  node 4 free: 507652 MB
  node 5 cpus: 300-359
  node 5 size: 508078 MB
  node 5 free: 507615 MB
  node 6 cpus: 360-419
  node 6 size: 508078 MB
  node 6 free: 507657 MB
  node 7 cpus: 420-479
  node 7 size: 508034 MB
  node 7 free: 507517 MB
  node 8 cpus: 480-539
  node 8 size: 508078 MB
  node 8 free: 507115 MB
  node 9 cpus: 540-599
  node 9 size: 508078 MB
  node 9 free: 507223 MB
  node 10 cpus: 600-659
  node 10 size: 508078 MB
  node 10 free: 507448 MB
  node 11 cpus: 660-719
  node 11 size: 508078 MB
  node 11 free: 507527 MB
  node 12 cpus: 720-779
```

(Continued on next page)

Platform Notes (Continued)

```
  node 12 size: 508078 MB
  node 12 free: 507750 MB
  node 13 cpus: 780-839
  node 13 size: 508078 MB
  node 13 free: 507614 MB
  node 14 cpus: 840-899
  node 14 size: 508078 MB
  node 14 free: 507748 MB
  node 15 cpus: 900-959
  node 15 size: 507013 MB
  node 15 free: 506677 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
    0:  10  16  16  18  40  40  40  40  40  40  40  40  40  40  40  40
    1:  16  10  18  16  40  40  40  40  40  40  40  40  40  40  40  40
    2:  16  18  10  16  40  40  40  40  40  40  40  40  40  40  40  40
    3:  18  16  16  10  40  40  40  40  40  40  40  40  40  40  40  40
    4:  40  40  40  40  10  16  16  18  40  40  40  40  40  40  40  40
    5:  40  40  40  40  16  10  18  16  40  40  40  40  40  40  40  40
    6:  40  40  40  40  16  18  10  16  40  40  40  40  40  40  40  40
    7:  40  40  40  40  18  16  16  10  40  40  40  40  40  40  40  40
    8:  40  40  40  40  40  40  40  40  10  16  16  18  40  40  40  40
    9:  40  40  40  40  40  40  40  40  16  10  18  16  40  40  40  40
   10:  40  40  40  40  40  40  40  40  16  18  10  16  40  40  40  40
   11:  40  40  40  40  40  40  40  40  18  16  16  10  40  40  40  40
   12:  40  40  40  40  40  40  40  40  40  40  40  40  10  16  16  18
   13:  40  40  40  40  40  40  40  40  40  40  40  40  16  10  18  16
   14:  40  40  40  40  40  40  40  40  40  40  40  40  16  18  10  16
   15:  40  40  40  40  40  40  40  40  40  40  40  40  18  16  16  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       8322323468 kB

------------------------------------------------------------
10. who -r
  run-level 3 Jan 20 08:38

------------------------------------------------------------
11. Systemd service manager version: systemd 239 (239-74.el8_8)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE     UNIT FILES
  enabled   ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
            abrt-journal-core abrt-oops abrt-vmcore abrt-xorg abrtd accounts-daemon atd auditd autovt@
            avahi-daemon chronyd cpuset_cpunodemap cpuset_memory_spread crond dcd dcdchkgracefulshutdown
            dcdshutdown display-manager gdm getty@ hpe-auto-config hpe_irqbalance import-state
            insights-client-boot iscsi iscsi-onboot kdump ksm ksmtuned libstoragemgmt libvirtd lm_sensors
            loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
            nvmefc-boot-connections ostree-remount pmcd pmie pmlogger qemu-guest-agent rpcbind rsyslog
            rtkit-daemon selinux-autorelabel-mark smartd sshd sssd syslog sysstat timedatex tuned udisks2 vdo
            vgauthd vmtoolsd vsftpd
  disabled  abrt-ccpp abrt-pstoreoops arp-ethers autofs blk-availability bluetooth brltty
            canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot cgdcbxd
            chrony-wait cni-dhcp console-getty cpupower cups cups-browsed debug-shell dnf-system-upgrade
            dnsmasq dovecot ebtables fancontrol fcoe firewalld grafana-server gssproxy httpd httpd@ ibacm
            iprdump iprinit iprupdate ipsec irqbalance iscsid iscsiuio kpatch kvm_stat ledmon libvirt-guests
```

(Continued on next page)

Platform Notes (Continued)

```
             lldpad man-db-restart-cache-update named named-chroot ndctl-monitor netcf-transaction nfs-blkmap
             nfs-convert nfs-server nftables nmb numad nvmf-autoconnect oddjobd pmfind pmie_farm pmlogger_farm
             pmproxy podman podman-auto-update podman-clean-transient podman-kube@ podman-restart postfix
             powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rrdcached saslauthd sendmail sm-client smb snmpd
             snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
             switcheroo-control systemd-nspawn@ systemd-pstore systemd-resolved target targetclid tcsd
             tog-pegasus trace-cmd upower virtinterfaced virtnetworkd virtnodedevd virtnwfilterd virtproxyd
             virtqemud virtsecretd virtstoraged wpa_supplicant ypbind
  indirect   pcscd serial-getty@ spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh
             sssd-sudo virtlockd virtlogd vsftpd@
  masked     systemd-timedated

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd2,gpt4)/boot/vmlinuz-4.18.0-477.10.1.el8_8.x86_64
  root=UUID=e65a817a-ecea-4172-8f09-b6a7120f7868
  ro
  loglevel=3
  rd.auto=1
  console=ttyS0,115200n8
  selinux=0
  security=
  console=ttyS0,115200
  udev.children-max=512
  nmi_watchdog=0
  uv_nmi.action=kdump
  add_efi_memmap
  tsc=nowatchdog
  bau=0
  earlyprintk=ttyS0,115200
  log_buf_len=8M
  numa_balancing=disable
  crashkernel=1G,high

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 3.50 GHz and 3.50 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               0
  kernel.randomize_va_space           2
  vm.compaction_proactiveness         0
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release             Red Hat Enterprise Linux 8.8 (Ootpa)
  hpe-foundation-release HPE Foundation Software 2.5.0, Build 750.0880.240110T0100.a.rhel88hpe-240110T0100
  redhat-release         Red Hat Enterprise Linux release 8.8 (Ootpa)
  system-release         Red Hat Enterprise Linux release 8.8 (Ootpa)

------------------------------------------------------------
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
  itlb_multihit        Not affected
  l1tf                 Not affected
  mds                  Not affected
  meltdown             Not affected
  mmio_stale_data      Not affected
  retbleed             Not affected
  spec_store_bypass    Mitigation: Speculative Store Bypass disabled via prctl
  spectre_v1           Mitigation: usercopy/swapgs barriers and __user pointer sanitization
  spectre_v2           Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling, PBRSB-eIBRS: SW sequence
  srbds                Not affected
  tsx_async_abort      Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
     https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html

------------------------------------------------------------
21. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p4 xfs   2.3T  492G  1.8T  22% /

------------------------------------------------------------
22. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        Compute Scale-up Server 3200
```

(Continued on next page)

Platform Notes (Continued)

```
     Product Family: 1590PID03030201
     Serial:         5UF2491412-000

 ------------------------------------------------------------
 23. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     63x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
     65x Samsung M321R8GA0BB0-CQKZH 64 GB 2 rank 4800


 ------------------------------------------------------------
 24. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      Bundle:1.10.342-20231206_161054 SFW:009.010.108.000.2312042027
    BIOS Date:         12/04/2023
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SDSS-rev1.0.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-20 09:39:41-0500.
Report generated on 2024-02-14 12:27:32 by CPU2017 PS formatter v6716.
Originally published on 2024-02-14.