



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 257

PowerEdge R660 (Intel Xeon Silver 4509Y)

SPECrate®2017\_fp\_peak = 262

CPU2017 License: 6573


Test Date: Feb-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

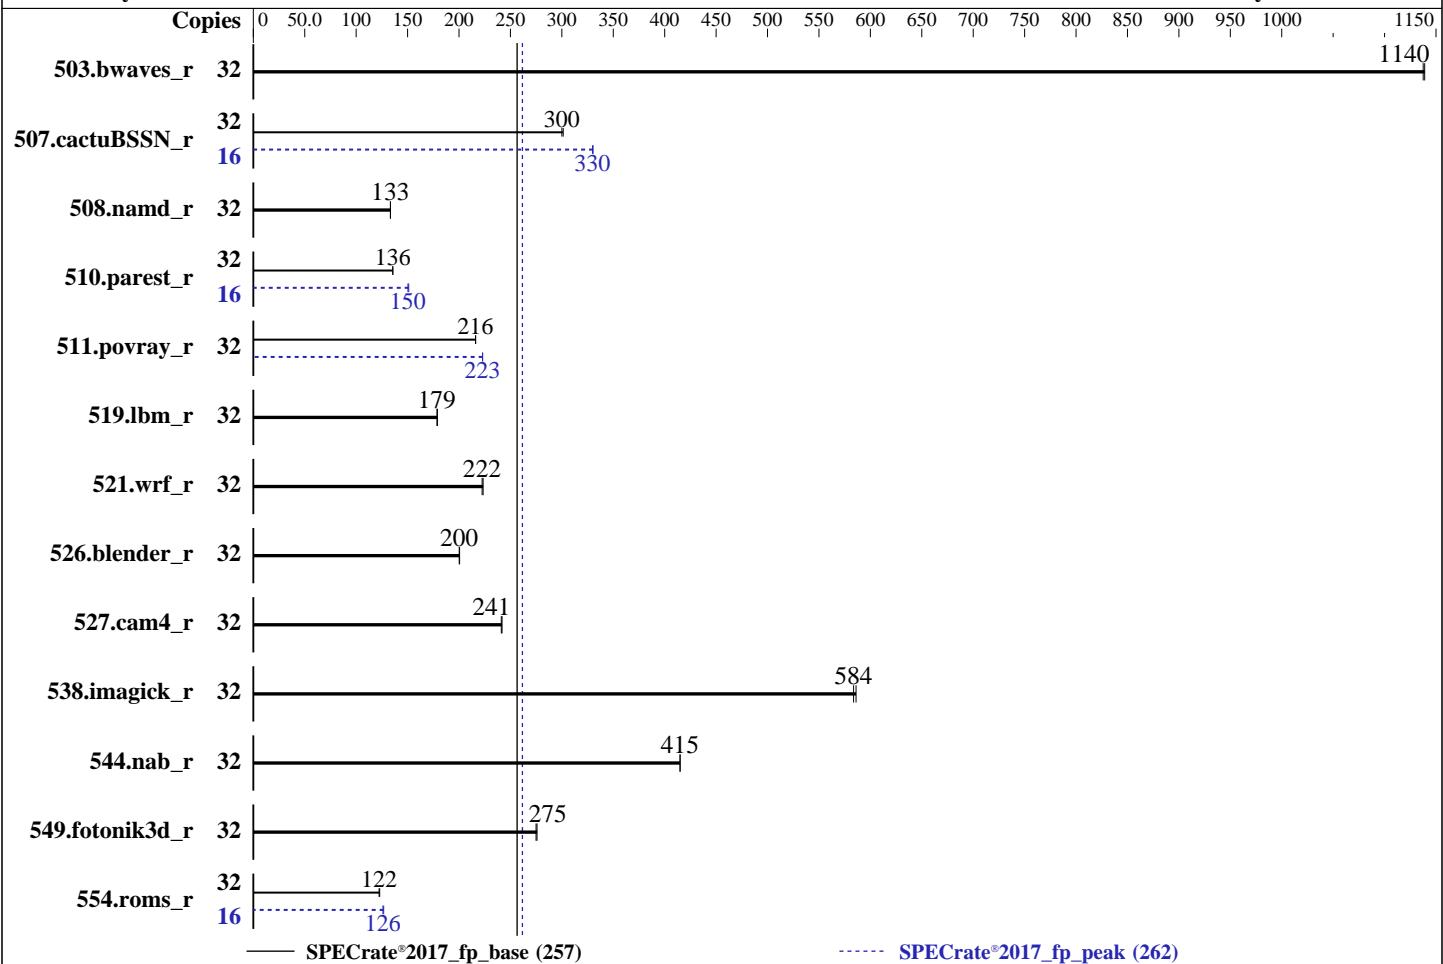

Hardware	
CPU Name:	Intel Xeon Silver 4509Y
Max MHz:	4100
Nominal:	2600
Enabled:	16 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	22.5 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)
Storage:	50 GB on tmpfs
Other:	Cooling: DLC

Software	
OS:	SUSE Linux Enterprise Server 15 SP5
Compiler:	5.14.21-150500.53-default
Parallel:	C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Firmware:	Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
File System:	No
System State:	Version 2.0.0 released Nov-2023
Base Pointers:	tmpfs
Peak Pointers:	Run level 3 (multi-user)
Other:	64-bit
Power Management:	64-bit
Power Management:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 257

PowerEdge R660 (Intel Xeon Silver 4509Y)

SPECrate®2017\_fp\_peak = 262

CPU2017 License: 6573

Test Date: Feb-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	32	282	1140	<b>282</b>	<b>1140</b>			32	282	1140	<b>282</b>	<b>1140</b>				
507.cactusBSSN_r	32	134	301	<b>135</b>	<b>300</b>			16	61.3	330	<b>61.4</b>	<b>330</b>				
508.namd_r	32	228	133	<b>228</b>	<b>133</b>			32	228	133	<b>228</b>	<b>133</b>				
510.parest_r	32	617	136	<b>618</b>	<b>136</b>			16	277	151	<b>278</b>	<b>150</b>				
511.povray_r	32	<b>346</b>	<b>216</b>	346	216			32	335	223	<b>335</b>	<b>223</b>				
519.lbm_r	32	<b>189</b>	<b>179</b>	188	179			32	<b>189</b>	<b>179</b>	188	179				
521.wrf_r	32	321	223	<b>322</b>	<b>222</b>			32	321	223	<b>322</b>	<b>222</b>				
526.blender_r	32	<b>243</b>	<b>200</b>	243	201			32	<b>243</b>	<b>200</b>	243	201				
527.cam4_r	32	231	242	<b>232</b>	<b>241</b>			32	231	242	<b>232</b>	<b>241</b>				
538.imagick_r	32	<b>136</b>	<b>584</b>	136	586			32	<b>136</b>	<b>584</b>	136	586				
544.nab_r	32	130	415	<b>130</b>	<b>415</b>			32	130	415	<b>130</b>	<b>415</b>				
549.fotonik3d_r	32	452	276	<b>454</b>	<b>275</b>			32	452	276	<b>454</b>	<b>275</b>				
554.roms_r	32	<b>416</b>	<b>122</b>	414	123			16	<b>202</b>	<b>126</b>	201	127				

SPECrate®2017\_fp\_base = 257

SPECrate®2017\_fp\_peak = 262

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 257

PowerEdge R660 (Intel Xeon Silver 4509Y)

SPECrate®2017\_fp\_peak = 262

CPU2017 License: 6573

Test Date: Feb-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

Benchmark run from a 50 GB ramdisk created with the cmd: "mount -t tmpfs -o size=50G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

    ADDDC Setting : Disabled  
    DIMM Self Healing on  
    Uncorrectable Memory Error : Disabled  
  
    Virtualization Technology : Disabled  
        DCU Streamer Prefetcher : Disabled  
            Sub NUMA Cluster : 2-way Clustering  
            LLC Prefetch : Disabled  
        Dead Line LLC Alloc : Disabled  
            Optimizer Mode : Enabled  
  
        System Profile : Custom  
        CPU Power Management : Maximum Performance  
            C1E : Disabled  
            C States : Autonomous  
        Memory Patrol Scrub : Disabled  
        Energy Efficiency Policy : Performance  
            PCI ASPM L1 Link  
                Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Feb 8 05:32:08 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 257

PowerEdge R660 (Intel Xeon Silver 4509Y)

SPECrate®2017\_fp\_peak = 262

CPU2017 License: 6573

Test Date: Feb-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
15. sysctl  
16. /sys/kernel/mm/transparent_hugepage  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
18. OS release  
19. Disk information  
20. /sys/devices/virtual/dmi/id  
21. dmidecode  
22. BIOS
```

---

```
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86_64 x86_64 x86_64 GNU/Linux
```

---

```
2. w  
05:32:08 up 3:44, 1 user, load average: 12.77, 26.50, 29.90  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttys1 - 02:03 3:28m 1.31s 0.01s /bin/bash ./dell-run-speccpu.sh rate  
--define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define  
DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1
```

---

```
3. Username  
From environment variable $USER: root
```

---

```
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 4126237  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files              (-n) 1024  
pipe size               (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority      (-r) 0  
stack size              (kbytes, -s) unlimited  
cpu time                (seconds, -t) unlimited  
max user processes       (-u) 4126237  
virtual memory           (kbytes, -v) unlimited  
file locks              (-x) unlimited
```

---

```
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
/bin/bash ./DELL_rate.sh  
/bin/bash ./dell-run-main.sh rate  
/bin/bash ./dell-run-main.sh rate  
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1  
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1  
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1  
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 -c  
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 257

PowerEdge R660 (Intel Xeon Silver 4509Y)

SPECrate®2017\_fp\_peak = 262

CPU2017 License: 6573

Test Date: Feb-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --define DL-BIOS-SNC=2
--iterations 2 --define DL-BIOSInc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1 fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=32 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=16 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --define
DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSInc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6 --output_format html,pdf,txt --define DL-LQC=1 --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
```

---

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) SILVER 4509Y
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b000571
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brs
cpu cores       : 8
siblings         : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-7
physical id 1: core ids 0-7
physical id 0: apicids 0-15
physical id 1: apicids 64-79
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

---

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:  0-31
Vendor ID:             GenuineIntel
Model name:            INTEL(R) XEON(R) SILVER 4509Y
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):             2
Stepping:              8
CPU max MHz:          4100.0000
CPU min MHz:          800.0000
BogoMIPS:              5200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
                      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
                      ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                      x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660 (Intel Xeon Silver 4509Y)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECrate®2017\_fp\_base = 257**

**SPECrate®2017\_fp\_peak = 262**

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmil hle
avx2 smep bmi2 erms invpcid rtm cqmm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqmm_llc cqmm_occup_llc cqmm_mbm_total
cqmm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi avx512vbmi umip pkum ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lll arch_capabilities
L1d cache: 768 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 32 MiB (16 instances)
L3 cache: 45 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0,4,8,14,16,20,24,30
NUMA node1 CPU(s): 2,6,10,12,18,22,26,28
NUMA node2 CPU(s): 1,5,9,13,17,21,25,29
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	768K	12	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	2M	32M	16	Unified	2	2048	1	64
L3	22.5M	45M	15	Unified	3	24576	1	64

-----

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0,4,8,14,16,20,24,30
node 0 size: 257498 MB
node 0 free: 256964 MB
node 1 cpus: 2,6,10,12,18,22,26,28
node 1 size: 258045 MB
node 1 free: 257497 MB
node 2 cpus: 1,5,9,13,17,21,25,29
node 2 size: 258011 MB
node 2 free: 257388 MB
node 3 cpus: 3,7,11,15,19,23,27,31
node 3 size: 258033 MB
node 3 free: 249038 MB
node distances:
node 0 1 2 3
 0: 10 12 21 21
 1: 12 10 21 21
 2: 21 21 10 12

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660 (Intel Xeon Silver 4509Y)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_fp\_base = 257

SPECrate®2017\_fp\_peak = 262

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

3: 21 21 12 10

9. /proc/meminfo  
MemTotal: 1056347344 kB

10. who -r  
run-level 3 Feb 8 01:48

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@  
irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections  
postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4  
wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronynd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm  
grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load lunmask  
man-db-create multipathd nfs nfs-blkmap nvmf-autoconnect rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd\_generate\_opts snmpd snmptrapd systemd-boot-check-no-failures  
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd  
vncserver@  
indirect wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=2256bbe7-6a43-48d2-b3c7-349b7f589270  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 4.10 GHz.  
The governor "powersave" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 257

PowerEdge R660 (Intel Xeon Silver 4509Y)

SPECrate®2017\_fp\_peak = 262

CPU2017 License: 6573

Test Date: Feb-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

## Platform Notes (Continued)

```
vm.dirty_ratio          20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    0

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan          4096
    scan_sleep_millisecs   10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP5

-----
19. Disk information
    SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
    Filesystem      Type  Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  50G   4.1G  46G   9% /mnt/ramdisk

-----
20. /sys/devices/virtual/dmi/id
    Vendor:        Dell Inc.
    Product:       PowerEdge R660
    Product Family: PowerEdge
    Serial:        SLR6602

-----
21. dmidecode
    Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
    2x 002C0632002C MTC40F2046S1RC56BG1 64 GB 2 rank 5600, configured at 4400
    14x 00AD063200AD HMCG94AGBRA181N 64 GB 2 rank 5600, configured at 4400
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660 (Intel Xeon Silver 4509Y)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_fp\_base = 257

SPECrate®2017\_fp\_peak = 262

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 2.0.0  
BIOS Date: 11/23/2023  
BIOS Revision: 2.0

## Compiler Version Notes

=====

C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactusBSSN\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.	SPECrate®2017_fp_base = 257
PowerEdge R660 (Intel Xeon Silver 4509Y)	SPECrate®2017_fp_peak = 262
CPU2017 License: 6573	Test Date: Feb-2024
Test Sponsor: Dell Inc.	Hardware Availability: Feb-2024
Tested by: Dell Inc.	Software Availability: Dec-2023

## Base Compiler Invocation

### C benchmarks:

icx

## C++ benchmarks:

icpx

## Fortran benchmarks:

| ifx

### Benchmarks using both Fortran and C:

ifx icx

### Benchmarks using both C and C++:

icpx icx

## Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactubSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

**(Continued on next page)**



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660 (Intel Xeon Silver 4509Y)

SPECrate®2017\_fp\_base = 257

SPECrate®2017\_fp\_peak = 262

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R660 (Intel Xeon Silver 4509Y)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_fp\_base = 257

SPECrate®2017\_fp\_peak = 262

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 257

PowerEdge R660 (Intel Xeon Silver 4509Y)

SPECrate®2017\_fp\_peak = 262

CPU2017 License: 6573

Test Date: Feb-2024

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int  
-mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-08 05:32:08-0500.

Report generated on 2024-02-28 19:22:11 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-27.