SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9254 24-Core Processor)

SPECspeed®2017_int_base = 15.3

SPECspeed®2017_int_peak = 15.5

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: May-2023
Software Availability: Sep-2023

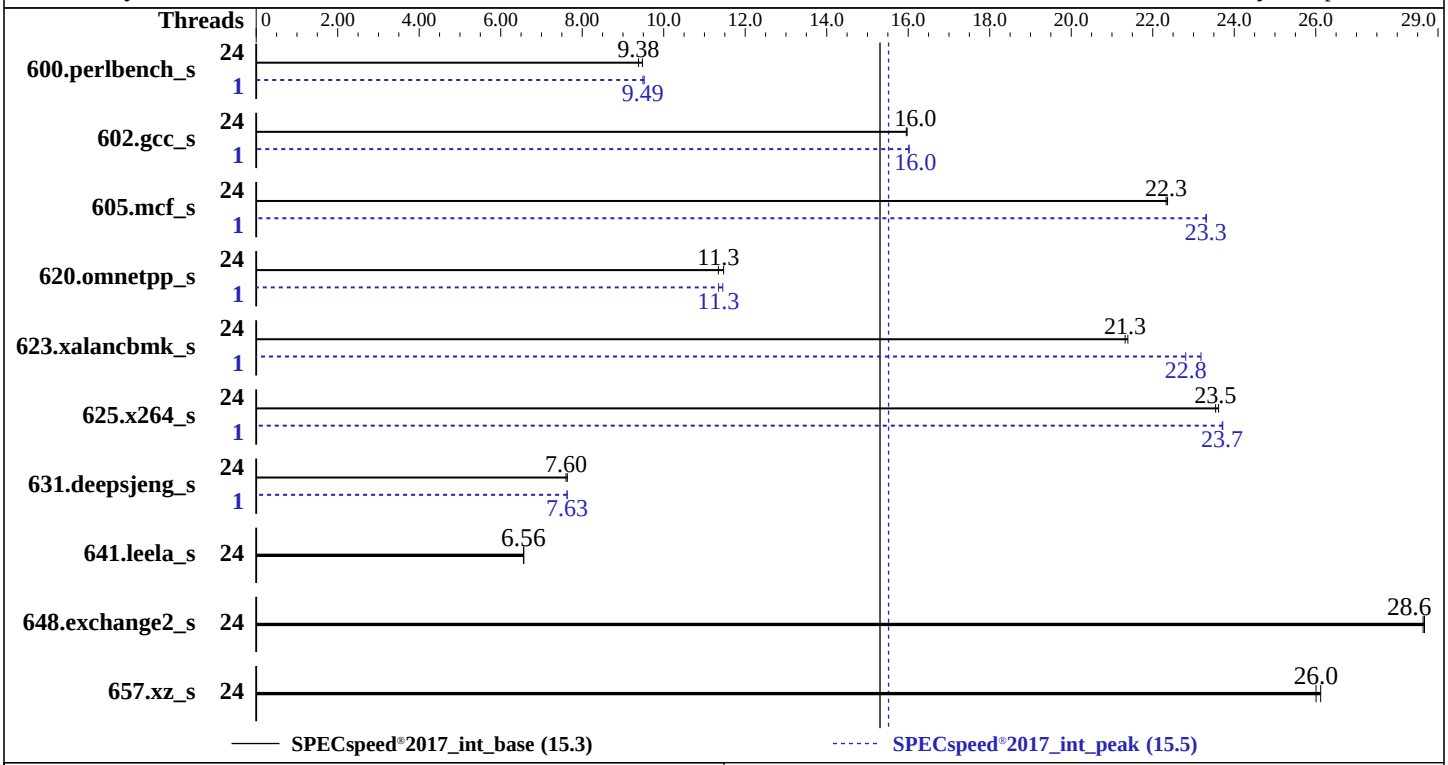

Hardware

CPU Name:	AMD EPYC 9254
Max MHz:	4150
Nominal:	2900
Enabled:	24 cores, 1 chip
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	40 GB on tmpfs
Other:	None

Software

OS:	Ubuntu 22.04.3 LTS 5.15.0-84-generic
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.4.6 released Jul-2023
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9254 24-Core Processor)

SPECspeed®2017_int_base = 15.3

SPECspeed®2017_int_peak = 15.5

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: May-2023
Software Availability: Sep-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	187	9.48	**189**	**9.38**			1	**187**	**9.49**	186	9.52		
602.gcc_s	24	249	16.0	**250**	**16.0**			1	**249**	**16.0**	248	16.0		
605.mcf_s	24	**211**	**22.3**	211	22.4			1	**203**	**23.3**	202	23.3		
620.omnetpp_s	24	**144**	**11.3**	142	11.5			1	142	11.4	**144**	**11.3**		
623.xalancbmk_s	24	66.2	21.4	**66.5**	**21.3**			1	61.1	23.2	**62.1**	**22.8**		
625.x264_s	24	**74.9**	**23.5**	74.7	23.6			1	**74.4**	**23.7**	74.4	23.7		
631.deepsjeng_s	24	188	7.64	**188**	**7.60**			1	**188**	**7.63**	188	7.63		
641.leela_s	24	260	6.57	**260**	**6.56**			24	260	6.57	**260**	**6.56**		
648.exchange2_s	24	**103**	**28.6**	103	28.7			24	**103**	**28.6**	103	28.7		
657.xz_s	24	**238**	**26.0**	237	26.1			24	**238**	**26.0**	237	26.1		

SPECspeed®2017_int_base = 15.3

SPECspeed®2017_int_peak = 15.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-23"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "24"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "15"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.


 Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"
```

Platform Notes

```
 BIOS settings:
            DRAM Refresh Delay : Performance
        DIMM Self Healing on
    Uncorrectable Memory Error : Disabled

             Logical Processor : Disabled
     Virtualization Technology : Disabled
         NUMA Nodes per Socket : 4
```

(Continued on next page)

Platform Notes (Continued)

```
                 System Profile : Custom
                       C-States : Disabled
             Memory Patrol Scrub : Disabled
             PCI ASPM L1 Link
                Power Management : Disabled
              Determinism Slider : Power Determinism
       Algorithm Performance
         Boost Disable (ApbDis) : Enabled

  Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo
  Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
  running on amd-spa Thu Dec 21 22:43:29 2023

  SUT (System Under Test) info as seen by some common utilities.

  ------------------------------------------------------------
  Table of contents
  ------------------------------------------------------------
   1. uname -a
   2. w
   3. Username
   4. ulimit -a
   5. sysinfo process ancestry
   6. /proc/cpuinfo
   7. lscpu
   8. numactl --hardware
   9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent_hugepage
  18. /sys/kernel/mm/transparent_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
  ------------------------------------------------------------

  ------------------------------------------------------------
  1. uname -a
    Linux amd-spa 5.15.0-84-generic #93-Ubuntu SMP Tue Sep 5 17:16:10 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

  ------------------------------------------------------------
  2. w
     22:43:29 up 4 min,  1 user,  load average: 0.24, 0.08, 0.02
    USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
    root     tty1     -                22:42   33.00s  1.28s  0.27s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

  ------------------------------------------------------------
  3. Username
    From environment variable $USER:  root

  ------------------------------------------------------------
  4. ulimit -a
    time(seconds)        unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   file(blocks)         unlimited
   data(kbytes)         unlimited
   stack(kbytes)        unlimited
   coredump(blocks)     0
   memory(kbytes)       unlimited
   locked memory(kbytes) 2097152
   process              3093937
   nofiles              1024
   vmemory(kbytes)      unlimited
   locks                unlimited
   rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 /bin/bash ./DELL_speed.sh
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
   --define DL-VERS=v4.8.1 --output_format html,pdf,txt
 python3 ./run_amd_speed_aocc400_znver4_A1.py
 /bin/bash ./amd_speed_aocc400_znver4_A1.sh
 runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
   DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1
   --output_format html,pdf,txt intspeed
 runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
   DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1
   --output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size test:train:refspeed
   intspeed --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log
   --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9254 24-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa10113e
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 24
    siblings        : 24
    1 physical ids (chips)
    24 processors (hardware threads)
    physical id 0: core ids 0-5,16-21,32-37,48-53
    physical id 0: apicids 0-5,16-21,32-37,48-53
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
```

(Continued on next page)

Platform Notes (Continued)

```
   Address sizes:                    52 bits physical, 57 bits virtual
   Byte Order:                       Little Endian
   CPU(s):                           24
   On-line CPU(s) list:              0-23
   Vendor ID:                        AuthenticAMD
   Model name:                       AMD EPYC 9254 24-Core Processor
   CPU family:                       25
   Model:                            17
   Thread(s) per core:               1
   Core(s) per socket:               24
   Socket(s):                        1
   Stepping:                         1
   BogoMIPS:                         5801.72
   Flags:                            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                     clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                                     lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                                     rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                                     movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                                     cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                                     topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                                     cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                                     fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                     rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                                     avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                     cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                                     wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                                     vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                                     v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                                     gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                                     rdpid overflow_recov succor smca fsrm flush_l1d
   Virtualization:                   AMD-V
   L1d cache:                        768 KiB (24 instances)
   L1i cache:                        768 KiB (24 instances)
   L2 cache:                         24 MiB (24 instances)
   L3 cache:                         128 MiB (4 instances)
   NUMA node(s):                     4
   NUMA node0 CPU(s):                0-5
   NUMA node1 CPU(s):                6-11
   NUMA node2 CPU(s):                12-17
   NUMA node3 CPU(s):                18-23
   Vulnerability Gather data sampling: Not affected
   Vulnerability Itlb multihit:      Not affected
   Vulnerability L1tf:               Not affected
   Vulnerability Mds:                Not affected
   Vulnerability Meltdown:           Not affected
   Vulnerability Mmio stale data:    Not affected
   Vulnerability Retbleed:           Not affected
   Vulnerability Spec store bypass:  Mitigation; Speculative Store Bypass disabled via prctl and seccomp
   Vulnerability Spectre v1:         Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:         Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                     filling, PBRSB-eIBRS Not affected
   Vulnerability Srbds:              Not affected
   Vulnerability Tsx async abort:    Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       32K     768K    8 Data            1    64        1             64
      L1i       32K     768K    8 Instruction     1    64        1             64
      L2         1M      24M    8 Unified         2  2048        1             64
      L3        32M     128M   16 Unified         3 32768        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-5
  node 0 size: 193079 MB
  node 0 free: 192559 MB
  node 1 cpus: 6-11
  node 1 size: 193486 MB
  node 1 free: 191337 MB
  node 2 cpus: 12-17
  node 2 size: 193533 MB
  node 2 free: 191729 MB
  node 3 cpus: 18-23
  node 3 size: 193497 MB
  node 3 free: 192543 MB
  node distances:
  node   0   1   2   3
    0:  10  12  12  12
    1:  12  10  12  12
    2:  12  12  10  12
    3:  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792164024 kB

------------------------------------------------------------
10. who -r
  run-level 5 Dec 21 22:39

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor blk-availability console-setup cron dmesg e2scrub_reap finalrd
                   getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors
                   lvm2-monitor lxd-agent multipathd networkd-dispatcher open-vm-tools pollinate rsyslog
                   secureboot-db setvtrgb ssh systemd-networkd systemd-pstore systemd-resolved
                   systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@
                   systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync upower
  generated        apport
  indirect         uuidd
  masked           cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                   systemd-networkd-wait-online x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-5.15.0-84-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2900MHz

------------------------------------------------------------
15. tuned-adm active
  Current active profile: latency-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio          3
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.3 LTS

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs   40G  3.4G   37G   9% /mnt/ramdisk

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R6615
    Product Family: PowerEdge
    Serial:         GLM4018

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    12x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.4.6
   BIOS Date:         07/06/2023
   BIOS Revision:     1.4
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
```


(Continued on next page)

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

605.mcf_s: Same as 600.perlbench_s

625.x264_s: Same as 600.perlbench_s

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-21 17:43:29-0500.
Report generated on 2024-02-29 17:29:59 by CPU2017 PS formatter v6716.
Originally published on 2024-02-29.