SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2023
Hardware Availability: May-2023
Software Availability: Sep-2023

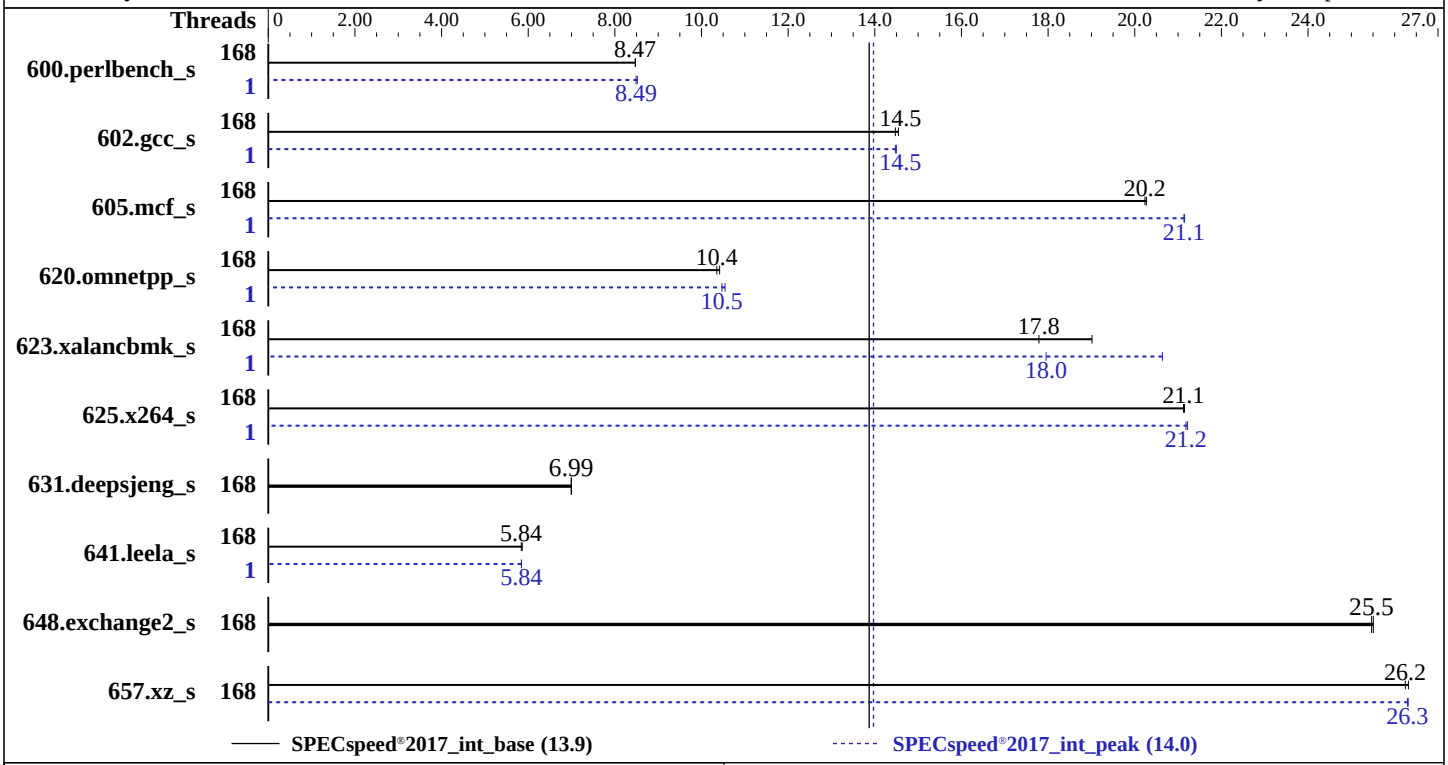

Hardware

CPU Name:	AMD EPYC 9634
Max MHz:	3700
Nominal:	2250
Enabled:	168 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 7 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	100 GB on tmpfs
Other:	None

Software

OS:	Ubuntu 22.04.3 LTS 5.15.0-84-generic
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 1.4.6 released Jul-2023
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.0

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2023
Hardware Availability: May-2023
Software Availability: Sep-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	168	209	8.48	**210**	**8.47**			1	208	8.52	**209**	**8.49**		
602.gcc_s	168	274	14.5	**275**	**14.5**			1	**275**	**14.5**	275	14.5		
605.mcf_s	168	233	20.3	**233**	**20.2**			1	**223**	**21.1**	223	21.2		
620.omnetpp_s	168	**158**	**10.4**	157	10.4			1	**156**	**10.5**	155	10.5		
623.xalancbmk_s	168	**79.7**	**17.8**	74.5	19.0			1	68.7	20.6	**78.9**	**18.0**		
625.x264_s	168	83.4	21.1	**83.5**	**21.1**			1	**83.3**	**21.2**	83.1	21.2		
631.deepsjeng_s	168	**205**	**6.99**	205	6.99			168	**205**	**6.99**	205	6.99		
641.leela_s	168	291	5.86	**292**	**5.84**			1	**292**	**5.84**	292	5.85		
648.exchange2_s	168	115	25.5	**115**	**25.5**			168	115	25.5	**115**	**25.5**		
657.xz_s	168	235	26.3	**236**	**26.2**			168	**235**	**26.3**	235	26.3		

SPECspeed®2017_int_base = 13.9

SPECspeed®2017_int_peak = 14.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-167"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "168"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-167"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.


 Benchmark run from a 100 GB ramdisk created with the cmd: "mount -t tmpfs -o size=100G tmpfs /mnt/ramdisk"
```

Platform Notes

```
 BIOS settings:
            DRAM Refresh Delay : Performance
        DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
```

(Continued on next page)

Platform Notes (Continued)

```
            Logical Processor : Disabled
     Virtualization Technology : Disabled
         NUMA Nodes per Socket : 2

               System Profile : Custom
                     C-States : Disabled
          Memory Patrol Scrub : Disabled
          PCI ASPM L1 Link
             Power Management : Disabled
           Determinism Slider : Power Determinism
      Algorithm Performance
        Boost Disable (ApbDis) : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd-spa Sun Nov  5 17:24:41 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux amd-spa 5.15.0-84-generic #93-Ubuntu SMP Tue Sep 5 17:16:10 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   17:24:41 up 2 min,  1 user,  load average: 0.27, 0.12, 0.04
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                17:23   40.00s  1.76s  0.37s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              6190306
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 /bin/bash ./DELL_speed.sh
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
   --define DL-VERS=v4.8.1 --output_format html,pdf,txt
 python3 ./run_amd_speed_aocc400_znver4_A1.py
 /bin/bash ./amd_speed_aocc400_znver4_A1.sh
 runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
   DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=2 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
   --define DL-VERS=v4.8.1 --output_format html,pdf,txt intspeed
 runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
   DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=2 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
   --define DL-VERS=v4.8.1 --output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size
   test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9634 84-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa10113e
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 84
    siblings        : 84
    2 physical ids (chips)
    168 processors (hardware threads)
    physical id 0: core ids 0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182
    physical id 1: core ids 0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182
    physical id 0: apicids 0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182
    physical id 1: apicids
    256-262,272-278,288-294,304-310,320-326,336-342,352-358,368-374,384-390,400-406,416-422,432-438
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               168
  On-line CPU(s) list:                  0-167
  Vendor ID:                            AuthenticAMD
  Model name:                           AMD EPYC 9634 84-Core Processor
  CPU family:                           25
  Model:                                17
  Thread(s) per core:                   1
  Core(s) per socket:                   84
  Socket(s):                            2
  Stepping:                             1
  BogoMIPS:                             4501.42
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                                        lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                                        rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                                        movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                                        cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                                        topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                                        cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                                        fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                        rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                                        avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                        cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                                        wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                                        vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                                        v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                                        gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                                        rdpid overflow_recov succor smca fsrm flush_l1d
  Virtualization:                       AMD-V
  L1d cache:                            5.3 MiB (168 instances)
  L1i cache:                            5.3 MiB (168 instances)
  L2 cache:                             168 MiB (168 instances)
  L3 cache:                             768 MiB (24 instances)
  NUMA node(s):                         8
  NUMA node0 CPU(s):                    0-20
  NUMA node1 CPU(s):                    21-41
  NUMA node2 CPU(s):                    42-62
  NUMA node3 CPU(s):                    63-83
  NUMA node4 CPU(s):                    84-104
  NUMA node5 CPU(s):                    105-125
  NUMA node6 CPU(s):                    126-146
  NUMA node7 CPU(s):                    147-167
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v2:           Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                      filling, PBRSB-eIBRS Not affected
  Vulnerability Srbds:                Not affected
  Vulnerability Tsx async abort:      Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K     5.3M    8 Data            1    64        1             64
     L1i       32K     5.3M    8 Instruction     1    64        1             64
     L2         1M     168M    8 Unified         2  2048        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-20
  node 0 size: 193075 MB
  node 0 free: 192480 MB
  node 1 cpus: 21-41
  node 1 size: 193481 MB
  node 1 free: 189433 MB
  node 2 cpus: 42-62
  node 2 size: 193529 MB
  node 2 free: 192936 MB
  node 3 cpus: 63-83
  node 3 size: 193513 MB
  node 3 free: 193007 MB
  node 4 cpus: 84-104
  node 4 size: 193529 MB
  node 4 free: 193199 MB
  node 5 cpus: 105-125
  node 5 size: 193529 MB
  node 5 free: 193184 MB
  node 6 cpus: 126-146
  node 6 size: 193529 MB
  node 6 free: 193197 MB
  node 7 cpus: 147-167
  node 7 size: 193502 MB
  node 7 free: 193053 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584834436 kB

------------------------------------------------------------
10. who -r
  run-level 5 Nov 5 17:22

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor blk-availability console-setup cron dmesg e2scrub_reap finalrd
                   getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors
                   lvm2-monitor lxd-agent multipathd networkd-dispatcher open-vm-tools pollinate rsyslog
                   secureboot-db setvtrgb ssh systemd-networkd systemd-pstore systemd-resolved
                   systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@
                   systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync upower
  generated        apport
  indirect         uuidd
  masked           cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                   systemd-networkd-wait-online x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-5.15.0-84-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2250MHz

------------------------------------------------------------
15. tuned-adm active
  Current active profile: latency-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio           3
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.3 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  100G  3.4G   97G   4% /mnt/ramdisk

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R6625
    Product Family: PowerEdge
    Serial:         BGP4016

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    22x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
    2x 80AD000080AD HMCG94MEBRA109N 64 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.4.6
   BIOS Date:         07/06/2023
   BIOS Revision:     1.4
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining

(Continued on next page)

Peak Optimization Flags (Continued)

602.gcc_s (continued):
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

605.mcf_s: Same as 600.perlbench_s

625.x264_s: Same as 600.perlbench_s

657.xz_s: Same as 600.perlbench_s

C++ benchmarks:

620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-05 12:24:41-0500.
Report generated on 2024-02-29 17:33:57 by CPU2017 PS formatter v6716.
Originally published on 2024-02-29.