# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11
(2.80 GHz, Intel Xeon Platinum 8562Y+)

**SPECrate®2017_fp_base = 833**

**SPECrate®2017_fp_peak = 863**

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Feb-2024
**Hardware Availability:** Feb-2024
**Software Availability:** Dec-2023

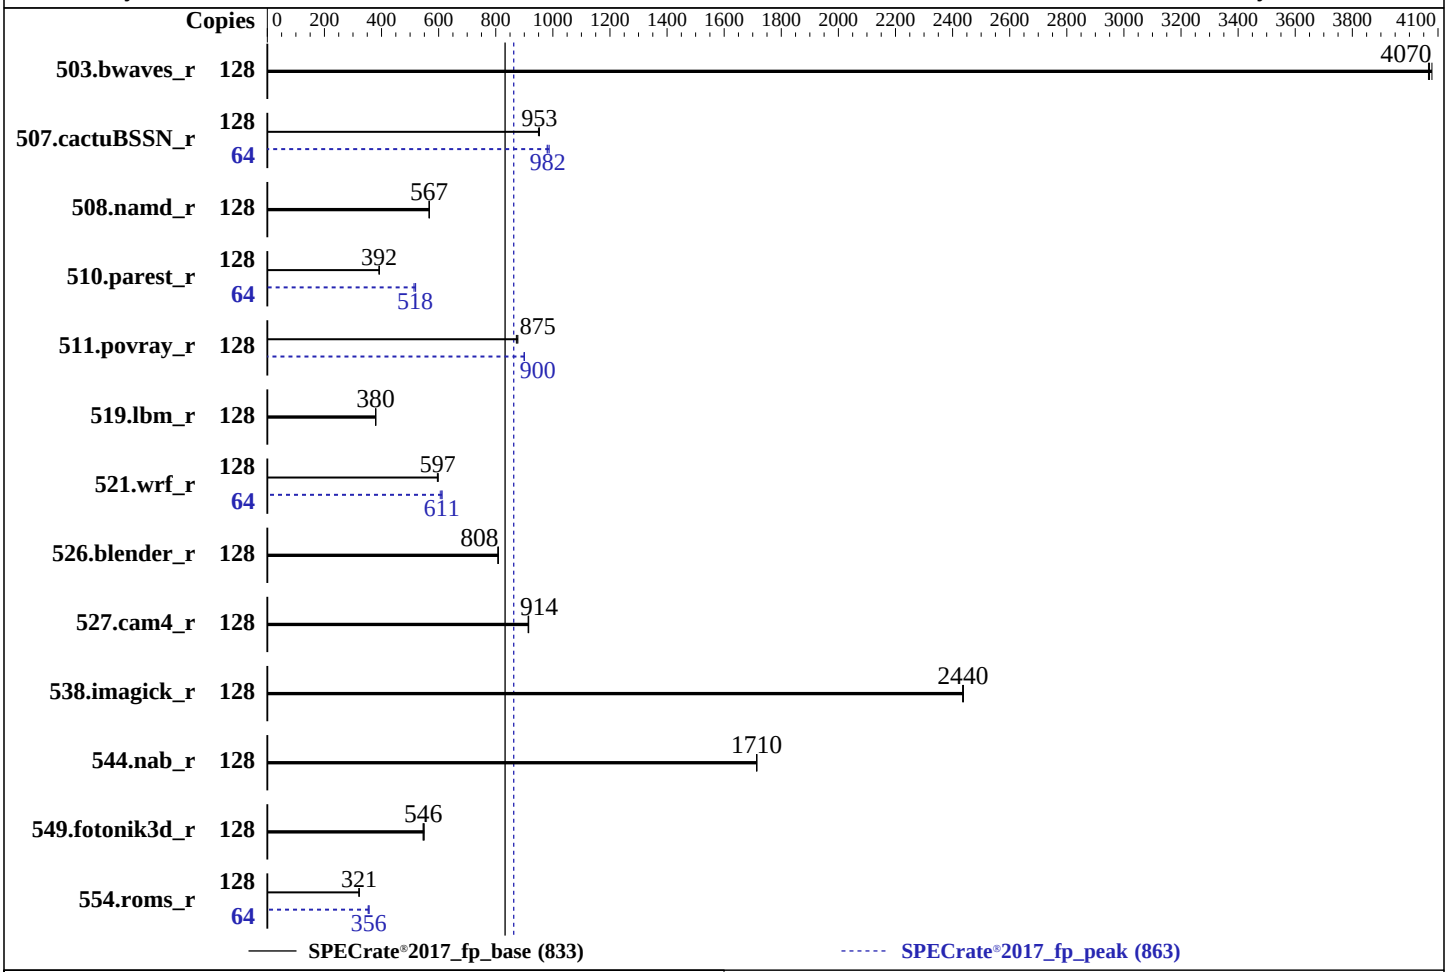


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon Platinum 8562Y+ |
| Max MHz: | 4100 |
| Nominal: | 2800 |
| Enabled: | 64 cores, 2 chips, 2 threads/core |
| Orderable: | 1, 2 chip(s) |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 60 MB I+D on chip per chip |
| Other: | None |
| Memory: | 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R) |
| Storage: | 1 x 480 GB SATA SSD |
| Other: | Cooling: DLC |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP5<br>Kernel 5.14.21-150500.53-default |
| Compiler: | C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;<br>Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux; |
| Parallel: | No |
| Firmware: | HPE BIOS Version v2.12 12/13/2023 released Dec-2023 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)
ProLiant DL360 Gen11
(2.80 GHz, Intel Xeon Platinum 8562Y+)

SPECrate®2017_fp_base = 833

SPECrate®2017_fp_peak = 863

**CPU2017 License:** 3
**Test Sponsor:** HPE
**Tested by:** HPE

**Test Date:** Feb-2024
**Hardware Availability:** Feb-2024
**Software Availability:** Dec-2023

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 128 | 315 | 4080 | **315** | **4070** | 316 | 4070 | 128 | 315 | 4080 | **315** | **4070** | 316 | 4070 |
| 507.cactuBSSN_r | 128 | 171 | 950 | **170** | **953** | 170 | 953 | 64 | 82.7 | 980 | **82.5** | **982** | 82.1 | 987 |
| 508.namd_r | 128 | 214 | 567 | 215 | 567 | **215** | **567** | 128 | 214 | 567 | 215 | 567 | **215** | **567** |
| 510.parest_r | 128 | 856 | 391 | 854 | 392 | **854** | **392** | 64 | 322 | 519 | **323** | **518** | 326 | 514 |
| 511.povray_r | 128 | 341 | 877 | 343 | 872 | **342** | **875** | 128 | 332 | 899 | **332** | **900** | 332 | 901 |
| 519.lbm_r | 128 | 355 | 380 | 356 | 379 | **355** | **380** | 128 | 355 | 380 | 356 | 379 | **355** | **380** |
| 521.wrf_r | 128 | 481 | 595 | 479 | 598 | **480** | **597** | 64 | 237 | 606 | **235** | **611** | 234 | 612 |
| 526.blender_r | 128 | 241 | 807 | **241** | **808** | 241 | 809 | 128 | 241 | 807 | **241** | **808** | 241 | 809 |
| 527.cam4_r | 128 | 245 | 915 | **245** | **914** | 245 | 914 | 128 | 245 | 915 | **245** | **914** | 245 | 914 |
| 538.imagick_r | 128 | **131** | **2440** | 131 | 2440 | 131 | 2440 | 128 | **131** | **2440** | 131 | 2440 | 131 | 2440 |
| 544.nab_r | 128 | 126 | 1710 | 126 | 1710 | **126** | **1710** | 128 | 126 | 1710 | 126 | 1710 | **126** | **1710** |
| 549.fotonik3d_r | 128 | 914 | 546 | 908 | 549 | **913** | **546** | 128 | 914 | 546 | 908 | 549 | **913** | **546** |
| 554.roms_r | 128 | 632 | 322 | 633 | 321 | **633** | **321** | 64 | 288 | 353 | **286** | **356** | 286 | 356 |

**SPECrate®2017_fp_base = 833**

**SPECrate®2017_fp_peak = 863**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

## General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
```

**(Continued on next page)**

## General Notes (Continued)

```
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
The system ROM used for this result contains Intel microcode version 0x21000200 for
the Intel Xeon Platinum 8562Y+ processor.
BIOS Configuration:
 Workload Profile set to General Throughput Compute
 Memory Patrol Scrubbing set to Disabled
 Last Level Cache (LLC) Dead Line Allocation set to Disabled
 Enhanced Processor Performance Profile set to Aggressive
 Thermal Configuration set to Maximum Cooling
 Workload Profile set to Custom
  DCU Stream Prefetcher set to Disabled
  Adjacent Sector Prefetch set to Disabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Wed Feb 28 12:51:31 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043/lp)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   12:51:31 up 1 min,  0 users,  load average: 0.59, 0.24, 0.09
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 2062642
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 2062642
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 29
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root@notty
 bash -c cd $SPEC/ && $SPEC/fprate.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
   ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : INTEL(R) XEON(R) PLATINUM 8562Y+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 207
    stepping        : 2
    microcode       : 0x21000200
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 32
    siblings        : 64
    2 physical ids (chips)
```

(Continued on next page)

## Platform Notes (Continued)

```
     128 processors (hardware threads)
     physical id 0: core ids 0-31
     physical id 1: core ids 0-31
     physical id 0: apicids 0-63
     physical id 1: apicids 128-191
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.4:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          128
   On-line CPU(s) list:             0-127
   Vendor ID:                       GenuineIntel
   Model name:                      INTEL(R) XEON(R) PLATINUM 8562Y+
   CPU family:                      6
   Model:                           207
   Thread(s) per core:              2
   Core(s) per socket:              32
   Socket(s):                       2
   Stepping:                        2
   BogoMIPS:                        5600.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                    vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                    bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                    cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                    arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
   Virtualization:                  VT-x
   L1d cache:                       3 MiB (64 instances)
   L1i cache:                       2 MiB (64 instances)
   L2 cache:                        128 MiB (64 instances)
   L3 cache:                        120 MiB (2 instances)
   NUMA node(s):                    4
   NUMA node0 CPU(s):               0-15,64-79
   NUMA node1 CPU(s):               16-31,80-95
   NUMA node2 CPU(s):               32-47,96-111
   NUMA node3 CPU(s):               48-63,112-127
   Vulnerability Itlb multihit:     Not affected
   Vulnerability L1tf:              Not affected
   Vulnerability Mds:               Not affected
   Vulnerability Meltdown:          Not affected
   Vulnerability Mmio stale data:   Not affected
   Vulnerability Retbleed:          Not affected
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                   sequence
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       3M   12 Data            1    64        1             64
     L1i       32K       2M    8 Instruction     1    64        1             64
     L2         2M     128M   16 Unified         2  2048        1             64
     L3        60M     120M   15 Unified         3 65536        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-15,64-79
  node 0 size: 128709 MB
  node 0 free: 128088 MB
  node 1 cpus: 16-31,80-95
  node 1 size: 129015 MB
  node 1 free: 128520 MB
  node 2 cpus: 32-47,96-111
  node 2 size: 128981 MB
  node 2 free: 128026 MB
  node 3 cpus: 48-63,112-127
  node 3 size: 128977 MB
  node 3 free: 128540 MB
  node distances:
  node   0   1   2   3
    0:  10  20  30  30
    1:  20  10  30  30
    2:  30  30  10  20
    3:  30  30  20  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       528060520 kB

------------------------------------------------------------
10. who -r
  run-level 3 Feb 28 12:50

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          apparmor auditd cron getty@ irqbalance issue-generator kbdsettings postfix purge-kernels
                   rollback sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                   wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell grub2-once
                   haveged haveged-switch-root hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask
                   rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator
```

**(Continued on next page)**

## Platform Notes (Continued)

```
                 systemd-sysext systemd-time-wait-sync systemd-timesyncd
  indirect       pcscd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
  root=UUID=65f8c630-625a-4316-81ef-8b2a075b341e
  splash=silent
  resume=/dev/disk/by-uuid/f51d909c-6cc3-417f-96c7-b77fec3ea376
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  max_ptes_swap             64
  pages_to_scan           4096
  scan_sleep_millisecs   10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP5

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sdb3      xfs   351G  251G  100G  72% /home

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL360 Gen11
    Product Family: ProLiant
    Serial:         CNX20800PW

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Hynix HMCG88AGBRA193N 32 GB 2 rank 5600


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       HPE
   BIOS Version:      2.12
   BIOS Date:         12/13/2023
   BIOS Revision:     2.12
   Firmware Revision: 1.55
```

## Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------

==================================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------

==================================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------

==================================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
`-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using Fortran, C, and C++:
`-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

## Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

## Peak Portability Flags

`Same as Base Portability Flags`

## Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

538.imagick_r: `basepeak = yes`

544.nab_r: `basepeak = yes`

C++ benchmarks:

508.namd_r: `basepeak = yes`

510.parest_r: `-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `basepeak = yes`

554.roms_r: `-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

Benchmarks using both Fortran and C:

521.wrf_r: `-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

527.cam4_r: `basepeak = yes`

Benchmarks using both C and C++:

511.povray_r: `-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate`(pass 1) `-fprofile-use=default.profdata`(pass 2) `-xCORE-AVX2`(pass 1) `-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

526.blender_r: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

```
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html
```

You can also download the XML flags sources by saving the following links:

```
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml
http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml
```


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.9 on 2024-02-28 02:21:31-0500.
Report generated on 2024-03-27 20:16:19 by CPU2017 PS formatter v6716.
Originally published on 2024-03-26.