



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

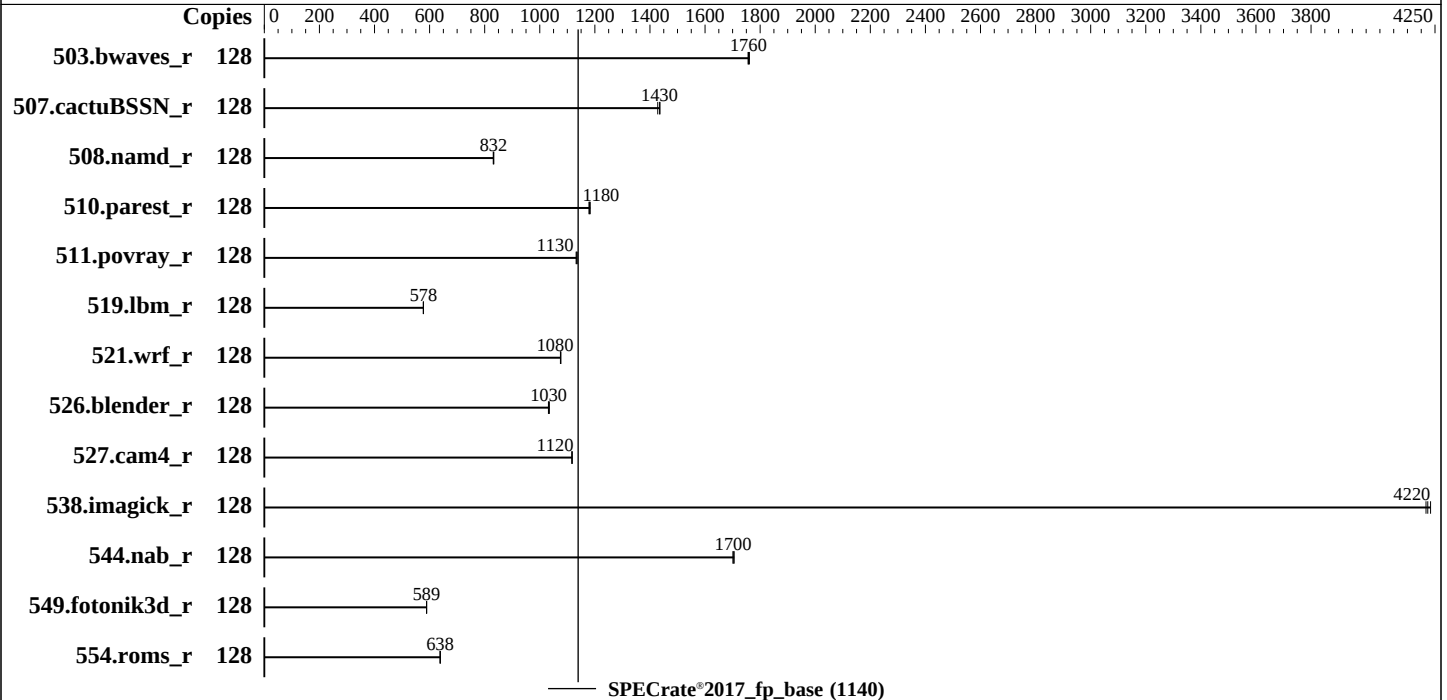

Hardware

CPU Name: AMD EPYC 9534
Max MHz: 3700
Nominal: 2450
Enabled: 128 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 256 MB I+D on chip per chip,
32 MB shared / 8 cores
Other: None
Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x PCIE NVME SSD, 6.4 TB
Other: Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
5.14.0-70.13.1.el9_0.x86_64
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
Parallel: No
Firmware: Fujitsu BIOS Version Version V5.0.0.27 R1.5.0 for
D4129-A1x. Released May-2024
tested as V5.0.0.27 R1.4.0 for D4129-A1x Jan-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS set to prefer performance
at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	729	1760	730	1760	731	1760							
507.cactuBSSN_r	128	113	1440	113	1430	113	1430							
508.namd_r	128	146	833	146	832	146	831							
510.parest_r	128	283	1180	284	1180	284	1180							
511.povray_r	128	264	1130	264	1130	263	1140							
519.lbm_r	128	234	577	233	578	234	578							
521.wrf_r	128	267	1070	266	1080	267	1080							
526.blender_r	128	189	1030	188	1030	189	1030							
527.cam4_r	128	200	1120	200	1120	200	1120							
538.imagick_r	128	75.5	4220	75.4	4220	75.2	4230							
544.nab_r	128	126	1710	127	1700	127	1700							
549.fotonik3d_r	128	847	589	846	589	847	589							
554.roms_r	128	318	639	319	638	319	638							

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/Benchmark/speccpu2017r/amd_rate_aocc400_znver4_A_lib/lib:/home/Benchmark/speccpu2017r/amd_rate_aocc400_znver4_A_lib/lib32:"

MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

SMT Control = Disabled

L2 Stream HW Prefetcher = Disabled

Determinism Slider = Power

TDP Control = Manual

TDP Limit = 300

Package Power Limit Control = Manual

Package Power Limit = 300

Power Profile Selection = High Performance

NUMA nodes per socket = NPS4

Periodic Directory Rinse (PDR) Tuning = Cache-Bound

Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017r/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Mar 4 16:21:57 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

```
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
16:21:57 up 3 min, 1 user, load average: 0.32, 0.31, 0.14
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root      tty1     16:20   13.00s  1.17s  0.16s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 3091867
max locked memory            (kbytes, -l) 2097152
max memory size              (kbytes, -m) unlimited
open files                   (-n) 1024
pipe size                    (512 bytes, -p) 8
POSIX message queues         (bytes, -q) 819200
real-time priority           (-r) 0
stack size                   (kbytes, -s) unlimited
cpu time                     (seconds, -t) unlimited
max user processes           (-u) 3091867
virtual memory               (kbytes, -v) unlimited
file locks                   (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
python3 ./run_amd_fprate_aocc400_znver4_A1.py
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

```
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runccp --config amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 fprate
runccp --configfile amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.fprate.001.0.log --lognum 001.0 --from_runccp 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu2017r
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9534 64-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa101144
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 64
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:    0-127
Vendor ID:              AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9534 64-Core Processor
BIOS Model name:        AMD EPYC 9534 64-Core Processor
CPU family:             25
Model:                  17
Thread(s) per core:     1
Core(s) per socket:     64
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU max MHz:            3718.0659
CPU min MHz:            1500.0000
BogoMIPS:               4892.91
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
svm_lock nrp_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

AMD-V

4 MiB (128 instances)

4 MiB (128 instances)

128 MiB (128 instances)

512 MiB (16 instances)

NUMA node(s):

8

NUMA node0 CPU(s):

0-15

NUMA node1 CPU(s):

16-31

NUMA node2 CPU(s):

32-47

NUMA node3 CPU(s):

48-63

NUMA node4 CPU(s):

64-79

NUMA node5 CPU(s):

80-95

NUMA node6 CPU(s):

96-111

NUMA node7 CPU(s):

112-127

Vulnerability Itlb multihit:

Not affected

Vulnerability L1tf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	4M	8	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	1M	128M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-15

node 0 size: 95773 MB

node 0 free: 94880 MB

node 1 cpus: 16-31

node 1 size: 96764 MB

node 1 free: 96305 MB

node 2 cpus: 32-47

node 2 size: 96764 MB

node 2 free: 96290 MB

node 3 cpus: 48-63

node 3 size: 96764 MB

node 3 free: 96287 MB

node 4 cpus: 64-79

node 4 size: 96764 MB

node 4 free: 96390 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 5 cpus: 80-95
node 5 size: 96764 MB
node 5 free: 96331 MB
node 6 cpus: 96-111
node 6 size: 96764 MB
node 6 free: 96358 MB
node 7 cpus: 112-127
node 7 size: 96711 MB
node 7 free: 96289 MB
node distances:
node  0  1  2  3  4  5  6  7
0: 10 12 12 12 32 32 32 32
1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10
```

9. /proc/meminfo
MemTotal: 791625568 kB

10. who -r
run-level 3 Mar 4 16:20

11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections pmcd pmie pmlogger rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd sssd sysstat systemd-network-generator udisks2 upower rc-local systemd-remount-fs
enabled-runtime	arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
disabled	canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower debug-shell fancontrol grafana-server hwloc-dump-hwdata iprdump iprinit iprupdate iscsid iscsiuiop kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvme-fc-autoconnect pmfind pmie_farm pmlogger_farm pmpoxy podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon rdisc rhcd rhsm rhsm-facts rpmbd-rebuild rrdcached saslauthd serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysextrace-cmd
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

```
rd.lvm.lv=rhel/swap
rhgb
quiet
```

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 1.50 GHz and 2.45 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 2450MHz

15. sysctl

```
kernel.numa_balancing      1
kernel.randomize_va_space  0
vm.compaction_proactiveness 20
vm.dirty_background_bytes   0
vm.dirty_background_ratio   10
vm.dirty_bytes              0
vm.dirty_expire_centisecs   3000
vm.dirty_ratio              8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold        500
vm.min_unmapped_ratio       1
vm.nr_hugepages             0
vm.nr_hugepages_mempolicy   0
vm.nr_overcommit_hugepages  0
vm.swappiness               1
vm.watermark_boost_factor   15000
vm.watermark_scale_factor   10
vm.zone_reclaim_mode        1
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

17. /sys/kernel/mm/transparent_hugepage/khugepaged

```
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

18. OS release

From /etc/*-release /etc/*-version

os-release Red Hat Enterprise Linux 9.0 (Plow)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Platform Notes (Continued)

redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)

19. Disk information

SPEC is set to: /home/Benchmark/speccpu2017r

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	5.8T	60G	5.7T	2%	/home

20. /sys/devices/virtual/dmi/id

Vendor: FUJITSU
Product: PRIMERGY RX2450 M2
Product Family: SERVER
Serial: xxxxxxxxxx

21. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M321R4GA3BB6-CQKEG 32 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: FUJITSU // American Megatrends Inc.
BIOS Version: V5.0.0.27 R1.4.0 for D4129-A1x
BIOS Date: 01/30/2024
BIOS Revision: 1.4
Firmware Revision: 2.42

Compiler Version Notes

=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++ | 508.namd_r(base) 510.parest_r(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++, C | 511.povray_r(base) 526.blender_r(base)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++, C, Fortran | 507.cactuBSSN_r(base)

=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)

=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)

=====
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

C++ benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop  
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl, -mllvm -Wl, -align-all-nofallthru-blocks=6  
-Wl, -mllvm -Wl, -reduce-array-computations=3  
-Wl, -mllvm -Wl, -x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9534, 2.45 GHz

SPECrate®2017_fp_base = 1140

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Nov-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Genoa-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Genoa-RevD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-04 16:21:57-0500.

Report generated on 2025-05-13 15:02:43 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.