



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

**SPECSpeed®2017\_fp\_base = 71.0**

**SPECSpeed®2017\_fp\_peak = 71.0**

CPU2017 License: 001176


Test Date: Mar-2024

Test Sponsor: Supermicro

Hardware Availability: Dec-2023

Tested by: Supermicro

Software Availability: Dec-2023

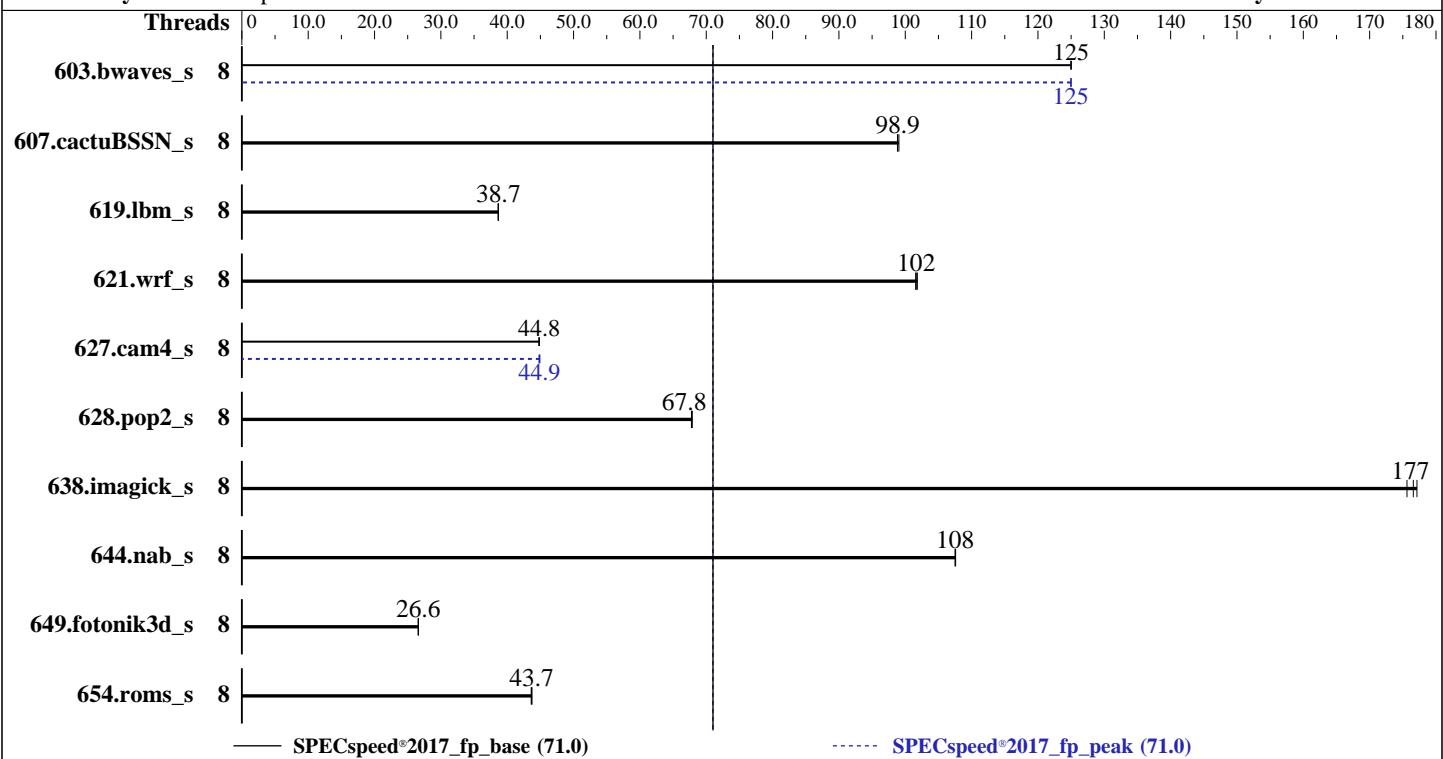

## Hardware

CPU Name: Intel Xeon E-2468  
Max MHz: 5200  
Nominal: 2600  
Enabled: 8 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 24 MB I+D on chip per chip  
Other: None  
Memory: 128 GB (4 x 32 GB 2Rx8 PC5-4800B-U, running at 3600)  
Storage: 1 x 240 GB SATA III SSD  
Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP5  
Compiler: Kernel 5.14.21-150500.53-default  
C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: Version 1.1 released Dec-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

**SPECspeed®2017\_fp\_base = 71.0**

**SPECspeed®2017\_fp\_peak = 71.0**

CPU2017 License: 001176

Test Date: Mar-2024

Test Sponsor: Supermicro

Hardware Availability: Dec-2023

Tested by: Supermicro

Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	8	472	125	472	125	<b>472</b>	<b>125</b>	8	472	125	472	125	<b>472</b>	<b>125</b>
607.cactuBSSN_s	8	168	99.0	169	98.8	<b>169</b>	<b>98.9</b>	8	168	99.0	169	98.8	<b>169</b>	<b>98.9</b>
619.lbm_s	8	135	38.7	<b>135</b>	<b>38.7</b>	136	38.6	8	135	38.7	<b>135</b>	<b>38.7</b>	136	38.6
621.wrf_s	8	<b>130</b>	<b>102</b>	130	102	130	102	8	<b>130</b>	<b>102</b>	130	102	130	102
627.cam4_s	8	198	44.8	<b>198</b>	<b>44.8</b>	198	44.8	8	<b>197</b>	<b>44.9</b>	197	44.9	198	44.8
628.pop2_s	8	175	67.9	175	67.8	<b>175</b>	<b>67.8</b>	8	175	67.9	175	67.8	<b>175</b>	<b>67.8</b>
638.imagick_s	8	<b>81.7</b>	<b>177</b>	82.1	176	81.4	177	8	<b>81.7</b>	<b>177</b>	82.1	176	81.4	177
644.nab_s	8	162	108	<b>162</b>	<b>108</b>	162	108	8	162	108	<b>162</b>	<b>108</b>	162	108
649.fotonik3d_s	8	342	26.6	343	26.6	<b>343</b>	<b>26.6</b>	8	342	26.6	343	26.6	<b>343</b>	<b>26.6</b>
654.roms_s	8	360	43.7	<b>360</b>	<b>43.7</b>	361	43.6	8	360	43.7	<b>360</b>	<b>43.7</b>	361	43.6
<b>SPECspeed®2017_fp_base = 71.0</b>														
<b>SPECspeed®2017_fp_peak = 71.0</b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via tuned-adm profile throughput-performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

SPECSpeed®2017\_fp\_base = 71.0

SPECSpeed®2017\_fp\_peak = 71.0

CPU2017 License: 001176

Test Date: Mar-2024

Test Sponsor: Supermicro

Hardware Availability: Dec-2023

Tested by: Supermicro

Software Availability: Dec-2023

## Platform Notes

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 135-180-39 Thu Mar 7 01:28:18 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

```
1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
-----
```

```
1. uname -a
Linux 135-180-39 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
-----
```

```
2. w
01:28:18 up 1 day, 14:33, 1 user, load average: 7.55, 6.86, 4.22
USER      TTY      FROM          LOGIN@    IDLE    JCPU    PCPU WHAT
root      ttym1     -           Tue10    17:04m  0.81s  0.00s -bash
-----
```

```
3. Username
From environment variable $USER: root
-----
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 514621
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

SPECspeed®2017\_fp\_base = 71.0

SPECspeed®2017\_fp\_peak = 71.0

CPU2017 License: 001176

Test Date: Mar-2024

Test Sponsor: Supermicro

Hardware Availability: Dec-2023

Tested by: Supermicro

Software Availability: Dec-2023

## Platform Notes (Continued)

```
pipe size          (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority      (-r) 0
stack size            (kbytes, -s) unlimited
cpu time              (seconds, -t) unlimited
max user processes     (-u) 514621
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-core-avx2-speed-20231121.cfg --define cores=8 --tune base,peak -o all --define smt-on
  --define drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-core-avx2-speed-20231121.cfg --define cores=8 --tune base,peak --output_format all --define
  smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.004/templogs/preenv.fpspeed.004.0.log --lognum 004.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
  model name      : Intel(R) Xeon(R) E E-2468
  vendor_id       : GenuineIntel
  cpu family      : 6
  model           : 183
  stepping         : 1
  microcode        : 0x11f
  bugs             : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brsb
  cpu cores       : 8
  siblings          : 16
  1 physical ids (chips)
  16 processors (hardware threads)
  physical id 0: core ids 0-7
  physical id 0: apicids 0-15
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu
```

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          42 bits physical, 48 bits virtual
Byte Order:              Little Endian
CPU(s):                  16
On-line CPU(s) list:    0-15
Vendor ID:               GenuineIntel
Model name:              Intel(R) Xeon(R) E E-2468
CPU family:              6
Model:                   183
Thread(s) per core:     2
Core(s) per socket:      8
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

**SPECspeed®2017\_fp\_base = 71.0**

**SPECspeed®2017\_fp\_peak = 71.0**

**CPU2017 License:** 001176

**Test Date:** Mar-2024

**Test Sponsor:** Supermicro

**Hardware Availability:** Dec-2023

**Tested by:** Supermicro

**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

Socket(s): 1
Stepping: 1
Frequency boost: enabled
CPU max MHz: 2601.0000
CPU min MHz: 800.0000
BogoMIPS: 5222.40
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
       nonstop_tsc cpuid aperfmonperfcnt tsc_known_freq pn1 pclmulqdq dtes64 monitor
       ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtr pdcn pcid sse4_1 sse4_2
       x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
       abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
       ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsfsbase
       tsc_adjust bmil avx2 smp bmi2 erts invpcid rdseed adx smap clflushopt
       clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
       avx_vnni dtherm ida arat pln pts hfi umip pkru ospke waitpkg gfni vaes
       vpclmulqdq tme rdpid movdiri64b fsrm md_clear serialize pconfig
       arch_lbr flush_ll1d arch_capabilities
Virtualization:
L1d cache: 384 KiB (8 instances)
L1i cache: 256 KiB (8 instances)
L2 cache: 16 MiB (8 instances)
L3 cache: 24 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-15
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64
L1i	32K	256K	8	Instruction	1	64	1	64
L2	2M	16M	16	Unified	2	2048	1	64
L3	24M	24M	12	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-15
node 0 size: 128684 MB
node 0 free: 102570 MB
node distances:
node 0
 0: 10

```

-----  
9. /proc/meminfo

```

MemTotal: 131773428 kB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

SPECspeed®2017\_fp\_base = 71.0

SPECspeed®2017\_fp\_peak = 71.0

CPU2017 License: 001176

Test Date: Mar-2024

Test Sponsor: Supermicro

Hardware Availability: Dec-2023

Tested by: Supermicro

Software Availability: Dec-2023

## Platform Notes (Continued)

10. who -r  
run-level 3 Mar 5 10:54

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance  
issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog  
smartd sshd systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6  
wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronynd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info  
firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievrd issue-add-ssh-keys  
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd  
serial-getty@ smartd\_generate\_opts snmpd snmptrapd systemd-boot-check-no-failures  
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2  
vncserver@  
indirect wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=17d35bd2-89c2-43c1-9d3d-27a470d7f01d  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 2.60 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

15. tuned-adm active  
Current active profile: throughput-performance

16. sysctl  
kernel.numa\_balancing 0  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

SPECSpeed®2017\_fp\_base = 71.0

SPECSpeed®2017\_fp\_peak = 71.0

CPU2017 License: 001176

Test Date: Mar-2024

Test Sponsor: Supermicro

Hardware Availability: Dec-2023

Tested by: Supermicro

Software Availability: Dec-2023

## Platform Notes (Continued)

```
vm.dirty_writeback_centisecs      500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold            500
vm.min_unmapped_ratio           1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                     10
vm.watermark_boost_factor       15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode              0

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag           always defer defer+madvise [madvise] never
    enabled          [always] madvise never
    hpage_pmd_size   2097152
    shmem_enabled    always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs   60000
    defrag                  1
    max_ptes_none           511
    max_ptes_shared          256
    max_ptes_swap             64
    pages_to_scan            4096
    scan_sleep_millisecs     10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP5

-----
20. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda5        xfs   149G   31G  119G  21%  /

-----
21. /sys/devices/virtual/dmi/id
    Vendor:        Supermicro
    Product:       Super Server
    Serial:        0123456789

-----
22. dmidecode
    Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        4x Samsung M323R4GA3BB0-CQKOL 32 GB 2 rank 4800, configured at 3600

-----
23. BIOS
    (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor: American Megatrends International, LLC.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

SPECSpeed®2017\_fp\_base = 71.0

SPECSpeed®2017\_fp\_peak = 71.0

CPU2017 License: 001176

Test Date: Mar-2024

Test Sponsor: Supermicro

Hardware Availability: Dec-2023

Tested by: Supermicro

Software Availability: Dec-2023

## Platform Notes (Continued)

BIOS Version: 1.1  
BIOS Date: 12/08/2023  
BIOS Revision: 5.27

## Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 607.cactubssn_s(base, peak)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
-----

=====
Fortran, C   | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
-----
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

SPECspeed®2017\_fp\_base = 71.0

SPECspeed®2017\_fp\_peak = 71.0

CPU2017 License: 001176

Test Date: Mar-2024

Test Sponsor: Supermicro

Hardware Availability: Dec-2023

Tested by: Supermicro

Software Availability: Dec-2023

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_S: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

SPECSpeed®2017\_fp\_base = 71.0

SPECSpeed®2017\_fp\_peak = 71.0

CPU2017 License: 001176

Test Date: Mar-2024

Test Sponsor: Supermicro

Hardware Availability: Dec-2023

Tested by: Supermicro

Software Availability: Dec-2023

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX2 -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Supermicro

UP SuperServer SYS-111R-M  
(X13SCH-SYS , Intel Xeon E-2468)

SPECSpeed®2017\_fp\_base = 71.0

SPECSpeed®2017\_fp\_peak = 71.0

CPU2017 License: 001176

Test Date: Mar-2024

Test Sponsor: Supermicro

Hardware Availability: Dec-2023

Tested by: Supermicro

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -futto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
628.pop2_s: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
607.cactuBSSN_s: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-RKL-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-RKL-revB.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-06 12:28:18-0500.

Report generated on 2024-04-09 15:42:30 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-09.