



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Mar-2024

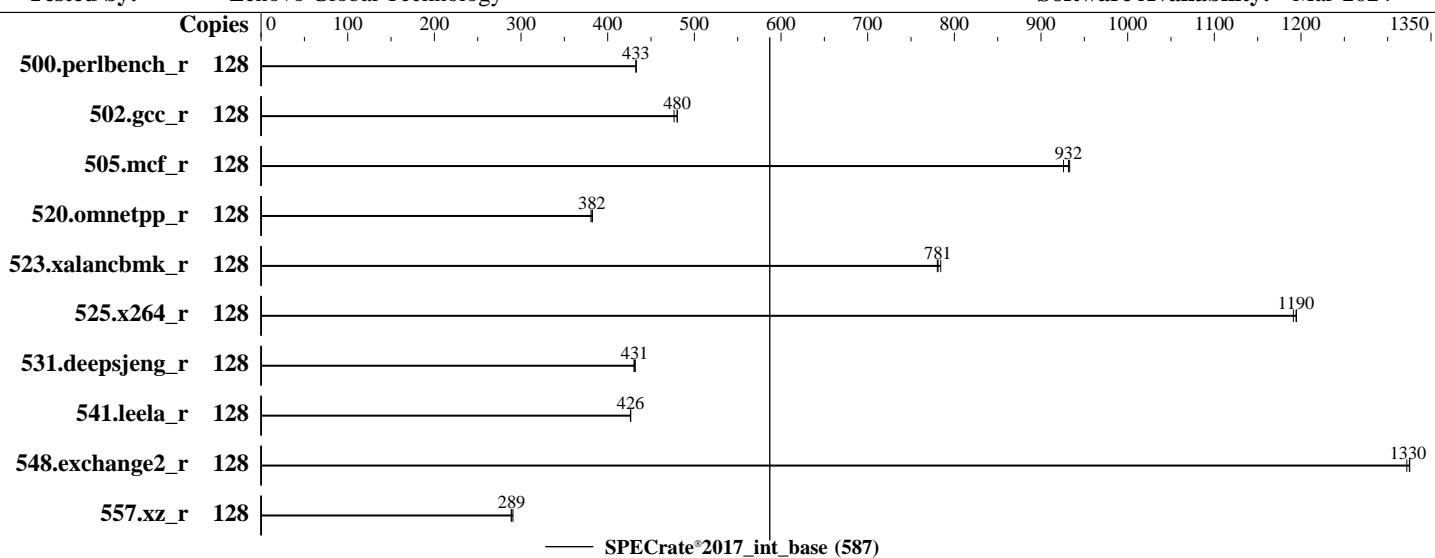

### Hardware

CPU Name: Intel Xeon Gold 6538Y+  
Max MHz: 4000  
Nominal: 2200  
Enabled: 64 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 60 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 5200)  
Storage: 1 x 960 GB SATA SSD  
Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Lenovo BIOS Version ESE123C 3.12 released Feb-2024  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	471	433	471	433	<b>471</b>	<b>433</b>							
502.gcc_r	128	<b>377</b>	<b>480</b>	377	480	380	477							
505.mcf_r	128	223	926	222	933	<b>222</b>	<b>932</b>							
520.omnetpp_r	128	441	381	439	382	<b>440</b>	<b>382</b>							
523.xalancbmk_r	128	172	784	<b>173</b>	<b>781</b>	173	780							
525.x264_r	128	188	1190	<b>188</b>	<b>1190</b>	188	1190							
531.deepsjeng_r	128	341	430	340	432	<b>340</b>	<b>431</b>							
541.leela_r	128	497	427	497	426	<b>497</b>	<b>426</b>							
548.exchange2_r	128	<b>253</b>	<b>1330</b>	253	1330	254	1320							
557.xz_r	128	476	291	<b>478</b>	<b>289</b>	479	289							

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2024.0.2/lib/intel64:/home/cpu2017-1.1.9-ic2024.0.2/lib/ia32:/home/cpu2017-1.1.9-ic2024.0.2/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

SNC set to SNC2

LLC Prefetch set to Disabled

UPI Link Disable set to Minimum Number of Links Enabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2024.0.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on test1 Sat Mar 16 19:52:52 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux test1 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222) x86\_64  
x86\_64 x86\_64 GNU/Linux

-----

2. w  
19:52:52 up 1 min, 1 user, load average: 4.77, 2.62, 1.00  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root ttym1 - 19:52 12.00s 0.97s 0.00s -bash

-----

3. Username  
From environment variable \$USER: root

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

```
-----  
4. ulimit -a  
core file size          (blocks, -c) unlimited  
data seg size           (kbytes, -d) unlimited  
scheduling priority     (-e) 0  
file size               (blocks, -f) unlimited  
pending signals          (-i) 4126871  
max locked memory       (kbytes, -l) 64  
max memory size         (kbytes, -m) unlimited  
open files               (-n) 1024  
pipe size                (512 bytes, -p) 8  
POSIX message queues    (bytes, -q) 819200  
real-time priority       (-r) 0  
stack size               (kbytes, -s) unlimited  
cpu time                 (seconds, -t) unlimited  
max user processes        (-u) 4126871  
virtual memory            (kbytes, -v) unlimited  
file locks                (-x) unlimited
```

```
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c  
  ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=64 --define physicalfirst  
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile  
  ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=64 --define physicalfirst  
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode  
  rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile  
  $SPEC/tmp/CPU2017.063/templogs/preenv.intrate.063.0.log --lognum 063.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017-1.1.9-ic2024.0.2
```

```
-----  
6. /proc/cpuinfo  
model name      : INTEL(R) XEON(R) GOLD 6538Y+  
vendor_id       : GenuineIntel  
cpu family     : 6  
model          : 207  
stepping        : 2  
microcode       : 0x21000200  
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores       : 32  
siblings        : 64  
2 physical ids (chips)  
128 processors (hardware threads)  
physical id 0: core ids 0-31  
physical id 1: core ids 0-31  
physical id 0: apicids 0-63  
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

From lscpu from util-linux 2.37.2:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) GOLD 6538Y+
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 2
BogoMIPS: 4400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperf mperf tsc_known_freq pnipclmulqdq dtes64 ds_cpl
       vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
       x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
       abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
       cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
       ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smp bmi2 erms invpcid
       rtm cqmqrdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb
       intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves
       cqmqllc cqmqoccup_llc cqmqmbm_total cqmqmbm_local avx_vnni avx512_bf16
       wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
       avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
       avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
       enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16
       amx_tile flush_lll arch_capabilities
Virtualization: VT-x
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
      L1d     48K      3M   12 Data        1      64      1          64
      L1i     32K      2M    8 Instruction  1      64      1          64
      L2      2M      128M   16 Unified      2  2048      1          64
      L3     60M      120M   15 Unified      3 65536      1          64

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-15,64-79
node 0 size: 257703 MB
node 0 free: 256626 MB
node 1 cpus: 16-31,80-95
node 1 size: 258039 MB
node 1 free: 257185 MB
node 2 cpus: 32-47,96-111
node 2 size: 258039 MB
node 2 free: 257778 MB
node 3 cpus: 48-63,112-127
node 3 size: 257958 MB
node 3 free: 257554 MB
node distances:
node 0 1 2 3
 0: 10 12 21 21
 1: 12 10 21 21
 2: 21 21 10 12
 3: 21 21 12 10
```

-----

9. /proc/meminfo

```
MemTotal: 1056503584 kB
```

-----

10. who -r

```
run-level 3 Mar 16 19:52
```

-----

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)

```
Default Target Status
multi-user running
```

-----

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance iscsi           issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog           smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait           chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info           firewalld gpm grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiuio           issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb rdisc           rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd           systemd-boot-check-no-failures systemd-network-generator systemd-sysext           systemd-time-wait-sync systemd-timesyncd
generated	ntp_sync
indirect	wickedd

-----

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=f976c541-a329-4c54-ba84-4be16556ee18
splash=silent
mitigations=auto
quiet
security=apparmor
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Mar-2024

## Platform Notes (Continued)

```
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes
```

```
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0
```

```
16. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs        60000
defrag                      1
max_ptes_none                511
max_ptes_shared              256
max_ptes_swap                64
pages_to_scan                4096
scan_sleep_millisecs         10000
```

```
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4
```

```
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.0.2
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sdb2    xfs   894G  253G  641G  29% /
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

20. /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: ThinkSystem SR630 V3  
Product Family: ThinkSystem  
Serial: 1234567890

-----  
21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

14x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 5200  
2x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 5200

-----  
22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: ESE123C-3.12  
BIOS Date: 02/22/2024  
BIOS Revision: 3.12  
Firmware Revision: 12.6

## Compiler Version Notes

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2\_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

## Base Compiler Invocation

C benchmarks:  
icx

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V3  
(2.20 GHz, Intel Xeon Gold 6538Y+)

SPECrate®2017\_int\_base = 587

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-16 07:52:51-0400.

Report generated on 2024-04-09 15:51:14 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-09.