SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9634, 2.25 GHz

SPECrate®2017_int_base = 1350

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Nov-2022

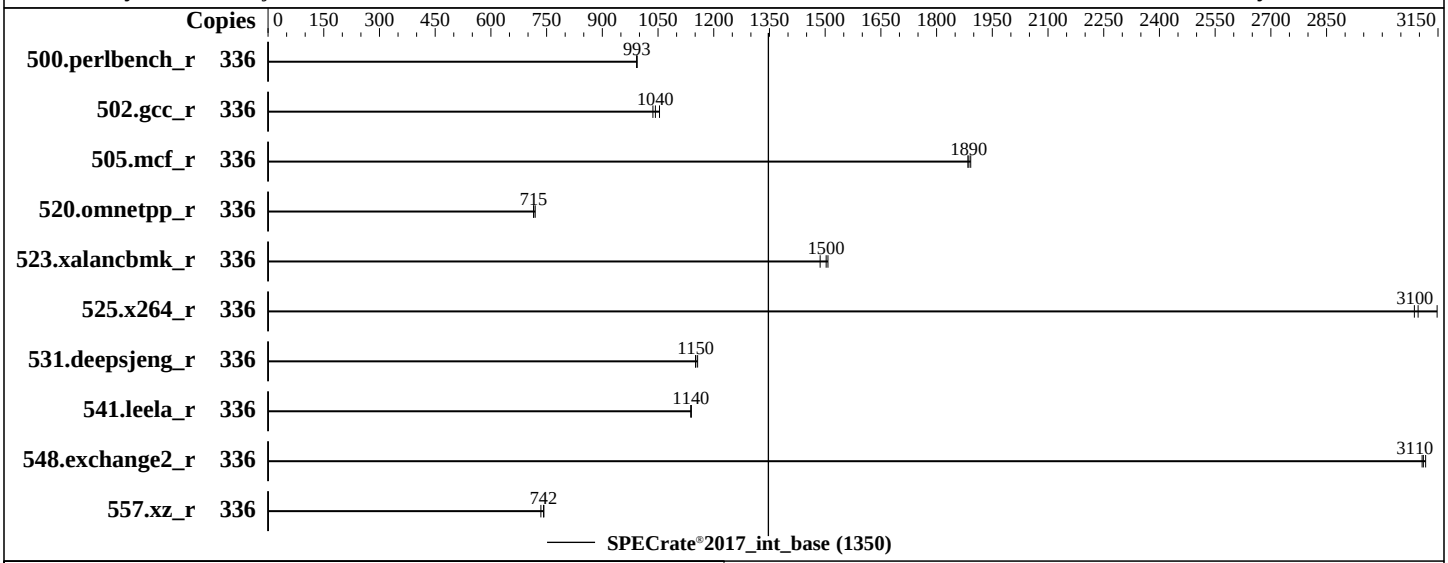

Hardware

CPU Name:	AMD EPYC 9634
Max MHz:	3700
Nominal:	2250
Enabled:	168 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 7 cores
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x SATA SSD, 960 GB
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	No
Firmware:	Fujitsu BIOS Version Version V5.0.0.27 R1.5.0 for D4129-A1x. Released May-2024 tested as V5.0.0.27 R1.4.0 for D4129-A1x Jan-2024
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2450 M2,
AMD EPYC 9634, 2.25 GHz

SPECrate®2017_int_base = 1350

SPECrate®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	336	538	993	**539**	**993**	539	993							
502.gcc_r	336	459	1040	451	1050	**456**	**1040**							
505.mcf_r	336	287	1890	288	1880	**288**	**1890**							
520.omnetpp_r	336	613	719	617	715	**616**	**715**							
523.xalancbmk_r	336	**236**	**1500**	235	1510	239	1490							
525.x264_r	336	187	3150	**190**	**3100**	191	3090							
531.deepsjeng_r	336	335	1150	333	1160	**334**	**1150**							
541.leela_r	336	489	1140	488	1140	**489**	**1140**							
548.exchange2_r	336	283	3110	282	3120	**283**	**3110**							
557.xz_r	336	**489**	**742**	489	743	494	735							

SPECrate®2017_int_base = 1350

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/Benchmark/speccpu2017r/amd_rate_aocc400_znver4_A_lib/lib:/home/Benchmark/speccpu2017r/amd_rate_
     aocc400_znver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Determinism Slider = Power
TDP Control = Manual
TDP Limit = 300
Package Power Limit Control = Manual
Package Power Limit = 300
DF PState Frequency Optimizer = Enabled
Power Profile Selection = High Performance
NUMA nodes per socket = NPS4
Chipselect Interleaving = Enabled
Probe Filter Organization = Shared
Periodic Directory Rinse (PDR) Tuning = Cache-Bound
Fan Control = Full


 Sysinfo program /home/Benchmark/speccpu2017r/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Wed Mar 13 06:56:43 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
```

(Continued on next page)

Platform Notes (Continued)

```
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   06:56:43 up 12 min,  1 user,  load average: 0.19, 0.07, 0.02
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                06:55   19.00s  1.44s  0.24s /bin/bash ./amd_rate_aocc400_znver4_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 3093471
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 65536
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 3093471
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 login -- root
 -bash
 -bash
 python3 ./run_amd_intrate_aocc400_znver4_A1.py
 /bin/bash ./amd_rate_aocc400_znver4_A1.sh
 runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 intrate
 runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune base --reportable --iterations 3 --nopower
   --runmode rate --tune base --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/Benchmark/speccpu2017r
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9634 84-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa101144
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 84
    siblings        : 168
    2 physical ids (chips)
    336 processors (hardware threads)
    physical id 0: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94
    physical id 1: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94
    physical id 0: apicids 0-13,16-29,32-45,48-61,64-77,80-93,96-109,112-125,128-141,144-157,160-173,176-189
    physical id 1: apicids
    256-269,272-285,288-301,304-317,320-333,336-349,352-365,368-381,384-397,400-413,416-429,432-445
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          336
  On-line CPU(s) list:             0-335
  Vendor ID:                       AuthenticAMD
  Model name:                      AMD EPYC 9634 84-Core Processor
  CPU family:                      25
  Model:                           17
  Thread(s) per core:              2
  Core(s) per socket:              84
  Socket(s):                       2
  Stepping:                        1
  Frequency boost:                 enabled
  CPU max MHz:                     3700.1951
  CPU min MHz:                     1500.0000
  BogoMIPS:                        4492.96
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                   constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                   pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                                   popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                   abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                   perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                   invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                   avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                   xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                   avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                   svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                   pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                   umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                   avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
```

(Continued on next page)

Platform Notes (Continued)

```
  Virtualization:                  AMD-V
  L1d cache:                       5.3 MiB (168 instances)
  L1i cache:                       5.3 MiB (168 instances)
  L2 cache:                        168 MiB (168 instances)
  L3 cache:                        768 MiB (24 instances)
  NUMA node(s):                    8
  NUMA node0 CPU(s):               0-20,168-188
  NUMA node1 CPU(s):               21-41,189-209
  NUMA node2 CPU(s):               42-62,210-230
  NUMA node3 CPU(s):               63-83,231-251
  NUMA node4 CPU(s):               84-104,252-272
  NUMA node5 CPU(s):               105-125,273-293
  NUMA node6 CPU(s):               126-146,294-314
  NUMA node7 CPU(s):               147-167,315-335
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                   filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K     5.3M    8 Data            1    64        1             64
     L1i       32K     5.3M    8 Instruction     1    64        1             64
     L2         1M     168M    8 Unified         2  2048        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-20,168-188
  node 0 size: 96219 MB
  node 0 free: 94045 MB
  node 1 cpus: 21-41,189-209
  node 1 size: 96757 MB
  node 1 free: 96360 MB
  node 2 cpus: 42-62,210-230
  node 2 size: 96757 MB
  node 2 free: 96293 MB
  node 3 cpus: 63-83,231-251
  node 3 size: 96757 MB
  node 3 free: 96385 MB
  node 4 cpus: 84-104,252-272
  node 4 size: 96757 MB
  node 4 free: 96398 MB
  node 5 cpus: 105-125,273-293
  node 5 size: 96757 MB
  node 5 free: 96002 MB
  node 6 cpus: 126-146,294-314
  node 6 size: 96757 MB
  node 6 free: 96376 MB
  node 7 cpus: 147-167,315-335
  node 7 size: 96627 MB
  node 7 free: 96207 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       791953268 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 13 06:45

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged
                  irqbalance iscsi issue-generator kbdsettings klog libvirtd lvm2-monitor nscd postfix
                  purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                  wickedd-dhcp6 wickedd-nanny
  enabled-runtime systemd-remount-fs
  disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell dnsmasq ebtables exchange-bmc-os-info
                  firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd iscsi-init
                  iscsid issue-add-ssh-keys kdump kdump-early kexec-load ksm kvm_stat libvirt-guests lunmask
                  man-db-create multipathd nfs nfs-blkmap nfs-server nfsserver rdisc rpcbind rpmconfigcheck
                  rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd strongswan strongswan-starter
                  svnserve systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@
                  systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced
                  virtnetworkd virtnodedevd virtnwfilterd virtproxyd virtqemud virtsecretd virtstoraged
  indirect        pcscd virtlockd virtlogd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=e0dc0bea-1e3d-46b6-a46e-ff6d03139702
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "ondemand" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
```

(Continued on next page)

Platform Notes (Continued)

```
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/Benchmark/speccpu2017r
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/sda2      btrfs  717G   51G  666G   8% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:          FUJITSU
    Product:         PRIMERGY RX2450 M2
    Product Family: SERVER
    Serial:          xxxxxxxxxx

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
21. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    24x Samsung M321R4GA3BB6-CQKEG 32 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       FUJITSU // American Megatrends Inc.
   BIOS Version:      V5.0.0.27 R1.4.0 for D4129-A1x
   BIOS Date:         01/30/2024
   BIOS Revision:     1.4
   Firmware Revision: 2.42
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext

Fortran benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc400-flags.html
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Genoa-RevD.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc400-flags.xml
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Genoa-RevD.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-12 17:56:42-0400.
Report generated on 2025-05-13 15:11:29 by CPU2017 PS formatter v6716.
Originally published on 2024-04-09.