SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_int_base = 269

SPECrate®2017_int_peak = 277

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

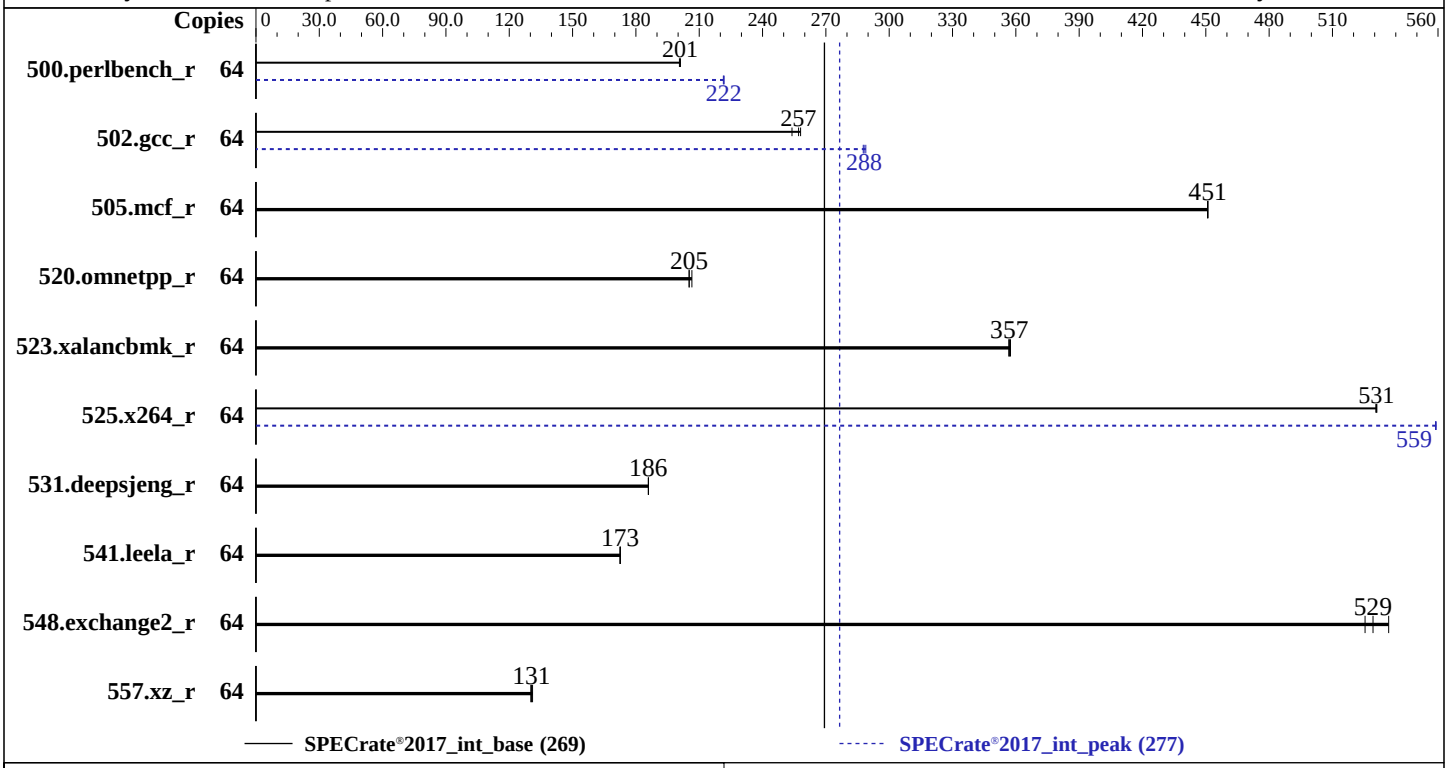

Hardware

CPU Name:	Intel Xeon Silver 4514Y
Max MHz:	3400
Nominal:	2000
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	30 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4400)
Storage:	1 x 960 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP5 5.14.21-150500.53-default
Compiler:	C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 04.24.01.10 released Mar-2024
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.00 GHz, Intel Xeon Silver 4514Y)

SPECrate®2017_int_base = 269

SPECrate®2017_int_peak = 277

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	508	201	**507**	**201**	507	201	64	460	221	459	222	**460**	**222**
502.gcc_r	64	351	258	**353**	**257**	357	254	64	315	288	314	289	**315**	**288**
505.mcf_r	64	**229**	**451**	229	451	229	451	64	**229**	**451**	229	451	229	451
520.omnetpp_r	64	407	207	**409**	**205**	409	205	64	407	207	**409**	**205**	409	205
523.xalancbmk_r	64	189	357	190	357	**189**	**357**	64	189	357	190	357	**189**	**357**
525.x264_r	64	211	531	211	531	**211**	**531**	64	**201**	**559**	201	559	200	559
531.deepsjeng_r	64	394	186	395	186	**394**	**186**	64	394	186	395	186	**394**	**186**
541.leela_r	64	615	172	614	173	**614**	**173**	64	615	172	614	173	**614**	**173**
548.exchange2_r	64	312	537	**317**	**529**	319	525	64	312	537	**317**	**529**	319	525
557.xz_r	64	527	131	**530**	**131**	531	130	64	527	131	**530**	**131**	531	130

SPECrate®2017_int_base = 269

SPECrate®2017_int_peak = 277

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec2017/lib/intel64:/home/spec2017/lib/ia32:/home/spec2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration:
ENERGY_PERF_BIAS_CFG mode = performance
Hardware Prefetcher = Disabled
Patrol Scrub = Disabled
Intel VT for Directed I/O (VT-d) = Disabled
SR-IOV Support = Disabled
Sub NUMA(SNC) = Enable SNC2

Sysinfo program /home/spec2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Apr 15 17:50:18 2024

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043/lp)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   17:50:18 up 2 min,  2 users,  load average: 0.30, 0.28, 0.11
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    198.168.111.123  17:48   10.00s  1.23s  0.00s /bin/sh
  ./reportable-ic2024.0.2-lin-sapphirerapids-rate-smt-on-20231213.sh
```

(Continued on next page)

Platform Notes (Continued)

```
  root     pts/1    198.168.111.123  17:48    1:35   0.06s  0.06s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4124773
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4124773
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root@pts/0
 -bash
 /bin/sh ./reportable-ic2024.0.2-lin-sapphirerapids-rate-smt-on-20231213.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
   ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=32 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
   ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=32 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.003/templogs/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/spec2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : INTEL(R) XEON(R) SILVER 4514Y
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 207
    stepping        : 2
    microcode       : 0x21000200
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 16
    siblings        : 32
    2 physical ids (chips)
    64 processors (hardware threads)
    physical id 0: core ids 0-15
    physical id 1: core ids 0-15
    physical id 0: apicids 0-31
    physical id 1: apicids 128-159
```

(Continued on next page)

Platform Notes (Continued)

```
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          64
  On-line CPU(s) list:             0-63
  Vendor ID:                       GenuineIntel
  Model name:                      INTEL(R) XEON(R) SILVER 4514Y
  CPU family:                      6
  Model:                           207
  Thread(s) per core:              2
  Core(s) per socket:              16
  Socket(s):                       2
  Stepping:                        2
  CPU max MHz:                     3400.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        4000.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                   sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                   lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                   invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                   vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                                   bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                   avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                   xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                   cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                                   hwp_act_window hwp_epp hwp_pkg_req hfi avx512vbmi umip pku ospke waitpkg
                                   avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                                   avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                   enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                   amx_tile flush_l1d arch_capabilities
  Virtualization:                  VT-x
  L1d cache:                       1.5 MiB (32 instances)
  L1i cache:                       1 MiB (32 instances)
  L2 cache:                        64 MiB (32 instances)
  L3 cache:                        60 MiB (2 instances)
  NUMA node(s):                    4
  NUMA node0 CPU(s):               0-7,32-39
  NUMA node1 CPU(s):               8-15,40-47
  NUMA node2 CPU(s):               16-23,48-55
  NUMA node3 CPU(s):               24-31,56-63
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Mmio stale data:   Not affected
  Vulnerability Retbleed:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Spectre v2:         Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
                                    sequence
  Vulnerability Srbds:              Not affected
  Vulnerability Tsx async abort:    Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     1.5M   12 Data            1    64        1             64
     L1i       32K       1M    8 Instruction     1    64        1             64
     L2         2M      64M   16 Unified         2  2048        1             64
     L3        30M      60M   15 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-7,32-39
  node 0 size: 257552 MB
  node 0 free: 256062 MB
  node 1 cpus: 8-15,40-47
  node 1 size: 258009 MB
  node 1 free: 256974 MB
  node 2 cpus: 16-23,48-55
  node 2 size: 258043 MB
  node 2 free: 256183 MB
  node 3 cpus: 24-31,56-63
  node 3 size: 257618 MB
  node 3 free: 256459 MB
  node distances:
  node   0   1   2   3
    0:  10  12  21  21
    1:  12  10  21  21
    2:  21  21  10  12
    3:  21  21  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1055973740 kB

------------------------------------------------------------
10. who -r
  run-level 3 Apr 15 17:48 last=5

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd
                  bluetooth cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings
                  kdump kdump-early klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd
                  sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
                  wpa_supplicant
  enabled-runtime systemd-remount-fs
  disabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs
                  autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates
                  chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq
```

(Continued on next page)

Platform Notes (Continued)

```
                  ebtables exchange-bmc-os-info gpm grub2-once haveged haveged-switch-root ipmi ipmievd
                  irqbindall issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs
                  nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon
                  serial-getty@ set_kthread_prio smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd
                  systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
                  wpa_supplicant@
  indirect        pcscd saned@ wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
  root=UUID=66f36b99-6e13-4e26-a963-3ca58607d8e9
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=404M,high
  crashkernel=72M,low

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               0
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP5

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/spec2017
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/sda3      btrfs  811G   30G  781G   4% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         ZTE
    Product:        R5300 G5
    Product Family: Server
    Serial:         219440501031

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends Inc.
   BIOS Version:      04.24.01.10
   BIOS Date:         03/13/2024
   BIOS Revision:     4.24
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LP64 -DSPEC_LINUX`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc`

C++ benchmarks:
`-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.0/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

523.xalancbmk_r: `basepeak = yes`

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `basepeak = yes`

Fortran benchmarks:

548.exchange2_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.2024-05-21.html`
`http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-EMR-V1.0.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.2024-05-21.xml`
`http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-EMR-V1.0.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-15 05:50:18-0400.
Report generated on 2024-05-21 19:21:22 by CPU2017 PS formatter v6716.
Originally published on 2024-05-21.