



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573


Test Date: Apr-2024

Test Sponsor: Dell Inc.

Hardware Availability: May-2024

Tested by: Dell Inc.

Software Availability: Dec-2023

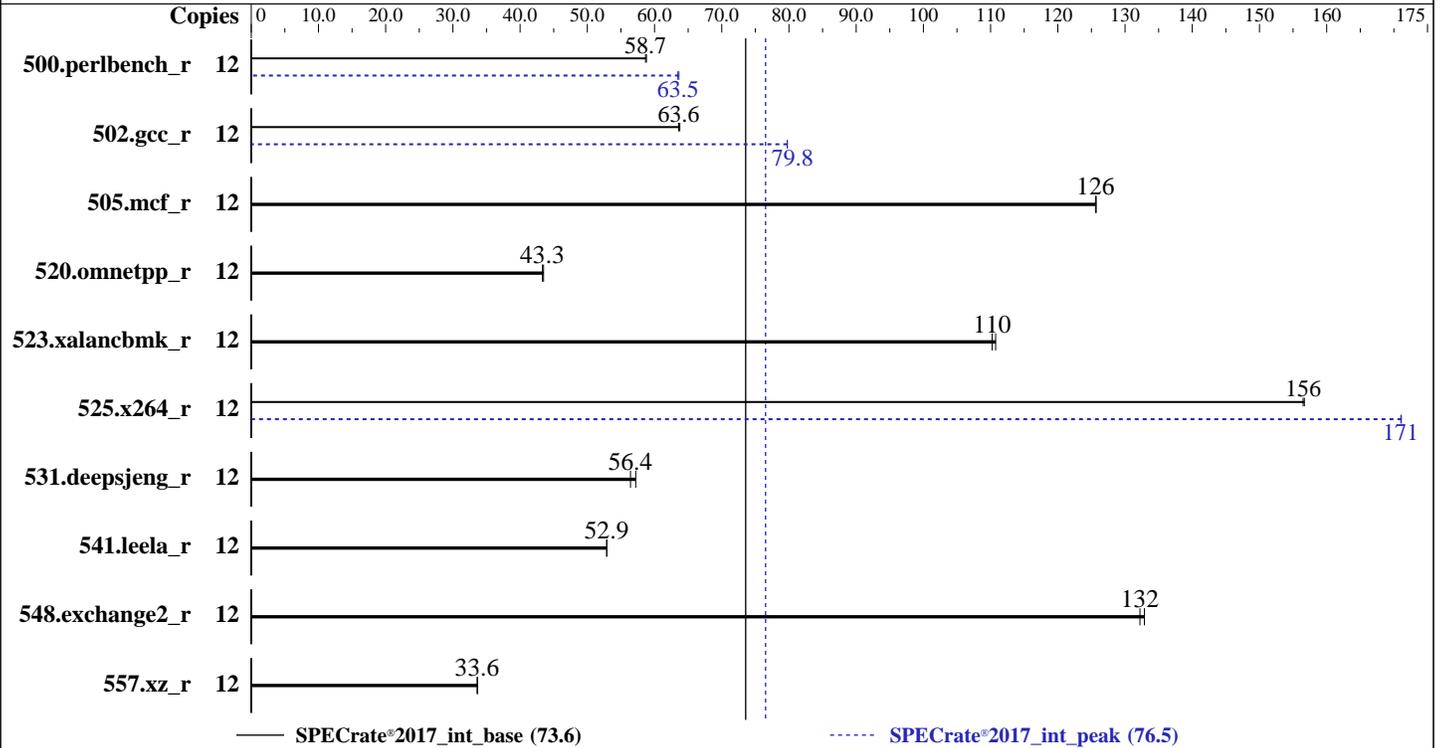

## Hardware

CPU Name: Intel Xeon E-2486  
 Max MHz: 5600  
 Nominal: 3500  
 Enabled: 6 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 18 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-4800B-E, running at 4400)  
 Storage: 40 GB on tmpfs  
 Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP5  
 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran  
 Compiler for Linux;  
 Parallel: No  
 Firmware: Version 1.2.2 released Mar-2024  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2024  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	12	325	58.8	<b><u>326</u></b>	<b><u>58.7</u></b>			12	<b><u>301</u></b>	<b><u>63.5</u></b>	300	63.6		
502.gcc_r	12	266	63.8	<b><u>267</u></b>	<b><u>63.6</u></b>			12	213	79.8	<b><u>213</u></b>	<b><u>79.8</u></b>		
505.mcf_r	12	154	126	<b><u>154</u></b>	<b><u>126</u></b>			12	154	126	<b><u>154</u></b>	<b><u>126</u></b>		
520.omnetpp_r	12	362	43.5	<b><u>363</u></b>	<b><u>43.3</u></b>			12	362	43.5	<b><u>363</u></b>	<b><u>43.3</u></b>		
523.xalancbmk_r	12	<b><u>115</u></b>	<b><u>110</u></b>	114	111			12	<b><u>115</u></b>	<b><u>110</u></b>	114	111		
525.x264_r	12	<b><u>134</u></b>	<b><u>156</u></b>	134	157			12	123	171	<b><u>123</u></b>	<b><u>171</u></b>		
531.deepsjeng_r	12	240	57.2	<b><u>244</u></b>	<b><u>56.4</u></b>			12	240	57.2	<b><u>244</u></b>	<b><u>56.4</u></b>		
541.leela_r	12	<b><u>376</u></b>	<b><u>52.9</u></b>	376	52.9			12	<b><u>376</u></b>	<b><u>52.9</u></b>	376	52.9		
548.exchange2_r	12	237	133	<b><u>238</u></b>	<b><u>132</u></b>			12	237	133	<b><u>238</u></b>	<b><u>132</u></b>		
557.xz_r	12	<b><u>386</u></b>	<b><u>33.6</u></b>	385	33.7			12	<b><u>386</u></b>	<b><u>33.6</u></b>	385	33.7		

SPECrate®2017\_int\_base = 73.6

SPECrate®2017\_int\_peak = 76.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/mnt
/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-32"
MALLOCONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 40 GB ramdisk created with the cmd: "mount -t tmpfs -o size=40G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

DIMM Self Healing on  
Uncorrectable Memory Error : Disabled

Virtualization Technology : Disabled  
LLC Prefetch : Disabled  
Dead Line LLC Alloc : Disabled

System Profile : Custom  
CPU Power Management : Maximum Performance  
C1E : Disabled  
C States : Autonomous  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Mon Apr 8 10:41:22 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2024  
Software Availability: Dec-2023

## Platform Notes (Continued)

Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043/lp)  
x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
10:41:22 up 44 min, 1 user, load average: 1.67, 4.28, 3.75  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root pts/0 192.168.141.50 09:57 26.00s 0.69s 0.00s /bin/bash ./dell-run-speccpu.sh rate  
--define DL-BIOSinc=Dell-BIOS\_Xeon-4E.inc --define DL-BIOS-LogProc=1 --define DL-VERS=4.9.2 --output\_format  
html,pdf,txt --define DL-LQC=1

3. Username  
From environment variable \$USER: root

4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 254888  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 254888  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root@pts/0  
-bash  
/bin/bash ./DELL\_rate.sh  
/bin/bash ./dell-run-main.sh rate  
/bin/bash ./dell-run-main.sh rate  
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS\_Xeon-4E.inc --define DL-BIOS-LogProc=1  
--define DL-VERS=4.9.2 --output\_format html,pdf,txt --define DL-LQC=1  
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS\_Xeon-4E.inc --define DL-BIOS-LogProc=1  
--define DL-VERS=4.9.2 --output\_format html,pdf,txt --define DL-LQC=1  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 -c  
ic2023.2.3-lin-core-avx2-rate-20231121.cfg --define smt-on --define cores=6 --define physicallogical  
--define no- numa --tune base,peak -o all --define drop\_caches --iterations 2 --define  
DL-BIOSinc=Dell-BIOS\_Xeon-4E.inc --define DL-BIOS-LogProc=1 --define DL-VERS=4.9.2 --output\_format  
html,pdf,txt --define DL-LQC=1 intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=12 --configfile  
ic2023.2.3-lin-core-avx2-rate-20231121.cfg --define smt-on --define cores=6 --define physicallogical  
--define no- numa --tune base,peak --output\_format all --define drop\_caches --iterations 2 --define  
DL-BIOSinc=Dell-BIOS\_Xeon-4E.inc --define DL-BIOS-LogProc=1 --define DL-VERS=4.9.2 --output\_format  
html,pdf,txt --define DL-LQC=1 --nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv  
--note-preenv --logfile \$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0  
--from\_runcpu 2  
specperl \$SPEC/bin/sysinfo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2024  
Software Availability: Dec-2023

## Platform Notes (Continued)

\$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) E E-2486
vendor_id       : GenuineIntel
cpu family      : 6
model           : 183
stepping        : 1
microcode       : 0x121
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 6
siblings        : 12
1 physical ids (chips)
12 processors (hardware threads)
physical id 0: core ids 0-5
physical id 0: apicids 0-11
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         42 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                12
On-line CPU(s) list:   0-11
Vendor ID:             GenuineIntel
Model name:            Intel(R) Xeon(R) E E-2486
CPU family:            6
Model:                 183
Thread(s) per core:    2
Core(s) per socket:    6
Socket(s):             1
Stepping:              1
BogoMIPS:              6988.80
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic
                        movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                        3dnowprefetch cpuid_fault invpcid_single ssbd ibrs ibpb stibp
                        ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed
                        adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
                        split_lock_detect avx_vnni dtherm ida arat pln pts hfi umip pku ospke
                        waitpkg gfni vaes vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear
                        serialize_pconfig arch_lbr flush_l1d arch_capabilities

L1d cache:             288 KiB (6 instances)
L1i cache:             192 KiB (6 instances)
L2 cache:              12 MiB (6 instances)
L3 cache:              18 MiB (1 instance)
NUMA node(s):         1
NUMA node0 CPU(s):    0-11
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2024  
Software Availability: Dec-2023

## Platform Notes (Continued)

Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW sequence  
Vulnerability Srbds: Not affected  
Vulnerability Txs async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	288K	12	Data	1	64	1	64
L1i	32K	192K	8	Instruction	1	64	1	64
L2	2M	12M	16	Unified	2	2048	1	64
L3	18M	18M	9	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)  
node 0 cpus: 0-11  
node 0 size: 63756 MB  
node 0 free: 54415 MB  
node distances:  
node 0  
0: 10

9. /proc/meminfo

MemTotal: 65286804 kB

10. who -r

run-level 3 Apr 8 09:57

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog sapconf smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant xrdp systemd-remount-fs
enabled-runtime	
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofsd autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info firewalld gpm grub2-once haveged haveged-switch-root hwloc-dump-hwdata ipmi ipmievd irqbindall issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap nmb nvme-autoconnect openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon saprouter saptune serial-getty@ set_kthread_prio smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd svnservice sysstat systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

indirect wpa\_supplicant@ xrdp-sesman  
pcsd saned@ uuidd wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=/dev/mapper/system-root  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=308M,high  
crashkernel=72M,low  
-----

14. cpupower frequency-info  
analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes  
-----

15. sysctl  
kernel.numa\_balancing 0  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 314572800  
vm.dirty\_background\_ratio 0  
vm.dirty\_bytes 629145600  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 0  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0  
-----

16. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force  
-----

17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2024  
Software Availability: Dec-2023

## Platform Notes (Continued)

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5  
-----

-----  
19. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 40G 4.1G 36G 11% /mnt/ramdisk  
-----

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge R260  
Product Family: PowerEdge  
Serial: 1234567  
-----

-----  
21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
2x 00AD00001201 HMC88AE8A081N 32 GB 2 rank 4800, configured at 4400  
-----

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 1.2.2  
BIOS Date: 03/21/2024  
BIOS Revision: 1.2  
-----

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

```

=====
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
          | 557.xz_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
          | 541.leela_r(base, peak)
=====

```

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran   | 548.exchange2_r(base, peak)
=====

```

```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2024  
Software Availability: Dec-2023

## Peak Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 73.6

PowerEdge R260 (Intel Xeon E-2486)

SPECrate®2017\_int\_peak = 76.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2024

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-08 06:41:22-0400.

Report generated on 2024-06-03 08:33:08 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-01.