



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

CPU2017 License: 5416


Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

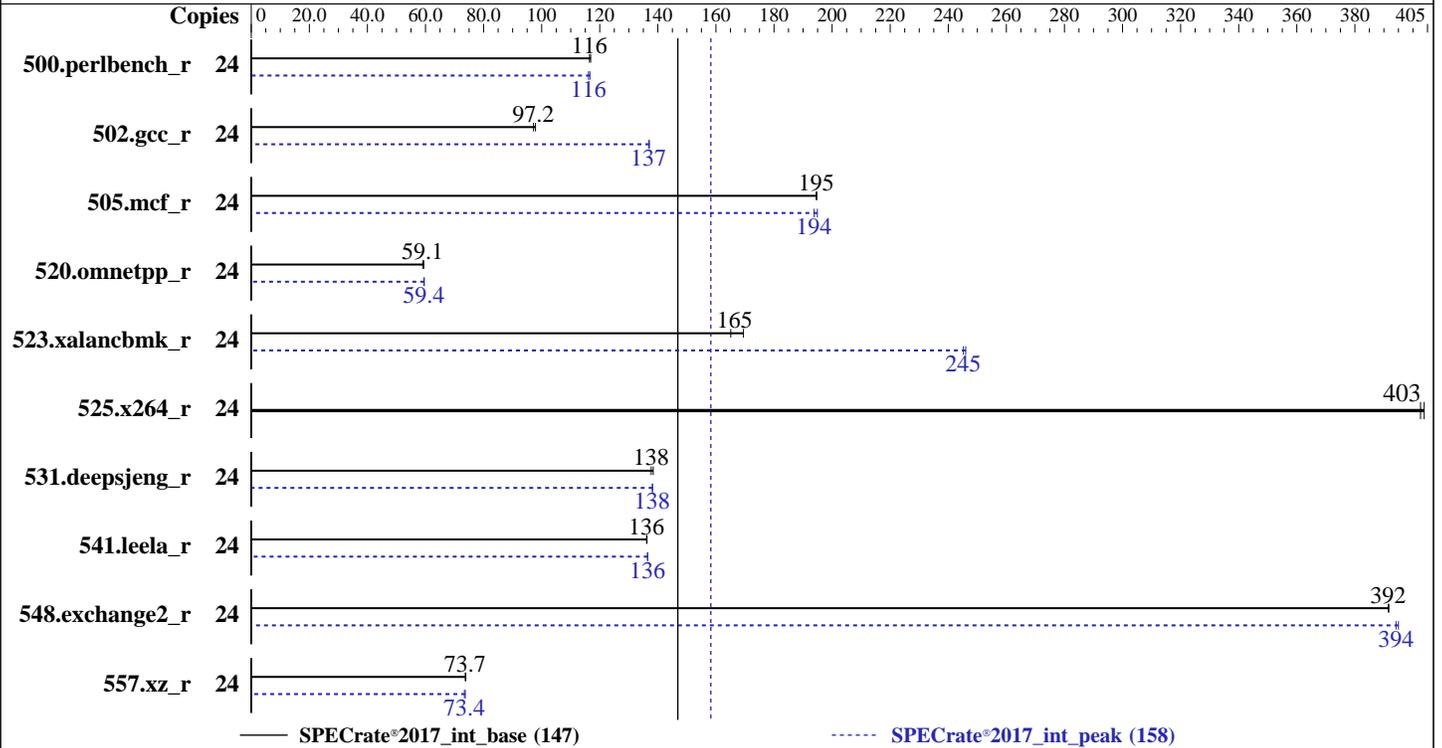

### Hardware

CPU Name: AMD EPYC 4464P  
 Max MHz: 5600  
 Nominal: 4700  
 Enabled: 12 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 32 MB shared / 6 cores  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5200B-R)

Storage: 1 x 960 GB NVMe M.2  
 Other: CPU Cooling: Air

### Software

OS: Ubuntu 22.04.4 LTS  
 kernel version 5.15.0-102-generic  
 C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: BIOS version 10.14 released Feb-2024  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	24	327	117	<b>328</b>	<b>116</b>			24	<b>329</b>	<b>116</b>	328	117		
502.gcc_r	24	347	97.9	<b>350</b>	<b>97.2</b>			24	248	137	<b>248</b>	<b>137</b>		
505.mcf_r	24	199	195	<b>199</b>	<b>195</b>			24	199	195	<b>200</b>	<b>194</b>		
520.omnetpp_r	24	530	59.4	<b>533</b>	<b>59.1</b>			24	<b>530</b>	<b>59.4</b>	528	59.6		
523.xalancbmk_r	24	150	169	<b>154</b>	<b>165</b>			24	103	246	<b>103</b>	<b>245</b>		
525.x264_r	24	<b>104</b>	<b>403</b>	104	404			24	<b>104</b>	<b>403</b>	104	404		
531.deepsjeng_r	24	<b>200</b>	<b>138</b>	199	138			24	<b>199</b>	<b>138</b>	199	138		
541.leela_r	24	<b>292</b>	<b>136</b>	292	136			24	<b>291</b>	<b>136</b>	291	137		
548.exchange2_r	24	161	392	<b>161</b>	<b>392</b>			24	<b>160</b>	<b>394</b>	159	395		
557.xz_r	24	<b>352</b>	<b>73.7</b>	351	73.9			24	352	73.7	<b>353</b>	<b>73.4</b>		

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/asrr/A1/amd_rate_aocc400_znver4_A_lib/lib:/home/asrr/A1/amd_rate_aocc400_znver4_A_lib/lib32:"
MALLOCONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOCONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS settings :

Precision Boost Overdrive : Enabled

Sysinfo program /home/asrr/A1/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on asrr Thu Apr 18 03:07:18 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. sysctl
  16. /sys/kernel/mm/transparent\_hugepage
  17. /sys/kernel/mm/transparent\_hugepage/khugepaged
  18. OS release
  19. Disk information
  20. /sys/devices/virtual/dmi/id
  21. dmidecode
  22. BIOS
- 

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

## Platform Notes (Continued)

-----  
1. `uname -a`  
Linux asrr 5.15.0-102-generic #112-Ubuntu SMP Tue Mar 5 16:50:32 UTC 2024 x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
2. `w`  
03:07:18 up 0 min, 2 users, load average: 0.17, 0.06, 0.02  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
asrr tty1 - 03:06 6.00s 0.12s 0.02s -bash  
asrr pts/0 - 03:07 5.00s 0.66s 0.08s sudo ./asrr\_run.sh

-----  
3. Username  
From environment variable \$USER: root  
From the command 'logname': asrr

-----  
4. `ulimit -a`  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 253569  
nofiles 1024  
vmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

-----  
5. `sysinfo process ancestry`  
/sbin/init  
/bin/login -p --  
-bash  
sudo ./asrr\_run.sh  
sudo ./asrr\_run.sh  
sh ./asrr\_run.sh  
python3 ./run\_amd\_rate\_aocc400\_znver4\_A1.py  
/bin/bash ./amd\_rate\_aocc400\_znver4\_A1.sh  
runcpu --config amd\_rate\_aocc400\_znver4\_A1.cfg --tune all --reportable --iterations 1 intrate  
runcpu --configfile amd\_rate\_aocc400\_znver4\_A1.cfg --tune all --reportable --iterations 1 --nopower  
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.001/templots/preenv.intrate.001.0.log --lognum 001.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/asrr/A1

-----  
6. `/proc/cpuinfo`  
model name : AMD EPYC 4464P 12-Core Processor  
vendor\_id : AuthenticAMD  
cpu family : 25  
model : 97  
stepping : 2  
microcode : 0xa601206  
bugs : sysret\_ss\_attrs spectre\_v1 spectre\_v2 spec\_store\_bypass srso  
TLB size : 3584 4K pages  
cpu cores : 12

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

## Platform Notes (Continued)

```
siblings          : 24
1 physical ids (chips)
24 processors (hardware threads)
physical id 0: core ids 0-5,8-13
physical id 0: apicids 0-11,16-27
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         48 bits physical, 48 bits virtual
Byte Order:            Little Endian
CPU(s):                24
On-line CPU(s) list:   0-23
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 4464P 12-Core Processor
CPU family:            25
Model:                 97
Thread(s) per core:    2
Core(s) per socket:    12
Socket(s):             1
Stepping:              2
Frequency boost:       enabled
CPU max MHz:           5481.3472
CPU min MHz:           3000.0000
BogoMIPS:              7399.72
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                        lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                        rapl pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt
                        aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm
                        sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd cppc arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl
                        avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                        avx512_bitalg avx512_vpopcntdq rdpid overflow_recov succor smca fsrm
                        flush_lld

Virtualization:        AMD-V
L1d cache:             384 KiB (12 instances)
L1i cache:             384 KiB (12 instances)
L2 cache:              12 MiB (12 instances)
L3 cache:              64 MiB (2 instances)
NUMA node(s):         1
NUMA node0 CPU(s):    0-23
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:      Not affected
Vulnerability L1tf:               Not affected
Vulnerability Mds:                Not affected
Vulnerability Meltdown:           Not affected
Vulnerability Mmio stale data:     Not affected
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

### Platform Notes (Continued)

Vulnerability Retbleed: Not affected  
 Vulnerability Spec rstack overflow: Mitigation; safe RET  
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp  
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization  
 Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP always-on, RSB filling, PBRB-eIBRS Not affected  
 Vulnerability Srbds: Not affected  
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	384K	8	Data	1	64	1	64
L1i	32K	384K	8	Instruction	1	64	1	64
L2	1M	12M	8	Unified	2	2048	1	64
L3	32M	64M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0-23
node 0 size: 63505 MB
node 0 free: 62740 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

MemTotal: 65029732 kB

10. who -r

run-level 5 Apr 18 03:06

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

```
Default Target Status
graphical running
```

12. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent
multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower
generated apport openipmi
indirect uidd
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
x11-common
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

### Platform Notes (Continued)

13. Linux kernel boot-time arguments, from /proc/cmdline  
 BOOT\_IMAGE=/vmlinuz-5.15.0-102-generic  
 root=UUID=d47cad3b-93a2-4ee6-9b75-5cb5f72fe94c  
 ro

-----  
 14. cpupower frequency-info  
 analyzing CPU 0:  
 current policy: frequency should be within 3.00 GHz and 3.70 GHz.  
                   The governor "performance" may decide which speed to use  
                   within this range.  
 boost state support:  
 Supported: yes  
 Active: yes  
 Boost States: 0  
 Total States: 2  
 Pstate-P0: 3700MHz

-----  
 15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

-----  
 16. /sys/kernel/mm/transparent\_hugepage  
 defrag [always] defer+madvise madvise never  
 enabled [always] madvise never  
 hpage\_pmd\_size 2097152  
 shmem\_enabled always within\_size advise [never] deny force

-----  
 17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
 alloc\_sleep\_millisecs 60000  
 defrag 1  
 max\_ptes\_none 511  
 max\_ptes\_shared 256  
 max\_ptes\_swap 64  
 pages\_to\_scan 4096  
 scan\_sleep\_millisecs 10000

-----  
 18. OS release  
 From /etc/\*-release /etc/\*-version

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

**CPU2017 License:** 5416  
**Test Sponsor:** ASRock Rack Inc.  
**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024  
**Hardware Availability:** Jun-2023  
**Software Availability:** Apr-2024

### Platform Notes (Continued)

os-release Ubuntu 22.04.4 LTS

-----  
**19. Disk information**

SPEC is set to: /home/asrr/A1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p4 ext4 874G 12G 818G 2% /

-----  
**20. /sys/devices/virtual/dmi/id**

Vendor: AsrockRack  
Product: 1U4LW-B650/2L2T RPSU

-----  
**21. dmidecode**

Additional information from dmidecode 3.3 follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
2x Unknown CT32G52C42U5.M16G1 32 GB 2 rank 5200  
2x Unknown Unknown

-----  
**22. BIOS**

(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 10.14  
BIOS Date: 02/05/2024  
BIOS Revision: 5.32

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
C | 502.gcc\_r(peak)

-----  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## ASRock Rack Inc.

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

### Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 548.exchange2\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASRock Rack Inc.**

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdallic
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASRock Rack Inc.**

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lamdalloc-ext

Fortran benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASRock Rack Inc.**

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

CPU2017 License: 5416

Test Sponsor: ASRock Rack Inc.

Tested by: ASRock Rack Inc.

Test Date: Apr-2024

Hardware Availability: Jun-2023

Software Availability: Apr-2024

## Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-faggressive-loop-transform -fvector-transform
-fscalar-transform -lamdlibm -lflang -lamdalloc
```

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

```
505.mcf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: Same as 505.mcf\_r

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASRock Rack Inc.**

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM
-ffast-math -finline-aggressive
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdalloc-ext
```

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**ASRock Rack Inc.**

1U4LW-B650/2L2T RPSU  
AMD EPYC 4464P

SPECrate®2017\_int\_base = 147

SPECrate®2017\_int\_peak = 158

**CPU2017 License:** 5416

**Test Sponsor:** ASRock Rack Inc.

**Tested by:** ASRock Rack Inc.

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2023

**Software Availability:** Apr-2024

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang -lamdalloc

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd\_rate\_aocc400\_znver4\_A\_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd\_rate\_aocc400\_znver4\_A\_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

[http://www.spec.org/cpu2017/flags/ASRockRack\\_platform\\_amd\\_rate\\_aocc400\\_znver4\\_A.html](http://www.spec.org/cpu2017/flags/ASRockRack_platform_amd_rate_aocc400_znver4_A.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

[http://www.spec.org/cpu2017/flags/ASRockRack\\_platform\\_amd\\_rate\\_aocc400\\_znver4\\_A.xml](http://www.spec.org/cpu2017/flags/ASRockRack_platform_amd_rate_aocc400_znver4_A.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-17 23:07:18-0400.

Report generated on 2024-06-14 19:18:43 by CPU2017 PDF formatter v6716.

Originally published on 2024-06-14.