



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2024

Hardware Availability: Aug-2024

Software Availability: Mar-2024

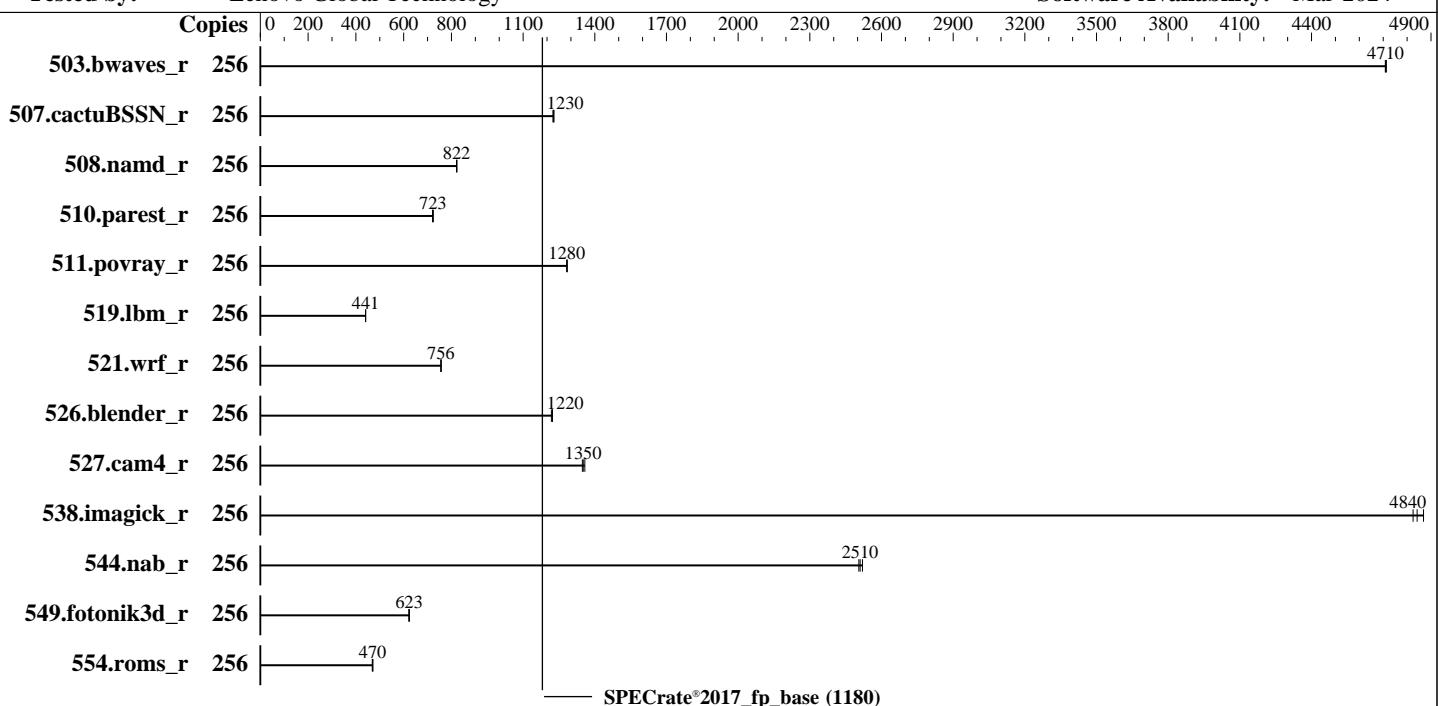

### Hardware

CPU Name: Intel Xeon Platinum 8593Q  
Max MHz: 3900  
Nominal: 2200  
Enabled: 128 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 320 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)  
Storage: 1 x 960 GB SATA SSD  
Other: CPU Cooling: CLC

### Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
Compiler: Kernel 5.14.0-284.11.1.el9\_2.x86\_64  
C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Lenovo BIOS Version ESE125H 3.20 released Jun-2024  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	545	4710	545	4710	<b>545</b>	<b>4710</b>							
507.cactusBSSN_r	256	264	1230	<b>264</b>	<b>1230</b>	265	1220							
508.namd_r	256	296	822	<b>296</b>	<b>822</b>	296	822							
510.parest_r	256	926	724	<b>927</b>	<b>723</b>	929	721							
511.povray_r	256	<b>466</b>	<b>1280</b>	466	1280	465	1280							
519.lbm_r	256	612	441	<b>612</b>	<b>441</b>	612	441							
521.wrf_r	256	758	756	<b>758</b>	<b>756</b>	758	757							
526.blender_r	256	<b>319</b>	<b>1220</b>	320	1220	319	1220							
527.cam4_r	256	<b>331</b>	<b>1350</b>	332	1350	330	1360							
538.imagick_r	256	<b>131</b>	<b>4840</b>	132	4830	131	4870							
544.nab_r	256	172	2510	<b>172</b>	<b>2510</b>	171	2520							
549.fotonik3d_r	256	<b>1601</b>	<b>623</b>	1605	622	1599	624							
554.roms_r	256	864	471	<b>865</b>	<b>470</b>	868	469							

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

SNC set to SNC2

LLC Prefetch set to Disabled

AMP Prefetch set to Enable

```
Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Jul  3 05:19:53 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

-----  
1. uname -a  
2. w  
3. Username  
4. ulimit -a  
5. sysinfo process ancestry  
6. /proc/cpuinfo  
7. lscpu  
8. numactl --hardware  
9. /proc/meminfo  
10. who -r  
11. Systemd service manager version: systemd 252 (252-13.el9\_2)  
12. Services, from systemctl list-unit-files  
13. Linux kernel boot-time arguments, from /proc/cmdline  
14. cpupower frequency-info  
15. tuned-adm active  
16. sysctl  
17. /sys/kernel/mm/transparent\_hugepage  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
19. OS release  
20. Disk information  
21. /sys/devices/virtual/dmi/id  
22. dmidecode  
23. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-284.11.1.el9\_2.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 12 10:45:03 EDT  
2023 x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
2. w  
05:19:53 up 2 min, 1 user, load average: 1.58, 1.46, 0.61

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2024

Hardware Availability: Aug-2024

Software Availability: Mar-2024

## Platform Notes (Continued)

```
USER      TTY      LOGIN@     IDLE     JCPU     PCPU WHAT
root      tty1      05:19    17.00s   0.91s   0.01s -bash
```

-----  
3. Username

```
From environment variable $USER: root
```

-----  
4. ulimit -a

```
real-time non-blocking time  (microseconds, -R) unlimited
core file size               (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority          (-e) 0
file size                     (blocks, -f) unlimited
pending signals               (-i) 4126816
max locked memory             (kbytes, -l) 64
max memory size               (kbytes, -m) unlimited
open files                    (-n) 1024
pipe size                     (512 bytes, -p) 8
POSIX message queues          (bytes, -q) 819200
real-time priority            (-r) 0
stack size                    (kbytes, -s) unlimited
cpu time                      (seconds, -t) unlimited
max user processes             (-u) 4126816
virtual memory                (kbytes, -v) unlimited
file locks                    (-x) unlimited
```

-----  
5. sysinfo process ancestry

```
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
  ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.031/templogs/preenv.fprate.031.0.log --lognum 031.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1
```

-----  
6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) PLATINUM 8593Q
vendor_id       : GenuineIntel
cpu family     : 6
model          : 207
stepping        : 2
microcode       : 0x21000240
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrp_brs
cpu cores       : 64
siblings        : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids 0-63
physical id 1: core ids 0-63
physical id 0: apicids 0-127
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

physical id 1: apicids 128-255

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 256
On-line CPU(s) list: 0-255
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: INTEL(R) XEON(R) PLATINUM 8593Q
BIOS Model name: INTEL(R) XEON(R) PLATINUM 8593Q
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 2
Stepping: 2
BogoMIPS: 4400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology
      nonstop_tsc cpuid aperfmpf tsc_known_freq pni pclmulqdq dtes64 monitor
      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtr pdcm pcid dca sse4_1
      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
     lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
      invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
      vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
      erms invpcid cq_m rdt_a avx512f avx512dq rdseed adx smap avx512ifma
      clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
      xgetbv1 xsaves cq_m_llc cq_m_occup_llc cq_m_mb_m_total cq_m_mb_m_local avx_vnni
      avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi avx512vbmi umip pkus
      ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
      avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
      enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr ibt amx_bf16
      avx512_fp16 amx_tile amx_int8 flush_ll1d arch_capabilities
Virtualization:
L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 256 MiB (128 instances)
L3 cache: 640 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-31,128-159
NUMA node1 CPU(s): 32-63,160-191
NUMA node2 CPU(s): 64-95,192-223
NUMA node3 CPU(s): 96-127,224-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

Vulnerability Spectre v2:

Mitigation: Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-31,128-159

node 0 size: 257697 MB

node 0 free: 256815 MB

node 1 cpus: 32-63,160-191

node 1 size: 258033 MB

node 1 free: 257253 MB

node 2 cpus: 64-95,192-223

node 2 size: 258033 MB

node 2 free: 257073 MB

node 3 cpus: 96-127,224-255

node 3 size: 257980 MB

node 3 free: 257180 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

-----  
9. /proc/meminfo

MemTotal: 1056508308 kB

-----  
10. who -r

run-level 3 Jul 3 05:18

-----  
11. Systemd service manager version: systemd 252 (252-13.el9\_2)

Default Target Status

multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth chrony cron daemon dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcolog mdmonitor microcode multipathd nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

```
dnf-system-upgrade iprdump iprinit iprupdate iscsid iscsiui0 kpatch kvm_stat ledmon
man-db-restart-cache-update nftables nvme-autoconnect pesign psacct rdisc rhcd rhsm
rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd3,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

-----
14. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

-----
15. tuned-adm active
Current active profile: throughput-performance

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
17. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Platform Notes (Continued)

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag 1
    max_ptes_none 511
    max_ptes_shared 256
    max_ptes_swap 64
    pages_to_scan 4096
    scan_sleep_millisecs 10000
```

```
-----  
19. OS release
  From /etc/*-release /etc/*-version
  os-release Red Hat Enterprise Linux 9.2 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
  system-release Red Hat Enterprise Linux release 9.2 (Plow)
```

```
-----  
20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs 819G 83G 736G 11% /home
```

```
-----  
21. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family: ThinkSystem
Serial: 1234567890
```

```
-----  
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 8x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600
 8x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600
```

```
-----  
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: ESE125H-3.20
BIOS Date: 06/25/2024
BIOS Revision: 3.20
Firmware Revision: 55.1
```

## Compiler Version Notes

```
=====
C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2024

Hardware Availability: Aug-2024

Software Availability: Mar-2024

## Compiler Version Notes (Continued)

C++ | 508.namd\_r(base) 510.parest\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray\_r(base) 526.blender\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactubssn\_r(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650 V3  
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017\_fp\_base = 1180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-03 05:19:52-0400.

Report generated on 2024-08-07 13:28:03 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-06.