



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2024

Hardware Availability: Aug-2024

Software Availability: Mar-2024

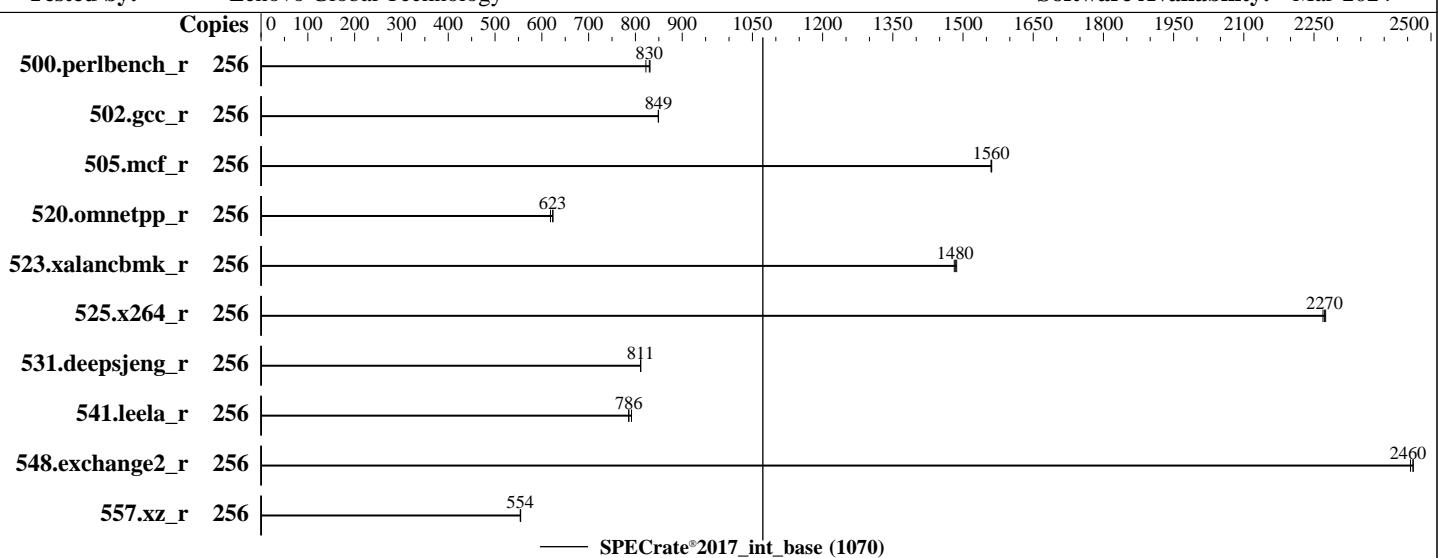

Hardware

CPU Name: Intel Xeon Platinum 8593Q
Max MHz: 3900
Nominal: 2200
Enabled: 128 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 320 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
Storage: 1 x 960 GB SATA SSD
Other: CPU Cooling: CLC

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
Compiler: Kernel 5.14.0-284.11.1.el9_2.x86_64
C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Lenovo BIOS Version ESE125H 3.20 released Jun-2024
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	256	490	831	496	822	491	830									
502.gcc_r	256	427	849	427	849	427	849									
505.mcf_r	256	265	1560	265	1560	265	1560									
520.omnetpp_r	256	538	624	539	623	543	618									
523.xalancbmk_r	256	183	1480	182	1480	182	1490									
525.x264_r	256	197	2270	198	2270	197	2270									
531.deepsjeng_r	256	362	811	362	811	362	811									
541.leela_r	256	536	792	540	786	539	786									
548.exchange2_r	256	272	2460	272	2460	273	2460									
557.xz_r	256	498	555	499	554	499	554									

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/lib/ia32:/home/cpu2017-1.1.9-ic
  2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

SNC set to SNC2

LLC Prefetch set to Disabled

UPI Link Disable set to Minimum Number of Links Enabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Tue Jul  2 04:27:27 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.el9_2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.el9_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
04:27:27 up 1 min, 1 user, load average: 3.12, 2.29, 0.92
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 04:26 12.00s 0.88s 0.01s -bash

3. Username

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2024

Hardware Availability: Aug-2024

Software Availability: Mar-2024

Platform Notes (Continued)

From environment variable \$USER: root

```
-----  
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4126816  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4126816  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited  
  
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31  
login -- root  
-bash  
-bash  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c  
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base -o all intrate  
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile  
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode  
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.024/templogs/preenv.intrate.024.0.log --lognum 024.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017-1.1.9-ic2024.1  
  
-----  
6. /proc/cpuinfo  
model name : INTEL(R) XEON(R) PLATINUM 8593Q  
vendor_id : GenuineIntel  
cpu family : 6  
model : 207  
stepping : 2  
microcode : 0x21000240  
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss  
cpu cores : 64  
siblings : 128  
2 physical ids (chips)  
256 processors (hardware threads)  
physical id 0: core ids 0-63  
physical id 1: core ids 0-63  
physical id 0: apicids 0-127  
physical id 1: apicids 128-255  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 256
On-line CPU(s) list: 0-255
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: INTEL(R) XEON(R) PLATINUM 8593Q
BIOS Model name: INTEL(R) XEON(R) PLATINUM 8593Q
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 2
Stepping: 2
BogoMIPS: 4400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
      clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
      nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor
      ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
      sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
     lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
      invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
      vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
      erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
      clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
      xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local avx_vnni
      avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi avx512vbm1 umip pku ospke
      waitpkg avx512_vbm2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
      avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
      enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
      avx512_fp16 amx_tile amx_int8 flush_ll1d arch_capabilities
Virtualization:
L1d cache: 6 MiB (128 instances)
L1i cache: 4 MiB (128 instances)
L2 cache: 256 MiB (128 instances)
L3 cache: 640 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-31,128-159
NUMA node1 CPU(s): 32-63,160-191
NUMA node2 CPU(s): 64-95,192-223
NUMA node3 CPU(s): 96-127,224-255
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	6M	12	Data	1	64	1	64
L1i	32K	4M	8	Instruction	1	64	1	64
L2	2M	256M	16	Unified	2	2048	1	64
L3	320M	640M	20	Unified	3	262144	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-31,128-159

node 0 size: 257658 MB

node 0 free: 256643 MB

node 1 cpus: 32-63,160-191

node 1 size: 258033 MB

node 1 free: 257257 MB

node 2 cpus: 64-95,192-223

node 2 size: 258033 MB

node 2 free: 257183 MB

node 3 cpus: 96-127,224-255

node 3 size: 258020 MB

node 3 free: 257223 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1056508304 kB

10. who -r
run-level 3 Jul 2 04:26

11. Systemd service manager version: systemd 252 (252-13.el9_2)

Default Target Status

multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvmeffc-boot-connections rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator tuned udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell dnf-system-upgrade iprdump iprinit iprupdate iscsid iscsiui0 kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvmf-autoconnect pesign psacct rdisc rhsm rhsm-facts rpmbuild rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemdpstore systemd-sysext
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2024

Hardware Availability: Aug-2024

Software Availability: Mar-2024

Platform Notes (Continued)

systemd-sysupdate-reboot

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
    BOOT_IMAGE=(hd3,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64  
    root=/dev/mapper/rhel-root  
    ro  
    resume=/dev/mapper/rhel-swap  
    rd.lvm.lv=rhel/root  
    rd.lvm.lv=rhel/swap  
    rhgb  
    quiet
```

```
-----  
14. cpupower frequency-info  
    analyzing CPU 0:  
      Unable to determine current policy  
      boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. tuned-adm active  
    Current active profile: throughput-performance
```

```
-----  
16. sysctl  
    kernel.numa_balancing          1  
    kernel.randomize_va_space       2  
    vm.compaction_proactiveness    20  
    vm.dirty_background_bytes      0  
    vm.dirty_background_ratio     10  
    vm.dirty_bytes                 0  
    vm.dirty_expire_centisecs     3000  
    vm.dirty_ratio                 40  
    vm.dirty_writeback_centisecs   500  
    vm.dirtytime_expire_seconds    43200  
    vm.extfrag_threshold           500  
    vm.min_unmapped_ratio          1  
    vm.nr_hugepages                0  
    vm.nr_hugepages_mempolicy      0  
    vm.nr_overcommit_hugepages     0  
    vm.swappiness                  10  
    vm.watermark_boost_factor      15000  
    vm.watermark_scale_factor       10  
    vm.zone_reclaim_mode           0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
    defrag           always defer defer+madvise [madvise] never  
    enabled          [always] madvise never  
    hpage_pmd_size  2097152  
    shmem_enabled   always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs  60000  
    defrag              1  
    max_ptes_none       511  
    max_ptes_shared     256
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

```
max_ptes_swap      64
pages_to_scan     4096
scan_sleep_millisecs 10000
```

```
-----  
19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.2 (Plow)
redhat-release Red Hat Enterprise Linux release 9.2 (Plow)
system-release Red Hat Enterprise Linux release 9.2 (Plow)
```

```
-----  
20. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
Filesystem          Type  Size  Used  Avail Use% Mounted on
/dev/mapper/rhel-home xfs   819G  83G  736G  11% /home
```

```
-----  
21. /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family: ThinkSystem
Serial:          1234567890
```

```
-----  
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 8x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600
 8x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600
```

```
-----  
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Lenovo
BIOS Version:     ESE125H-3.20
BIOS Date:        06/25/2024
BIOS Revision:    3.20
Firmware Revision: 55.1
```

Compiler Version Notes

```
=====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
-----

=====
C++    | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Compiler Version Notes (Continued)

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.20 GHz, Intel Xeon Platinum 8593Q)

SPECrate®2017_int_base = 1070

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -fno-  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-07-02 04:27:26-0400.

Report generated on 2024-08-07 13:27:41 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-06.