# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770 (Intel Xeon 6780E)

**SPECspeed®2017_fp_base = 315**

**SPECspeed®2017_fp_peak = 317**

**CPU2017 License:** 6573
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Aug-2024
**Hardware Availability:** Jul-2024
**Software Availability:** Jun-2024

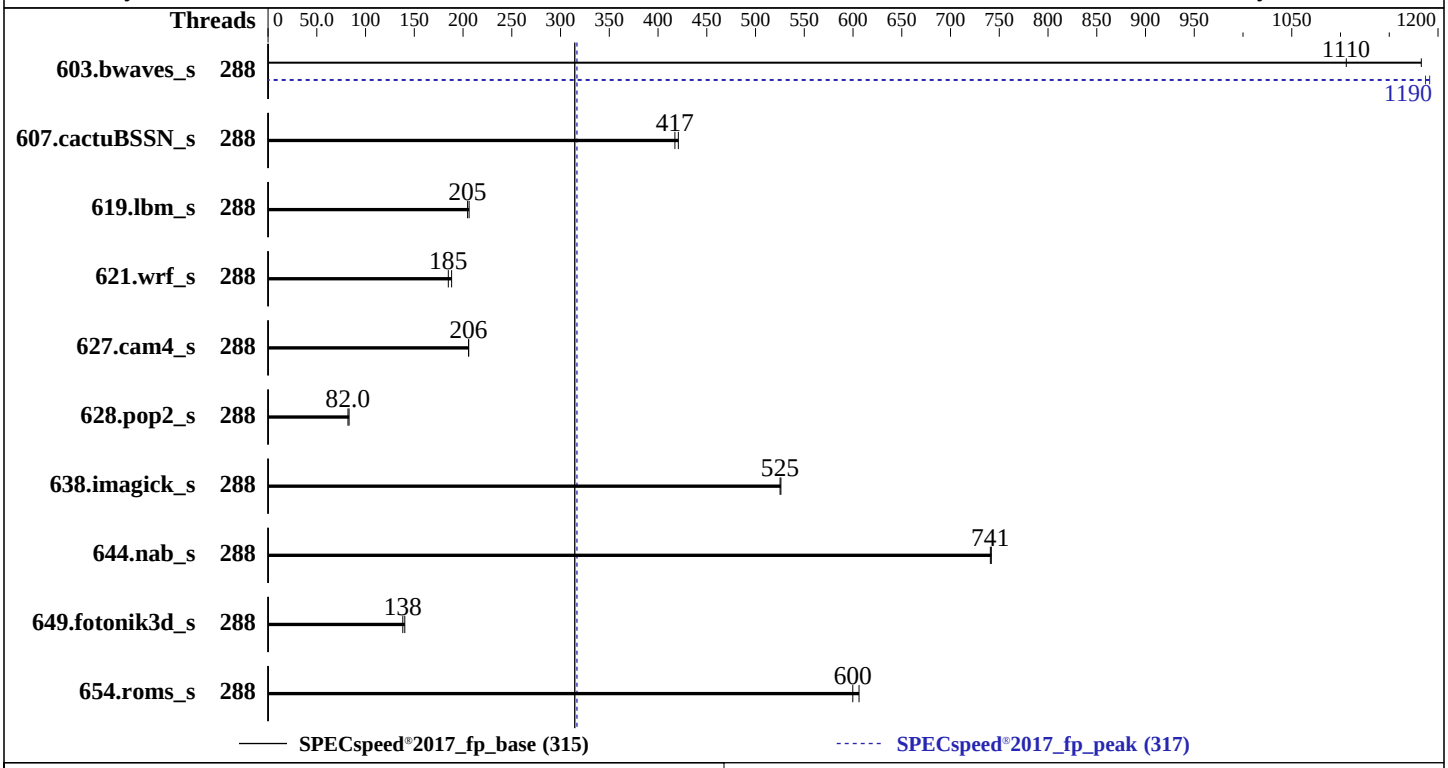


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon 6780E |
| Max MHz: | 3000 |
| Nominal: | 2200 |
| Enabled: | 288 cores, 2 chips |
| Orderable: | 1,2 chips |
| Cache L1: | 64 KB I + 32 KB D on chip per core |
| L2: | 4 MB I+D on chip per core |
| L3: | 108 MB I+D on chip per chip |
| Other: | None |
| Memory: | 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R) |
| Storage: | 150 GB on tmpfs |
| Other: | CPU Cooling: Air |

### Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default |
| Compiler: | C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux; |
| Parallel: | Yes |
| Firmware: | Version 1.0.1 released Jun-2024 |
| File System: | tmpfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS set to prefer performance at the cost of additional power usage. |

# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

## PowerEdge R770 (Intel Xeon 6780E)

SPECspeed®2017_fp_base = 315

SPECspeed®2017_fp_peak = 317

**CPU2017 License:** 6573
**Test Sponsor:** Dell Inc.
**Tested by:** Dell Inc.

**Test Date:** Aug-2024
**Hardware Availability:** Jul-2024
**Software Availability:** Jun-2024

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 288 | 49.9 | 1180 | **53.3** | **1110** | | | 288 | 49.5 | 1190 | **49.7** | **1190** | | |
| 607.cactuBSSN_s | 288 | **39.9** | **417** | 39.6 | 421 | | | 288 | **39.9** | **417** | 39.6 | 421 | | |
| 619.lbm_s | 288 | 25.4 | 206 | **25.6** | **205** | | | 288 | 25.4 | 206 | **25.6** | **205** | | |
| 621.wrf_s | 288 | 70.2 | 188 | **71.5** | **185** | | | 288 | 70.2 | 188 | **71.5** | **185** | | |
| 627.cam4_s | 288 | **43.1** | **206** | 43.1 | 206 | | | 288 | **43.1** | **206** | 43.1 | 206 | | |
| 628.pop2_s | 288 | **145** | **82.0** | 143 | 83.1 | | | 288 | **145** | **82.0** | 143 | 83.1 | | |
| 638.imagick_s | 288 | **27.5** | **525** | 27.4 | 526 | | | 288 | **27.5** | **525** | 27.4 | 526 | | |
| 644.nab_s | 288 | **23.6** | **741** | 23.6 | 742 | | | 288 | **23.6** | **741** | 23.6 | 742 | | |
| 649.fotonik3d_s | 288 | 65.0 | 140 | **66.0** | **138** | | | 288 | 65.0 | 140 | **66.0** | **138** | | |
| 654.roms_s | 288 | **26.3** | **600** | 26.0 | 606 | | | 288 | **26.3** | **600** | 26.0 | 606 | | |

**SPECspeed®2017_fp_base = 315**

**SPECspeed®2017_fp_peak = 317**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 150 GB ramdisk created with the cmd: "mount -t tmpfs -o size=150G tmpfs /mnt/ramdisk"
```

## Platform Notes

```
BIOS settings:
                  ADDDC Setting : Disabled
         DIMM Self Healing on
     Uncorrectable Memory Error : Disabled

        DCU Streamer Prefetcher : Enabled

                 System Profile : Custom
           CPU Power Management : Maximum Performance
         Energy Efficient Turbo : Disabled
                           C1E : Disabled
                    C States : Autonomous
       Energy Efficiency Policy : Performance
         CPU Interconnect Bus
          Link Power Management : Disabled
         PCI ASPM L1 Link
               Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on SLR7701-R770 Thu Aug  1 18:35:19 2024

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux SLR7701-R770 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   18:35:19 up  3:15,  1 user,  load average: 4.69, 6.04, 3.61
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                15:21    3:12m  1.59s  0.00s /bin/bash
  /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define
  DL-BIOS-adddcD=1 --define DL-VERS=5.3.3 --output_format html,pdf,txt

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 4126029
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 4126029
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 /bin/bash /home/DellFiles/bin/DELL_speed.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/dell-run-main.sh speed
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc
   --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.3 --output_format html,pdf,txt
 /bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc
   --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.3 --output_format html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=288 --tune base,peak -o all --define smt-on
   --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define DL-BIOS-adddcD=1
   --define DL-VERS=5.3.3 --output_format html,pdf,txt fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2024.1-lin-sierraforest-speed-20240308.cfg --define cores=288 --tune base,peak --output_format all
   --define smt-on --define drop_caches --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-7.inc --define
   DL-BIOS-adddcD=1 --define DL-VERS=5.3.3 --output_format html,pdf,txt --nopower --runmode speed --tune
   base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6780E
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 175
    stepping        : 3
```

(Continued on next page)

## Platform Notes (Continued)

```
     microcode       : 0x30001b3
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
     cpu cores       : 144
     siblings        : 144
     2 physical ids (chips)
     288 processors (hardware threads)
     physical id 0: core ids 0-143
     physical id 1: core ids 0-143
     physical id 0: apicids
     0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
     ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
     32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
     4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
     ,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
     physical id 1: apicids
     512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
     64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
     6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668
     ,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,
     722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766,768,770,772,7
     74,776,778,780,782,784,786,788,790,792,794,796,798
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 48 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               288
   On-line CPU(s) list:                  0-287
   Vendor ID:                            GenuineIntel
   BIOS Vendor ID:                       Intel
   Model name:                           Intel(R) Xeon(R) 6780E
   BIOS Model name:                      Intel(R) Xeon(R) 6780E  CPU @ 2.2GHz
   BIOS CPU family:                      179
   CPU family:                           6
   Model:                                175
   Thread(s) per core:                   1
   Core(s) per socket:                   144
   Socket(s):                            2
   Stepping:                             3
   BogoMIPS:                             4400.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                         nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                         pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                         xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                         tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                         3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                         ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                         vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                         rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
                                         xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                         split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm ida arat
                                         pln pts vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid
```

(Continued on next page)

## Platform Notes (Continued)

```
                                     bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                     serialize pconfig arch_lbr ibt flush_l1d arch_capabilities
  Virtualization:                    VT-x
  L1d cache:                         9 MiB (288 instances)
  L1i cache:                         18 MiB (288 instances)
  L2 cache:                          288 MiB (72 instances)
  L3 cache:                          216 MiB (2 instances)
  NUMA node(s):                      2
  NUMA node0 CPU(s):                 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48
                                     ,50,52,54,56,58,60,62,64,66,68,70,72,74,76,78,80,82,84,86,88,90,92,94
                                     ,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,13
                                     0,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164
                                     ,166,168,170,172,174,176,178,180,182,184,186,188,190,192,194,196,198,
                                     200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,2
                                     34,236,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,26
                                     8,270,272,274,276,278,280,282,284,286
  NUMA node1 CPU(s):                 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49
                                     ,51,53,55,57,59,61,63,65,67,69,71,73,75,77,79,81,83,85,87,89,91,93,95
                                     ,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,127,129,13
                                     1,133,135,137,139,141,143,145,147,149,151,153,155,157,159,161,163,165
                                     ,167,169,171,173,175,177,179,181,183,185,187,189,191,193,195,197,199,
                                     201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,2
                                     35,237,239,241,243,245,247,249,251,253,255,257,259,261,263,265,267,26
                                     9,271,273,275,277,279,281,283,285,287
  Vulnerability Gather data sampling: Not affected
  Vulnerability Itlb multihit:       Not affected
  Vulnerability L1tf:                Not affected
  Vulnerability Mds:                 Not affected
  Vulnerability Meltdown:            Not affected
  Vulnerability Mmio stale data:     Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:            Not affected
  Vulnerability Spec rstack overflow: Not affected
  Vulnerability Spec store bypass:   Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:          Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                     PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:               Not affected
  Vulnerability Tsx async abort:     Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       9M    8 Data            1     64        1             64
     L1i       64K      18M    8 Instruction     1    128        1             64
     L2         4M     288M   16 Unified         2   4096        1             64
     L3       108M     216M   12 Unified         3 147456        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus:
  0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72,7
  4,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,132,1
  34,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,
  188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236,238,240
  ,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
  node 0 size: 515550 MB
  node 0 free: 498688 MB
  node 1 cpus:
```

(Continued on next page)

## Platform Notes (Continued)

```
  1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63,65,67,69,71,73,7
  5,77,79,81,83,85,87,89,91,93,95,97,99,101,103,105,107,109,111,113,115,117,119,121,123,125,127,129,131,133,1
  35,137,139,141,143,145,147,149,151,153,155,157,159,161,163,165,167,169,171,173,175,177,179,181,183,185,187,
  189,191,193,195,197,199,201,203,205,207,209,211,213,215,217,219,221,223,225,227,229,231,233,235,237,239,241
  ,243,245,247,249,251,253,255,257,259,261,263,265,267,269,271,273,275,277,279,281,283,285,287
  node 1 size: 515982 MB
  node 1 free: 513855 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056290412 kB

------------------------------------------------------------
10. who -r
  run-level 3 Aug 1 15:20

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@
                   irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections
                   nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked
                   wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info fsidd
                   gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create
                   multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts
                   snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=0cea8829-6dd2-4356-b3f2-98e3b8b18a0d
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 226:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
```

(Continued on next page)

## Platform Notes (Continued)

```
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  150G   11G  140G   8% /mnt/ramdisk

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R770
    Product Family: PowerEdge
    Serial:         SLR7701

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
```

(Continued on next page)

## Platform Notes (Continued)

```
  "DMTF SMBIOS" standard.
  Memory:
    16x 00AD042300AD HMCG94AHBRA480N 64 GB 2 rank 6400


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.0.1
    BIOS Date:         06/20/2024
    BIOS Revision:     1.0
```

## Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
icx

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

## Peak Compiler Invocation

C benchmarks:
`icx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

## Peak Portability Flags

`Same as Base Portability Flags`

## Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `basepeak = yes`

644.nab_s: `basepeak = yes`

Fortran benchmarks:

**(Continued on next page)**

# Peak Optimization Flags (Continued)

603.bwaves_s: `-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsierraforest -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

649.fotonik3d_s: `basepeak = yes`

654.roms_s: `basepeak = yes`

Benchmarks using both Fortran and C:

621.wrf_s: `basepeak = yes`

627.cam4_s: `basepeak = yes`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at

`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.9.html`

You can also download the XML flags sources by saving the following links:

`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.9.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.9 on 2024-08-01 18:35:19-0400.
Report generated on 2024-08-29 10:51:25 by CPU2017 PS formatter v6716.
Originally published on 2024-08-27.