



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082


Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

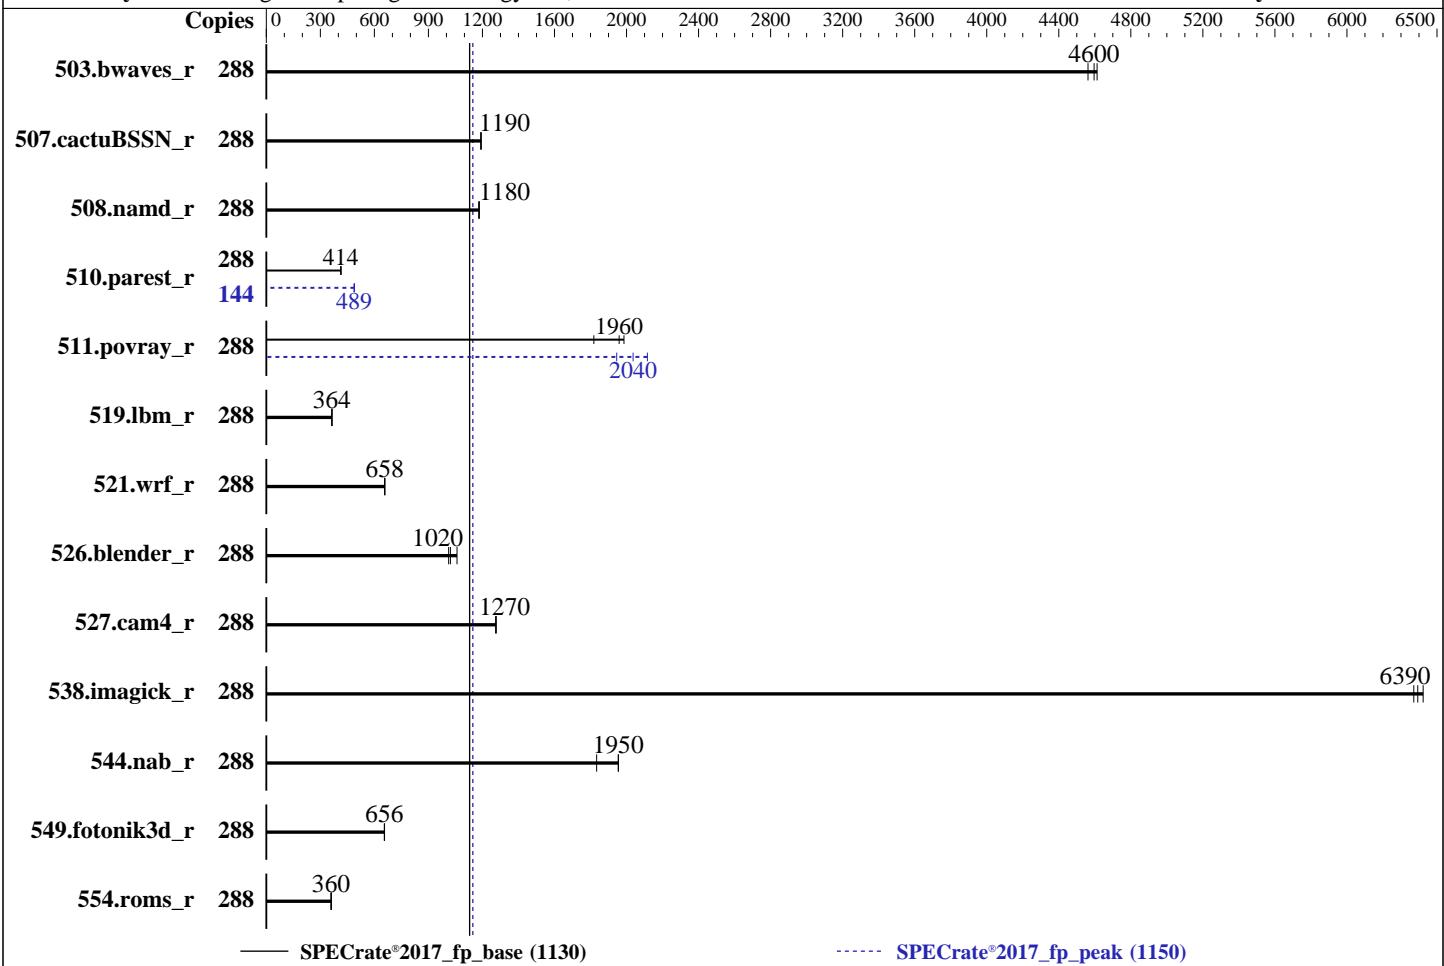

— SPECrate®2017_fp_base (1130)

----- SPECrate®2017_fp_peak (1150)

Hardware

CPU Name: Intel Xeon 6780E
 Max MHz: 3000
 Nominal: 2200
 Enabled: 288 cores, 2 chips
 Orderable: 1,2 chip(s)
 Cache L1: 64 KB I + 32 KB D on chip per core
 L2: 4 MB I+D on chip per core
 L3: 108 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
 Storage: 1 x 3.84 TB M.2 NVMe SSD
 Other: CPU Cooling: Air

OS:

SUSE Linux Enterprise Server 15 SP6
 6.4.0-150600.21-default

Compiler:

C/C++: Version 2024.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler
 for Linux;

Parallel:

No

Firmware:

Version F12 released Jul-2024

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.

Software



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	288	628	4600	633	4560	626	4610	288	628	4600	633	4560	626	4610
507.cactuBSSN_r	288	306	1190	306	1190	306	1190	288	306	1190	306	1190	306	1190
508.namd_r	288	232	1180	231	1180	232	1180	288	232	1180	231	1180	232	1180
510.parest_r	288	1819	414	1819	414	1821	414	144	771	489	770	489	773	487
511.povray_r	288	343	1960	339	1990	370	1820	288	330	2040	318	2120	346	1950
519.lbm_r	288	833	364	834	364	833	364	288	833	364	834	364	833	364
521.wrf_r	288	981	658	982	657	981	658	288	981	658	982	657	981	658
526.blender_r	288	433	1010	429	1020	414	1060	288	433	1010	429	1020	414	1060
527.cam4_r	288	395	1280	395	1270	395	1270	288	395	1280	395	1270	395	1270
538.imagick_r	288	112	6370	112	6420	112	6390	288	112	6370	112	6420	112	6390
544.nab_r	288	248	1950	248	1950	264	1830	288	248	1950	248	1950	264	1830
549.fotonik3d_r	288	1713	655	1711	656	1710	656	288	1713	655	1711	656	1710	656
554.roms_r	288	1272	360	1272	360	1269	361	288	1272	360	1272	360	1269	361

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2017/lib/intel64:/usr/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Power Policy Quick Setting set to Best Performance
Hardware P-States set to Native Mode
Hyper-Performance set to Maximum
Enforce DDR Memory Frequency POR set to Disable

Sysinfo program /usr/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Aug 26 20:33:43 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux

2. w
20:33:43 up 6:09, 2 users, load average: 164.47, 254.88, 272.58

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

Platform Notes (Continued)

USER	TTY	FROM	LOGIN@	IDLE	JCPU	PCPU	WHAT
root	tty1	-	14:26	6:06m	1.69s	0.07s	-bash
root	tty2	-	14:29	6:04m	0.02s	0.02s	-bash

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size	(blocks, -c)	unlimited
data seg size	(kbytes, -d)	unlimited
scheduling priority	(-e)	0
file size	(blocks, -f)	unlimited
pending signals	(-i)	4125944
max locked memory	(kbytes, -l)	8192
max memory size	(kbytes, -m)	unlimited
open files	(-n)	1024
pipe size	(512 bytes, -p)	8
POSIX message queues	(bytes, -q)	819200
real-time priority	(-r)	0
stack size	(kbytes, -s)	unlimited
cpu time	(seconds, -t)	unlimited
max user processes	(-u)	4125944
virtual memory	(kbytes, -v)	unlimited
file locks	(-x)	unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 -c
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcores=144 --define
  physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
  fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 --configfile
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcores=144 --define
  physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
  --output_format all --nopower --runmode rate --tune base:peak --size reffrate fprate --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /usr/cpu2017
```

6. /proc/cpuinfo

model name	:	Intel(R) Xeon(R) 6780E
vendor_id	:	GenuineIntel
cpu family	:	6
model	:	175
stepping	:	3
microcode	:	0x30001b3
bugs	:	spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores	:	144
siblings	:	144
2 physical ids (chips)		
288 processors (hardware threads)		
physical id 0: core ids 0-143		

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

Platform Notes (Continued)

```
physical id 1: core ids 0-143
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
physical id 1: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668
,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720
,722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766,768,770,772,7
74,776,778,780,782,784,786,788,790,792,794,796,798
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

```
From lscpu from util-linux 2.39.3:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 288
On-line CPU(s) list: 0-287
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6780E
BIOS Model name: Intel(R) Xeon(R) 6780E CPU @ 2.2GHz
BIOS CPU family: 179
CPU family: 6
Model: 175
Thread(s) per core: 1
Core(s) per socket: 144
Socket(s): 2
Stepping: 3
CPU(s) scaling MHz: 30%
CPU max MHz: 3000.0000
CPU min MHz: 800.0000
BogoMIPS: 4400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
nopl xtTopology nonstop_tsc cpuid aperf mperf tsc_known_freq pn
pcimulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbe fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
ssbd mba ibrs ibpb stibrs ibrs_enhanced tpr_shadow flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect user_shstck avx_vnni lam wbnoinvd dtherm ida arat
pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnumi umip pkru ospke
waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect cldemote
movdiri movdir64b enqcmd fsrm md_clear serialize pconfig arch_lbr ibt
flush_lld arch_capabilities
Virtualization: VT-x
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

Platform Notes (Continued)

L1d cache:	9 MiB (288 instances)
L1i cache:	18 MiB (288 instances)
L2 cache:	288 MiB (72 instances)
L3 cache:	216 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-143
NUMA node1 CPU(s):	144-287
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSB-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	9M	8	Data	1	64	1	64
L1i	64K	18M	8	Instruction	1	128	1	64
L2	4M	288M	16	Unified	2	4096	1	64
L3	108M	216M	12	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0-143
node 0 size: 515574 MB
node 0 free: 455598 MB
node 1 cpus: 144-287
node 1 size: 515940 MB
node 1 free: 461655 MB
node distances:
node 0 1
0: 10 21
1: 21 10

9. /proc/meminfo

MemTotal: 1056271256 kB

10. who -r
run-level 3 Aug 26 14:25

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

Platform Notes (Continued)

STATE	UNIT FILES
enabled	apparmor auditd cron getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections nvme-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation ebttables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmiev4 issue-add-ssh-keys kexec-load lunmask man-db-create multipathd munge nfs nfs-blkmap ntp-wait ntpd rpcbind rpmconfigcheck rsyncd salt-minion serial-getty@ slurmd smartd_generate_opts snmpd snmptrapd svntserve
indirect	systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 yppbind
	systemd-userdbd wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
 BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
 root=UUID=836db4a5-b0f9-4e62-a6dd-ee841593dbe7
 splash=silent
 resume=/dev/disk/by-uuid/65e61a90-e456-4848-87b7-33d7f0e490d3
 mitigations=auto
 quiet
 security=apparmor

14. cpupower frequency-info
 analyzing CPU 38:
 current policy: frequency should be within 800 MHz and 3.00 GHz.
 The governor "performance" may decide which speed to use
 within this range.
 boost state support:
 Supported: yes
 Active: yes

15. sysctl
 kernel.numa_balancing 0
 kernel.randomize_va_space 2
 vm.compaction_proactiveness 20
 vm.dirty_background_bytes 0
 vm.dirty_background_ratio 10
 vm.dirty_bytes 0
 vm.dirty_expire_centisecs 3000
 vm.dirty_ratio 40
 vm.dirty_writeback_centisecs 500
 vm.dirtytime_expire_seconds 43200
 vm.extfrag_threshold 500
 vm.min_unmapped_ratio 1
 vm.nr_hugepages 0
 vm.nr_hugepages_mempolicy 0
 vm.nr_overcommit_hugepages 0
 vm.swappiness 60
 vm.watermark_boost_factor 15000
 vm.watermark_scale_factor 10
 vm.zone_reclaim_mode 0

16. /sys/kernel/mm/transparent_hugepage
 defrag always defer defer+madvise [madvise] never
 enabled [always] madvise never

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

Platform Notes (Continued)

```
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs 60000  
defrag 1  
max_ptes_none 511  
max_ptes_shared 256  
max_ptes_swap 64  
pages_to_scan 4096  
scan_sleep_millisecs 10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----  
19. Disk information  
SPEC is set to: /usr/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p2 xfs 2.0T 160G 1.9T 8% /
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Giga Computing  
Product: R284-S92-AAJ1-000  
Product Family: Server  
Serial: 01234567890123456789AB
```

```
-----  
21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
16x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400
```

```
-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: GIGABYTE  
BIOS Version: F12  
BIOS Date: 07/10/2024  
BIOS Revision: 5.35
```

Compiler Version Notes

```
=====| 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)|=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

Compiler Version Notes (Continued)

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactubSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Sponsor: Giga Computing Technology Co., Ltd.

Tested by: Giga Computing Technology Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Aug-2024

Software Availability: Jul-2024

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

(Test Sponsor: Giga Computing Technology Co., Ltd.)

R284-S92-AAJ1

(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_fp_base = 1130

SPECrate®2017_fp_peak = 1150

CPU2017 License: 9082

Test Date: Aug-2024

Test Sponsor: Giga Computing Technology Co., Ltd.

Hardware Availability: Aug-2024

Tested by: Giga Computing Technology Co., Ltd.

Software Availability: Jul-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-SRF-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-SRF-rev1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-08-26 08:33:42-0400.

Report generated on 2024-09-25 09:14:57 by CPU2017 PDF formatter v6716.

Originally published on 2024-09-24.