SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V4
(2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_int_base =	1130
SPECrate®2017_int_energy_base =	1920
SPECrate®2017_int_peak =	Not Run
SPECrate®2017_int_energy_peak =	Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

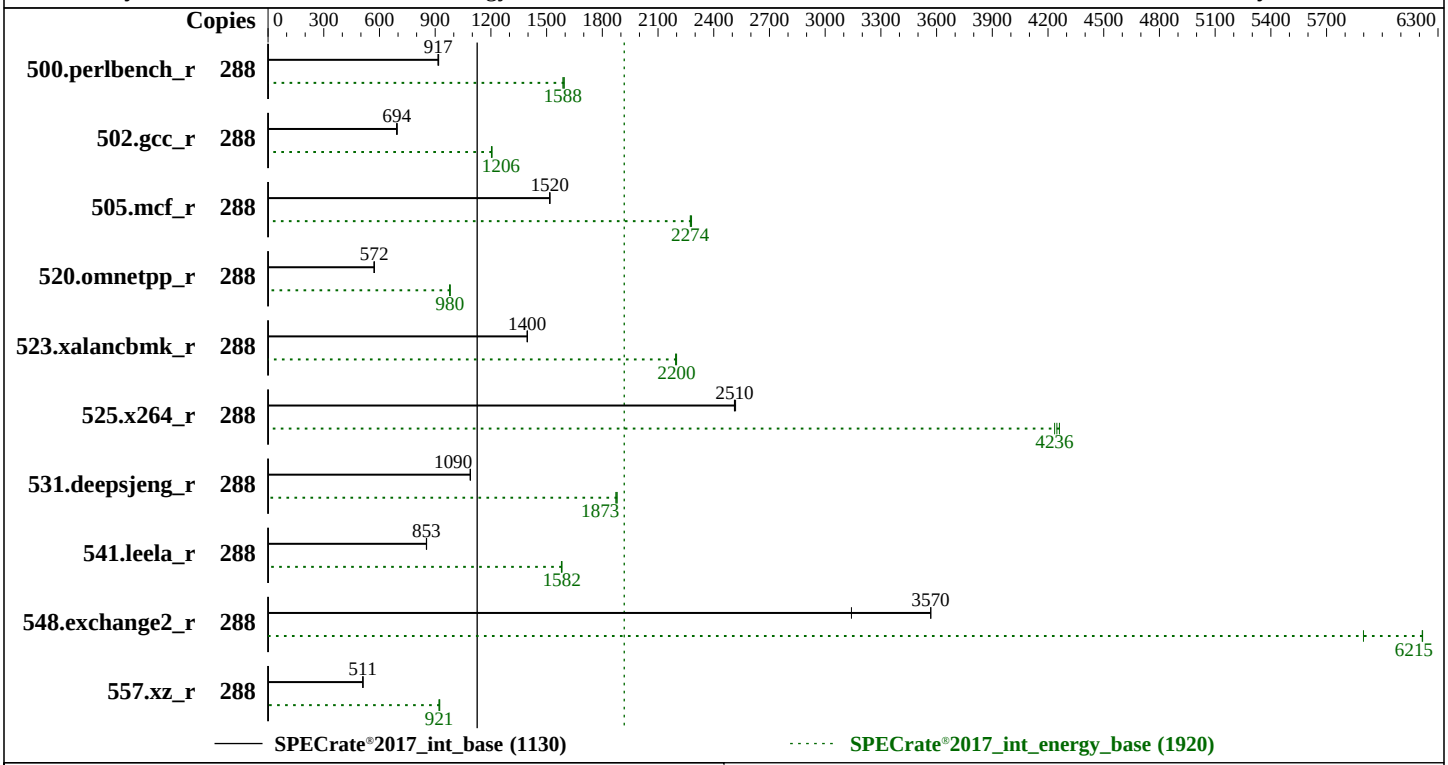

Hardware

CPU Name:	Intel Xeon 6780E
Max MHz:	3000
Nominal:	2200
Enabled:	288 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	4 MB I+D on chip per core
L3:	108 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)
Storage:	1 x 960GB NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.21-default
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Lenovo BIOS Version IHE103O 0.20 released Aug-2024
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	None
Power Management:	BIOS set to balance power and performance

Power

Max. Power (W):	771.5
Idle Power (W):	189.06
Min. Temperature (C):	20.63
Elevation (m):	43
Line Standard:	220 V / 50 Hz / 1 phase / 3 wires
Provisioning:	Line-powered

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V4 (2.20 GHz, Intel Xeon 6780E)

SPECrate®2017_int_base =	1130
SPECrate®2017_int_energy_base =	1920
SPECrate®2017_int_peak =	Not Run
SPECrate®2017_int_energy_peak =	Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2024
Hardware Availability: Nov-2024
Software Availability: Jun-2024

Power Settings

Management FW: Version 0.38 of IHX403L
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 2 x 1300 W (redundant)
Details: ThinkSystem V3 1300W 230V / 115V Titanium Power Supply 4P57A88621
Backplane: 10 x 2.5-inch HDD back plane
Other Storage: None
Storage Model #s: 4XB7A93066
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 10 / 25 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 10 Gb
Other HW Model #s: 4 x performance fan

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UG05013E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: GRG METROLOGY & TEST (BEIJING) CO., LTD.
Calibration Label: J202308266858A-0004
Calibration Date: 16-Oct-2023
PTDaemon® Version: 1.10.0 (82175bac; 2022-08-17)
Setup Description: Connected to PSU1
Current Ranges Used: 10A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W63181846
Input Connection: USB
PTDaemon Version: 1.10.0 (82175bac; 2022-08-17)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
500.perlbench_r	288	501	915	312	1590	623	738	499	919	312	1590	626	737	**500**	**917**	**313**	**1590**	**626**	**739**
502.gcc_r	288	589	692	368	1200	625	718	**587**	**694**	**367**	**1210**	**625**	**716**	587	695	368	1200	627	719
505.mcf_r	288	307	1520	224	2280	729	772	307	1520	223	2280	728	769	**307**	**1520**	**224**	**2270**	**730**	**765**
520.omnetpp_r	288	660	572	417	981	632	641	662	571	419	978	632	648	**661**	**572**	**418**	**980**	**632**	**642**
523.xalancbmk_r	288	**218**	**1400**	**150**	**2200**	**687**	**746**	218	1400	150	2200	689	750	218	1400	150	2200	688	745
525.x264_r	288	201	2510	128	4260	639	669	**201**	**2510**	**129**	**4240**	**643**	**682**	200	2520	129	4250	642	672
531.deepsjeng_r	288	303	1090	191	1880	630	686	**303**	**1090**	**192**	**1870**	**632**	**683**	303	1090	191	1880	630	684
541.leela_r	288	559	853	327	1580	584	625	559	854	326	1580	584	623	**559**	**853**	**326**	**1580**	**583**	**625**
548.exchange2_r	288	211	3570	132	6220	622	635	**211**	**3570**	**132**	**6220**	**622**	**635**	240	3140	139	5900	577	634
557.xz_r	288	**609**	**511**	**367**	**921**	**602**	**702**	609	511	367	921	603	701	609	510	366	925	600	699

SPECrate®2017_int_base = 1130

SPECrate®2017_int_energy_base = 1920

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/lib/ia32:/home/cpu2017-1.1.9-ic
     2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
 Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
 memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Workload Profile set to General Computing - Power Efficiency and then set it to Custom
Turbo Mode set to Disabled
UPI Link Disable set to Minimum Number Of Links Enabled
DCU Streamer Prefetcher set to Disabled

 Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Sun Sep  8 11:45:36 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
```

(Continued on next page)

Platform Notes (Continued)

```
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   11:45:36 up 1 day, 22:24,  1 user,  load average: 0.29, 0.06, 0.02
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    172.29.241.254   Fri13   48.00s  2.75s  0.04s sh
  Run702-compliant-ic2024.1-lin-sierraforest-rateint-base-20240308.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 2062205
  max locked memory       (kbytes, -l) 8192
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 2062205
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
```

(Continued on next page)

Platform Notes (Continued)

```
 -bash
 /bin/bash ./run_SR630V4.sh
 sh Run702-compliant-ic2024.1-lin-sierraforest-rateint-base-20240308.sh
 runcpu --power --nobuild --action validate --define default-platform-flags --define numcopies=288 -c
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=288 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --reportable --tune base -o all intrate
 runcpu --power --nobuild --action validate --define default-platform-flags --define numcopies=288
   --configfile ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=288 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base
   --output_format all --runmode rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.292/templogs/preenv.intrate.292.0.log --lognum 292.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6780E
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 175
    stepping        : 3
    microcode       : 0x3000211
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 144
    siblings        : 144
    2 physical ids (chips)
    288 processors (hardware threads)
    physical id 0: core ids 0-143
    physical id 1: core ids 0-143
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
    32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
    4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
    ,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
    physical id 1: apicids
    512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
    64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
    6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668
    ,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,
    722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766,768,770,772,7
    74,776,778,780,782,784,786,788,790,792,794,796,798
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 48 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               288
  On-line CPU(s) list:                  0-287
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel(R) Corporation
```

(Continued on next page)

Platform Notes (Continued)

```
  Model name:                           Intel(R) Xeon(R) 6780E
  BIOS Model name:                      Intel(R) Xeon(R) 6780E UNKNOWN CPU @ 2.2GHz
  BIOS CPU family:                      179
  CPU family:                           6
  Model:                                175
  Thread(s) per core:                   1
  Core(s) per socket:                   144
  Socket(s):                            2
  Stepping:                             3
  BogoMIPS:                             4400.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                        ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                        vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm
                                        rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec
                                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                        split_lock_detect user_shstk avx_vnni lam wbnoinvd dtherm arat pln
                                        pts vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid
                                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                        serialize pconfig arch_lbr ibt flush_l1d arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            9 MiB (288 instances)
  L1i cache:                            18 MiB (288 instances)
  L2 cache:                             288 MiB (72 instances)
  L3 cache:                             216 MiB (2 instances)
  NUMA node(s):                         2
  NUMA node0 CPU(s):                    0-143
  NUMA node1 CPU(s):                    144-287
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                        PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
      L1d       32K       9M    8 Data            1     64        1             64
      L1i       64K      18M    8 Instruction     1    128        1             64
      L2         4M     288M   16 Unified         2   4096        1             64
      L3       108M     216M   12 Unified         3 147456        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-143
  node 0 size: 257646 MB
  node 0 free: 255911 MB
  node 1 cpus: 144-287
  node 1 size: 257931 MB
  node 1 free: 255795 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527951760 kB

------------------------------------------------------------
10. who -r
  run-level 3 Sep 6 13:21

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE           UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                  kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix
                  purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4
                  wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime systemd-remount-fs
  disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                  firewalld fsidd gpm grub2-once haveged ipmi ipmievd issue-add-ssh-keys kexec-load lunmask
                  man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@
                  smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-confext
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
  generated       ntp_sync
  indirect        systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=8c76b9eb-7cab-4e58-a0ba-c4f6030335e5
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 197:
```

(Continued on next page)

Platform Notes (Continued)

```
    Unable to determine current policy
    boost state support:
      Supported: no
      Active: no

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p2 xfs   893G   76G  818G   9% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
```

(Continued on next page)

Platform Notes (Continued)

```
     Vendor:         Lenovo
     Product:        ThinkSystem SR630 V4
     Product Family: ThinkSystem
     Serial:         0987654321

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     11x Samsung M321R4GA3PB1-CCPPC 32 GB 2 rank 6400
     5x Samsung M321R4GA3PB1-CCPYC 32 GB 2 rank 6400


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:
    BIOS Version:      IHE103O-0.20
    BIOS Date:         08/01/2024
    BIOS Revision:     0.20
    Firmware Revision: 0.38
```

Compiler Version Notes

```
==============================================================================================================
C       | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)

Base Compiler Invocation (Continued)

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-A.html
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-A.xml
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-07 23:45:35-0400.
Report generated on 2024-09-25 09:18:17 by CPU2017 PS formatter v6716.
Originally published on 2024-09-24.