



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

**SPECrate®2017\_fp\_base = 2180**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 9050


Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

**Test Date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

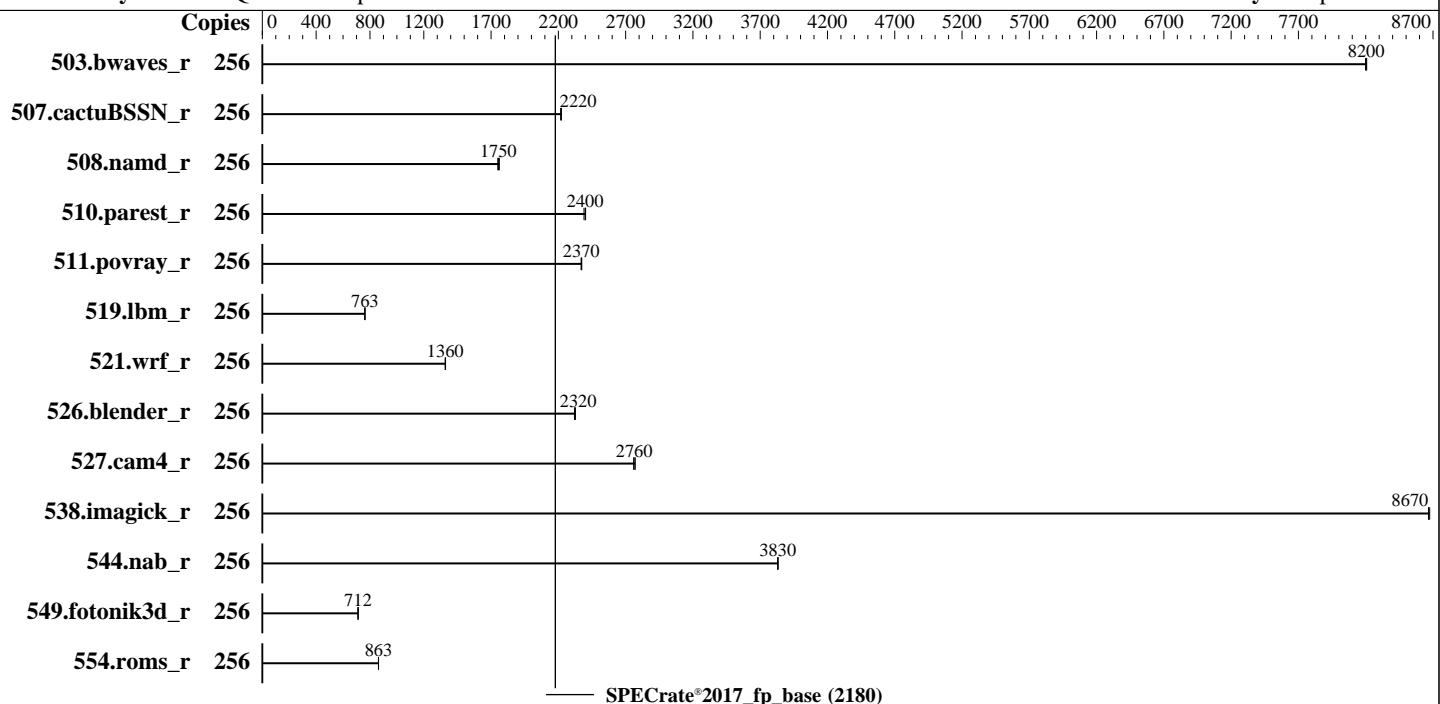

## Hardware

CPU Name: AMD EPYC 9755  
Max MHz: 4100  
Nominal: 2700  
Enabled: 256 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 512 MB I+D on chip per chip, 32 MB shared / 8 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)  
Storage: 1 x 1.92 TB NVMe SSD  
Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6  
Compiler: kernel 6.4.0-150600.21-default  
Parallel: C/C++/Fortran: Version 5.0.0 of AOCC  
Firmware: No  
File System: Version 3B02 released Sep-2024  
System State: btrfs  
Base Pointers: Run level 3 (multi-user)  
Peak Pointers: 64-bit  
Other: Not Applicable  
Power Management: Other: None  
BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

**SPECrate®2017\_fp\_base = 2180**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	313	8200	313	8210	<b>313</b>	<b>8200</b>							
507.cactusBSSN_r	256	146	2220	<b>146</b>	<b>2220</b>	146	2220							
508.namd_r	256	138	1760	139	1750	<b>139</b>	<b>1750</b>							
510.parest_r	256	279	2400	<b>279</b>	<b>2400</b>	280	2390							
511.povray_r	256	252	2370	252	2370	<b>252</b>	<b>2370</b>							
519.lbm_r	256	354	762	354	763	<b>354</b>	<b>763</b>							
521.wrf_r	256	421	1360	422	1360	<b>422</b>	<b>1360</b>							
526.blender_r	256	168	2330	<b>168</b>	<b>2320</b>	168	2320							
527.cam4_r	256	<b>162</b>	<b>2760</b>	162	2770	162	2760							
538.imagick_r	256	73.5	8670	<b>73.4</b>	<b>8670</b>	73.4	8680							
544.nab_r	256	112	3830	<b>112</b>	<b>3830</b>	112	3830							
549.fotonik3d_r	256	<b>1402</b>	<b>712</b>	1401	712	1402	711							
554.roms_r	256	471	864	471	863	<b>471</b>	<b>863</b>							

**SPECrate®2017\_fp\_base = 2180**

**SPECrate®2017\_fp\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

SPECrate®2017\_fp\_base = 2180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/root/cpu2017F/amd_rate_aocc500_znver5_A_lib/lib:/root/cpu2017F/amd_rate_aocc500_znver5_A_lib/lib32:  
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

### BIOS Configuration

```
ACPI CST C2 Latency set to 18  
NUMA nodes per socket set to NPS4  
Determinism Control is Manual  
Determinism Slider set to Power  
cTDP Control set to Manual  
cTDP set to 500  
PPT Control set to Manual  
PPT set to 500  
SMT Control set to Disable
```

```
Sysinfo program /root/cpu2017F/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Sep 17 05:27:43 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

SPECrate®2017\_fp\_base = 2180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Platform Notes (Continued)

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

---

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09/lp)
x86_64 x86_64 x86_64 GNU/Linux
```

---

```
2. w
05:27:43 up 0 min, 1 user, load average: 0.24, 0.07, 0.02
USER      TTY      FROM          LOGIN@    IDLE     JCPU      PCPU WHAT
root      tty1      -          05:27    46.00s  0.97s  0.10s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

---

```
3. Username
From environment variable $USER: root
```

---

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 6188115
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes       (-u) 6188115
virtual memory            (kbytes, -v) unlimited
file locks                (-x) unlimited
```

---

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
/bin/bash ./test.sh
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
--runmode rate --tune base --size test:train:refrate fprate --nopreenv --note-preenv --logfile
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

**SPECrate®2017\_fp\_base = 2180**

**SPECrate®2017\_fp\_peak = Not Run**

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

```
$SPEC/tmp/CPU2017.001/templogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017F
```

```
-----  
6. /proc/cpuinfo
model name      : AMD EPYC 9755 128-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 26
model          : 2
stepping        : 1
microcode       : 0xb002116
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores       : 128
siblings        : 128
2 physical ids (chips)
256 processors (hardware threads)
physical id 0: core ids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 1: core ids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 0: apicids
0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
240-247
physical id 1: apicids
256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
64-471,480-487,496-503
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.39.3:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 256
On-line CPU(s) list:    0-255
Vendor ID:               AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:              AMD EPYC 9755 128-Core Processor
BIOS Model name:         AMD EPYC 9755 128-Core Processor
BIOS CPU family:         107                                         Unknown CPU @ 2.7GHz
CPU family:              26
Model:                  2
Thread(s) per core:     1
Core(s) per socket:     128
Socket(s):              2
Stepping:                1
Frequency boost:        enabled
CPU(s) scaling MHz:    66%
CPU max MHz:             4121.1909
CPU min MHz:             1500.0000
BogoMIPS:                5391.78
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

**SPECrate®2017\_fp\_base = 2180**

**SPECrate®2017\_fp\_peak = Not Run**

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

**Test Date:** Sep-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Sep-2024

## Platform Notes (Continued)

```
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osw ibs skinfit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2
smep bmil2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local user_shstk avx_vnmi avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmlload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pkum pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnmi avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld sev sev_es debug_swap
```

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

NUMA node2 CPU(s):

NUMA node3 CPU(s):

NUMA node4 CPU(s):

NUMA node5 CPU(s):

NUMA node6 CPU(s):

NUMA node7 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Itlb multihit:

Vulnerability Lltf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

Vulnerability Srbds:

Vulnerability Tsx async abort:

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	12M	12	Data	1	64	1	64
L1i	32K	8M	8	Instruction	1	64	1	64
L2	1M	256M	16	Unified	2	1024	1	64
L3	32M	1G	16	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

SPECrate®2017\_fp\_base = 2180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Platform Notes (Continued)

```
node 0 cpus: 0-31
node 0 size: 192885 MB
node 0 free: 192242 MB
node 1 cpus: 32-63
node 1 size: 193527 MB
node 1 free: 192432 MB
node 2 cpus: 64-95
node 2 size: 193527 MB
node 2 free: 192963 MB
node 3 cpus: 96-127
node 3 size: 193527 MB
node 3 free: 192966 MB
node 4 cpus: 128-159
node 4 size: 193527 MB
node 4 free: 192946 MB
node 5 cpus: 160-191
node 5 size: 193527 MB
node 5 free: 193002 MB
node 6 cpus: 192-223
node 6 size: 193527 MB
node 6 free: 193044 MB
node 7 cpus: 224-255
node 7 size: 193004 MB
node 7 free: 192450 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10
```

---

```
9. /proc/meminfo
MemTotal: 1584184284 kB
```

---

```
10. who -r
run-level 3 Sep 17 05:27
```

---

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target Status
multi-user running
```

---

```
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nsqd
nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd
sshd systemd-pstore tuned wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyaml-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievfd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

SPECrate®2017\_fp\_base = 2180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Platform Notes (Continued)

```
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd udisks2 vncserver@
indirect           systemd-userdbd wicd
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=5a3496a7-de8e-45c0-a91b-a8d427f81cc3  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=371M,high  
crashkernel=72M,low
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 240:  
    current policy: frequency should be within 1.50 GHz and 2.70 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. tuned-adm active  
Current active profile: throughput-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       0  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio     10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 8  
vm.dirty_writeback_centisecs  500  
vm.dirtytime_expire_seconds   43200  
vm.extfrag_threshold          500  
vm.min_unmapped_ratio         1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy     0  
vm.nr_overcommit_hugepages    0  
vm.swappiness                  1  
vm.watermark_boost_factor     15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode          1
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag          [always] defer defer+madvise madvise never  
enabled         [always] madvise never  
hpage_pmd_size 2097152  
shmem_enabled   always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

SPECrate®2017\_fp\_base = 2180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Platform Notes (Continued)

```
alloc_sleep_millisecs    60000
defrag                  1
max_ptes_none           511
max_ptes_shared          256
max_ptes_swap            64
pages_to_scan            4096
scan_sleep_millisecs    10000
```

```
-----  
19. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----  
20. Disk information
SPEC is set to: /root/cpu2017F
Filesystem      Type   Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  btrfs  442G  123G  318G  28% /root
```

```
-----  
21. /sys/devices/virtual/dmi/id
Vendor:        Quanta Cloud Technology Inc.
Product:       QuantaGrid D44N-1U
```

```
-----  
22. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
24x Samsung M321R8GA0PB2-CCPKC 64 GB 2 rank 6400, configured at 6000
```

```
-----  
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     3B02
BIOS Date:        09/09/2024
BIOS Revision:    5.35
Firmware Revision: 5.3
```

## Compiler Version Notes

```
=====
C          | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
```

```
=====
C++         | 508.namd_r(base) 510.parest_r(base)
-----
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

SPECrate®2017\_fp\_base = 2180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++, C | 511.povray\_r(base) 526.blender\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++, C, Fortran | 507.cactusBSSN\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran | 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

SPECrate®2017\_fp\_base = 2180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
526.blender\_r: -funsigned-char -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3  
-march=znver5 -fveclib=AMDLIB -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

SPECrate®2017\_fp\_base = 2180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdaloc  
-lflang -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto  
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdaloc  
-lflang -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdaloc  
-lflang -ldl
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-aggressive-gather=true  
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdaloc -lflang -ldl
```

Benchmarks using both C and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

SPECrate®2017\_fp\_base = 2180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

## Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdaloc -lflang  
-ldl
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner  
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie  
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50  
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions  
-lamdlibm -lamdaloc -lflang -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument
```

Benchmarks using both C and C++:

```
-Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

[http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1\\_AMD\\_Turin.html](http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1_AMD_Turin.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

[http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1\\_AMD\\_Turin.xml](http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v1_AMD_Turin.xml)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D44N-1U  
AMD EPYC 9755

SPECrate®2017\_fp\_base = 2180

SPECrate®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Sep-2024

Hardware Availability: Oct-2024

Software Availability: Sep-2024

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-16 17:27:42-0400.

Report generated on 2024-10-11 12:13:18 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-10.