SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3 (2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base =	1560
SPECrate®2017_int_energy_base =	2430
SPECrate®2017_int_peak =	1600
SPECrate®2017_int_energy_peak =	2470

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

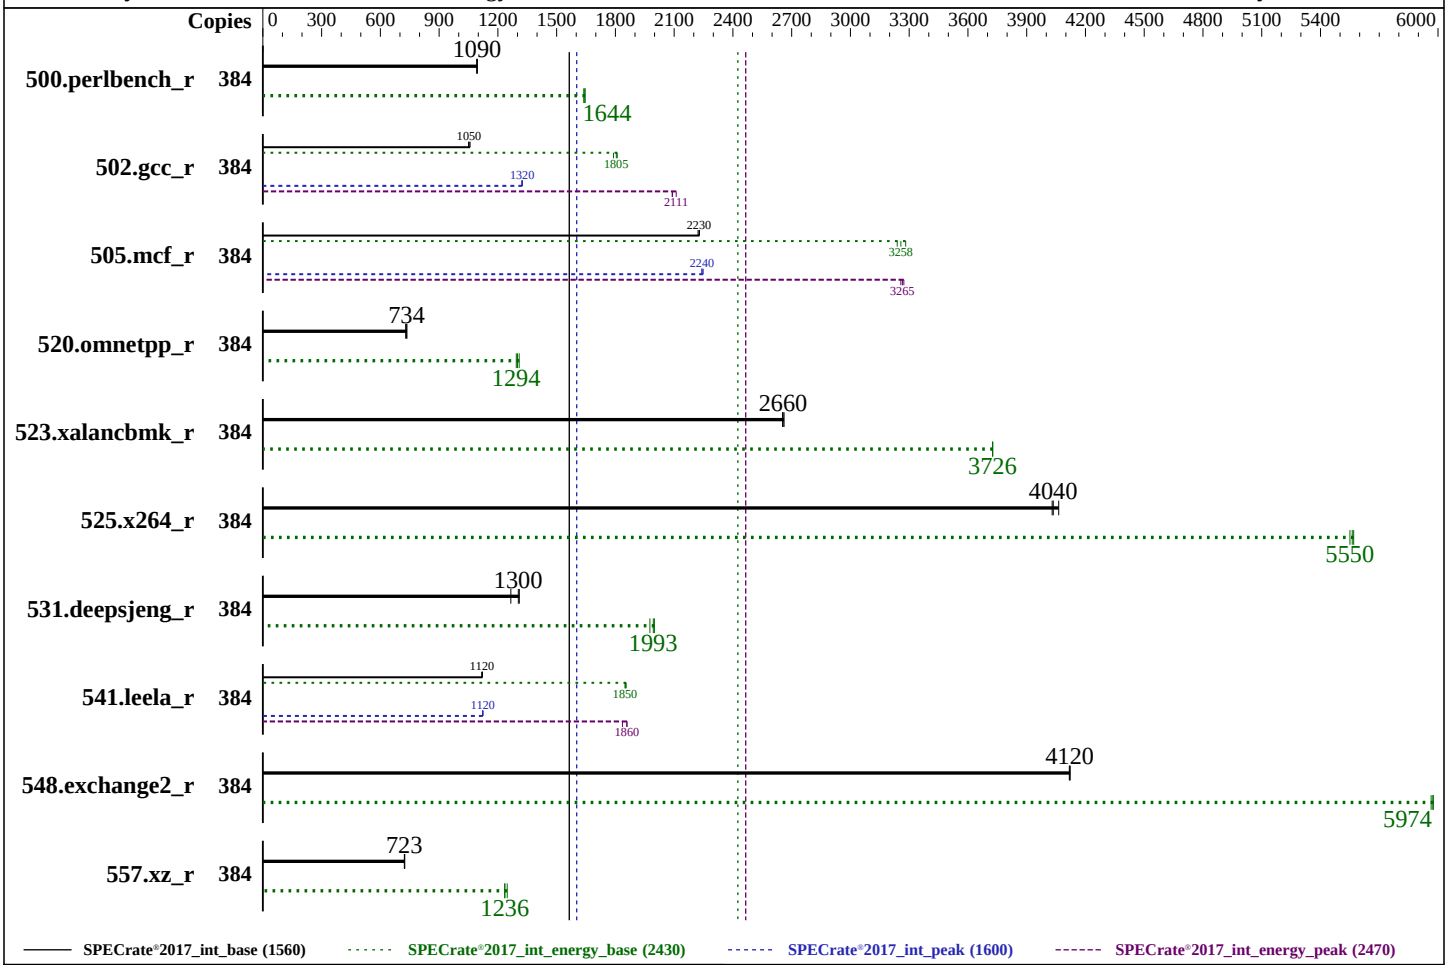

Hardware

CPU Name:	AMD EPYC 9655
Max MHz:	4500
Nominal:	2600
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 4400)
Storage:	1 x 480 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.21-default
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Lenovo BIOS Version KAE125W 5.10 released Aug-2024
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	None
Power Management:	BIOS and OS set to balance power and performance

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3 (2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base =	1560
SPECrate®2017_int_energy_base =	2430
SPECrate®2017_int_peak =	1600
SPECrate®2017_int_energy_peak =	2470

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Power

Max. Power (W): 911.5
Idle Power (W): 160.22
Min. Temperature (C): 24.75
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: Version 53.9 of KAX341H
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 2 x 1100 W (redundant)
Details: ThinkSystem 1100W 230V Titanium Power Supply 4P57A72666
Backplane: 8 x 2.5-inch HDD back plane
Other Storage: None
Storage Model #s: 4XB7A82259
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #s: 6 x Performance fans

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UG05013E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: GRG METROLOGY & TEST (BEIJING) CO., LTD.
Calibration Label: J202308266858A-0004
Calibration Date: 16-Oct-2023
PTDaemon® Version: 1.10.0 (82175bac; 2022-08-17)
Setup Description: Connected to PSU1
Current Ranges Used: 5A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: W63181846
Input Connection: USB
PTDaemon Version: 1.10.0 (82175bac; 2022-08-17)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
500.perlbench_r	384	558	1090	403	1650	722	824	560	1090	405	1640	723	833	**559**	**1090**	**403**	**1640**	**722**	**826**
502.gcc_r	384	518	1050	330	1790	637	766	**516**	**1050**	**327**	**1800**	**634**	**767**	514	1060	326	1810	635	762
505.mcf_r	384	279	2220	210	3240	751	843	**279**	**2230**	**208**	**3260**	**748**	**851**	278	2230	207	3280	743	846
520.omnetpp_r	384	**686**	**734**	**422**	**1290**	**615**	**654**	686	735	417	1310	608	632	691	729	420	1300	607	634
523.xalancbmk_r	384	153	2650	118	3730	771	909	152	2660	118	3730	773	912	**153**	**2660**	**118**	**3730**	**772**	**903**
525.x264_r	384	165	4060	131	5560	792	863	**167**	**4040**	**131**	**5550**	**788**	**863**	167	4030	131	5570	784	860
531.deepsjeng_r	384	**337**	**1300**	**240**	**1990**	**711**	**733**	336	1310	239	2000	712	733	348	1270	242	1980	696	732
541.leela_r	384	**568**	**1120**	**372**	**1850**	**655**	**692**	569	1120	372	1850	654	684	567	1120	371	1850	654	690
548.exchange2_r	384	244	4120	183	5960	749	776	**244**	**4120**	**183**	**5970**	**748**	**775**	244	4120	182	5980	747	774
557.xz_r	384	574	723	365	1230	636	700	572	725	361	1250	631	702	**574**	**723**	**365**	**1240**	**636**	**699**

SPECrate®2017_int_base = 1560

SPECrate®2017_int_energy_base = 2430

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3 (2.60 GHz, AMD EPYC 9655)

SPECrate®2017_int_base = 1560

SPECrate®2017_int_energy_base = 2430

SPECrate®2017_int_peak = 1600

SPECrate®2017_int_energy_peak = 2470

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Sep-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Peak Results Table

Benchmark	Copies	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
500.perlbench_r	384	558	1090	403	1650	722	824	560	1090	405	1640	723	833	**559**	**1090**	**403**	**1640**	**722**	**826**
502.gcc_r	384	**410**	**1320**	**280**	**2110**	**682**	**795**	410	1320	283	2090	688	796	411	1320	282	2090	686	800
505.mcf_r	384	276	2250	208	3260	755	852	**277**	**2240**	**208**	**3270**	**751**	**841**	277	2240	207	3270	749	847
520.omnetpp_r	384	**686**	**734**	**422**	**1290**	**615**	**654**	686	735	417	1310	608	632	691	729	420	1300	607	634
523.xalancbmk_r	384	153	2650	118	3730	771	909	152	2660	118	3730	773	912	**153**	**2660**	**118**	**3730**	**772**	**903**
525.x264_r	384	165	4060	131	5560	792	863	**167**	**4040**	**131**	**5550**	**788**	**863**	167	4030	131	5570	784	860
531.deepsjeng_r	384	**337**	**1300**	**240**	**1990**	**711**	**733**	336	1310	239	2000	712	733	348	1270	242	1980	696	732
541.leela_r	384	567	1120	375	1840	661	696	566	1120	370	1860	654	692	**566**	**1120**	**370**	**1860**	**654**	**688**
548.exchange2_r	384	244	4120	183	5960	749	776	**244**	**4120**	**183**	**5970**	**748**	**775**	244	4120	182	5980	747	774
557.xz_r	384	574	723	365	1230	636	700	572	725	361	1250	631	702	**574**	**723**	**365**	**1240**	**636**	**699**

SPECrate®2017_int_peak = **1600**

SPECrate®2017_int_energy_peak = **2470**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-a
     occ500_znver5_A1/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Custom Mode
Core Performance Boost set to Disabled
Memory Speed set to 4400MHz
NUMA Nodes per Socket set to NPS4
BoostFmax set to Manual
BoostFmax Manual set to 2400

 Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Mon Apr 22 20:02:40 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
```

(Continued on next page)

Platform Notes (Continued)

```
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   20:02:40 up 2 min,  1 user,  load average: 1.12, 1.01, 0.44
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 3093377
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 3093377
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash ./02.remote_local_SPECcpu_1.01.sh
 /bin/bash ./Run025-compliant-amd-rateint.sh
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --power --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
 runcpu --power --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --runmode
   rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.019/templogs/preenv.intrate.019.0.log --lognum 019.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9655 96-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb00210e
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 96
    siblings        : 192
    2 physical ids (chips)
    384 processors (hardware threads)
    physical id 0: core ids 0-95
    physical id 1: core ids 0-95
    physical id 0: apicids 0-191
    physical id 1: apicids 256-447
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               384
  On-line CPU(s) list:                  0-383
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
  Model name:                           AMD EPYC 9655 96-Core Processor
  BIOS Model name:                      AMD EPYC 9655 96-Core Processor                 Unknown CPU @ 2.6GHz
  BIOS CPU family:                      107
  CPU family:                           26
  Model:                                2
  Thread(s) per core:                   2
  Core(s) per socket:                   96
  Socket(s):                            2
  Stepping:                             1
  CPU(s) scaling MHz:                   33%
  CPU max MHz:                          4509.3750
  CPU min MHz:                          1500.0000
  BogoMIPS:                             5192.12
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                        cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                        perfctr_llc mwaitx cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2 ibrs
                                        ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep
                                        bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
```

(Continued on next page)

Platform Notes (Continued)

```
                                  xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                  cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                  xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                  nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                  pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                  avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                  avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                  movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                  flush_l1d debug_swap
  Virtualization:                 AMD-V
  L1d cache:                      9 MiB (192 instances)
  L1i cache:                      6 MiB (192 instances)
  L2 cache:                       192 MiB (192 instances)
  L3 cache:                       768 MiB (24 instances)
  NUMA node(s):                   8
  NUMA node0 CPU(s):              0-23,192-215
  NUMA node1 CPU(s):              24-47,216-239
  NUMA node2 CPU(s):              48-71,240-263
  NUMA node3 CPU(s):              72-95,264-287
  NUMA node4 CPU(s):              96-119,288-311
  NUMA node5 CPU(s):              120-143,312-335
  NUMA node6 CPU(s):              144-167,336-359
  NUMA node7 CPU(s):              168-191,360-383
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                  always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M   16 Unified         2  1024        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-23,192-215
  node 0 size: 96266 MB
  node 0 free: 95561 MB
  node 1 cpus: 24-47,216-239
  node 1 size: 96755 MB
  node 1 free: 96157 MB
  node 2 cpus: 48-71,240-263
```

(Continued on next page)

Platform Notes (Continued)

```
  node 2 size: 96755 MB
  node 2 free: 96197 MB
  node 3 cpus: 72-95,264-287
  node 3 size: 96716 MB
  node 3 free: 96124 MB
  node 4 cpus: 96-119,288-311
  node 4 size: 96755 MB
  node 4 free: 96197 MB
  node 5 cpus: 120-143,312-335
  node 5 size: 96755 MB
  node 5 free: 95971 MB
  node 6 cpus: 144-167,336-359
  node 6 size: 96755 MB
  node 6 free: 96180 MB
  node 7 cpus: 168-191,360-383
  node 7 size: 96609 MB
  node 7 free: 96020 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       791931508 kB

------------------------------------------------------------
10. who -r
  run-level 3 Apr 22 20:00

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                   kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
                   systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                   kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                   serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd
  indirect         systemd-userdbd wickedd
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=c7bcdd76-5da5-4465-a15b-714d6d85ddbc
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 334:
    current policy: frequency should be within 1.50 GHz and 2.60 GHz.
                    The governor "ondemand" may decide which speed to use
                    within this range.
    boost state support:
      Supported: no
      Active: no

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/sda2      btrfs  444G  266G  176G  61% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR665 V3
    Product Family: ThinkSystem
    Serial:         1234567890

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    2x SK Hynix HMCG88AHBRA471N 32 GB 2 rank 6400, configured at 4400
    22x SK Hynix HMCG88AHBRA477N 32 GB 2 rank 6400, configured at 4400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Lenovo
   BIOS Version:      KAE125W-5.10
   BIOS Date:         08/02/2024
   BIOS Revision:     5.10
   Firmware Revision: 53.9
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------

==============================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------

==============================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64

(Continued on next page)

Peak Portability Flags (Continued)

548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl

525.x264_r: basepeak = yes

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3

(Continued on next page)

Peak Optimization Flags (Continued)

541.leela_r (continued):
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):
-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.html
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc500-flags.xml
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.xml

PTDaemon, SPEC CPU, and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-22 08:02:39-0400.
Report generated on 2024-10-10 09:53:13 by CPU2017 PS formatter v6716.
Originally published on 2024-10-10.