



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221


Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Sep-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

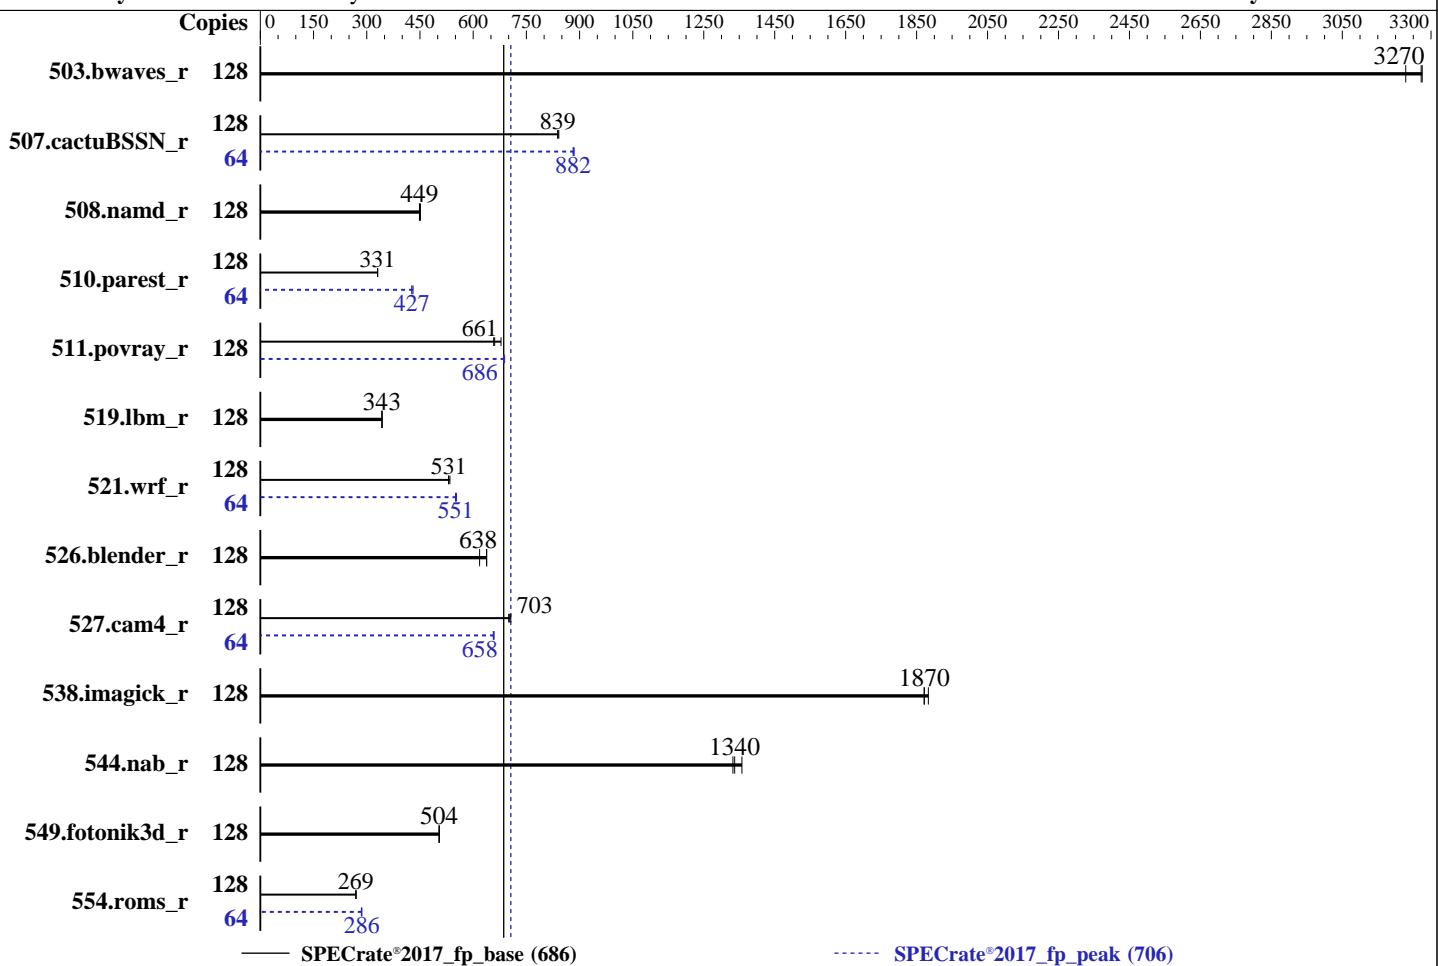

— SPECrate®2017_fp_base (686)

----- SPECrate®2017_fp_peak (706)

Hardware

CPU Name: Intel Xeon Gold 6448H
 Max MHz: 4100
 Nominal: 2400
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: 5 GB I+D off chip per system board
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800BP-R)
 Storage: 960 GB SATA SSD
 Other: CPU Cooling: Air

OS:

Ubuntu 22.04.4 LTS

Compiler:

6.8.0-40-generic

C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;

Parallel:

No

Firmware:

Version EG0.10.01 released Mar-2024

File System:

ext4

System State:

Run level 5 (multi user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Software

Power Management: Defaults



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Date: Sep-2024

Test Sponsor: Meganet

Hardware Availability: Dec-2022

Tested by: Fusionstor system

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	392	3280	398	3230	392	3270	128	392	3280	398	3230	392	3270
507.cactusBSSN_r	128	193	839	193	838	193	841	64	91.6	885	91.8	882	91.9	882
508.namd_r	128	269	451	271	449	271	449	128	269	451	271	449	271	449
510.parest_r	128	1014	330	1013	331	1012	331	64	392	427	389	431	392	427
511.povray_r	128	454	658	452	661	441	678	128	436	686	434	689	436	686
519.llbm_r	128	393	343	393	343	393	343	128	393	343	393	343	393	343
521.wrf_r	128	540	531	540	531	537	534	64	261	550	259	553	260	551
526.blender_r	128	305	638	306	638	315	618	128	305	638	306	638	315	618
527.cam4_r	128	317	706	318	703	320	700	64	170	657	170	658	170	659
538.imagick_r	128	170	1870	170	1870	169	1880	128	170	1870	170	1870	169	1880
544.nab_r	128	162	1330	159	1360	161	1340	128	162	1330	159	1360	161	1340
549.fotonik3d_r	128	990	504	988	505	990	504	128	990	504	988	505	990	504
554.roms_r	128	756	269	755	269	753	270	64	357	285	356	286	356	286

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Sep-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

```
Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on intel Fri Sep 20 17:48:18 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux intel 6.8.0-40-generic #40~22.04.3-Ubuntu SMP PREEMPT_DYNAMIC Tue Jul 30 17:30:19 UTC 2 x86_64 x86_64
x86_64 GNU/Linux

2. w
17:48:18 up 1 day, 1:22, 2 users, load average: 81.28, 116.51, 122.71
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
intel :1 :1 Thu16 ?xdm? 4:09m 0.00s /usr/libexec/gdm-x-session --run-script env
GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
intel pts/1 - 11:40 6:07m 0.94s 0.03s sudo
.reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh

3. Username
From environment variable \$USER: root
From the command 'logname': intel

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Sep-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Platform Notes (Continued)

```
4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)            unlimited
stack(kbytes)           unlimited
coredump(blocks)        0
memory(kbytes)          unlimited
locked memory(kbytes)   132058120
process                4126512
nofiles                1024
vmmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

-----
5. sysinfo process ancestry
/sbin/init splash
/lib/systemd/systemd --user
/usr/libexec/gnome-terminal-server
bash
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sudo ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
sh ./reportable-ic2023.2.3-lin-sapphirerapids-rate-smt-on-20231121.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6448H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode       : 0x2b0005c0
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss bhi
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):         32-bit, 64-bit
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Sep-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Platform Notes (Continued)

Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	128
On-line CPU(s) list:	0-127
Vendor ID:	GenuineIntel
Model name:	Intel(R) Xeon(R) Gold 6448H
CPU family:	6
Model:	143
Thread(s) per core:	2
Core(s) per socket:	32
Socket(s):	2
Stepping:	8
CPU max MHz:	4100.0000
CPU min MHz:	800.0000
BogoMIPS:	4800.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pnpi pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsqsbbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqmi rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsaved xgetbv1 xsaves cqmi_llc cqmi_occup_llc cqmi_mbmi_total cqmi_mbmi_local split_lock_detect user_shstx avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi vnmi avx512vbmi umip pkv ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_llid arch_capabilities
Virtualization:	VT-x
L1d cache:	3 MiB (64 instances)
L1i cache:	2 MiB (64 instances)
L2 cache:	128 MiB (64 instances)
L3 cache:	120 MiB (2 instances)
NUMA node(s):	4
NUMA node0 CPU(s):	0-15,64-79
NUMA node1 CPU(s):	16-31,80-95
NUMA node2 CPU(s):	32-47,96-111
NUMA node3 CPU(s):	48-63,112-127
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Date: Sep-2024

Test Sponsor: Meganet

Hardware Availability: Dec-2022

Tested by: Fusionstor system

Software Availability: Dec-2023

Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0-15,64-79

node 0 size: 257600 MB

node 0 free: 238229 MB

node 1 cpus: 16-31,80-95

node 1 size: 258036 MB

node 1 free: 241802 MB

node 2 cpus: 32-47,96-111

node 2 size: 258036 MB

node 2 free: 241723 MB

node 3 cpus: 48-63,112-127

node 3 size: 258029 MB

node 3 free: 242244 MB

node distances:

node 0 1 2 3

0: 10 12 21 21

1: 12 10 21 21

2: 21 21 10 12

3: 21 21 12 10

9. /proc/meminfo

MemTotal: 1056464972 kB

10. who -r

run-level 5 Sep 19 16:26

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)

Default Target Status

graphical degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

13. Services, from systemctl list-unit-files

STATE	UNIT	FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups cups-browsed dmseg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore systemd-resolved systemd-timesyncd teamviewerd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades wpa_supplicant	
enabled-runtime	netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs	
disabled	acpid brltty console-getty debug-shell nftables openvpn-client@ openvpn-server@ openvpn@	

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Sep-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Platform Notes (Continued)

```
rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures
systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysext
systemd-time-wait-sync tlp upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
wpa_supplicant@
generated apport cpufrequtils loadcpufreq speech-dispatcher
indirect saned@ spice-vdagentd uidd
masked alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
screen-cleanup sudo systemd-rfkill x11-common

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.8.0-40-generic
root=UUID=073562bb-1438-42b9-adfa-6a6f7f3d3559
ro
quiet
splash
vt.handoff=7

-----
15. cpupower frequency-info
analyzing CPU 29:
    current policy: frequency should be within 800 MHz and 4.10 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
boost state support:
    Supported: yes
    Active: yes

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvise [madvise] never
enabled     always [madvise] never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Sep-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Platform Notes (Continued)

```
defrag          1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

```
-----  
19. OS release  
From /etc/*-release /etc/*-version  
os-release Ubuntu 22.04.4 LTS
```

```
-----  
20. Disk information  
SPEC is set to: /home/speccpu/cpu2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda2        ext4  879G  678G  157G  82% /
```

```
-----  
21. /sys/devices/virtual/dmi/id  
Vendor:          Fusionstor  
Product:         Invento_i6000  
Product Family: SG_Intel_EagleStream  
Serial:          HQ3110001BDA03CD0002
```

```
-----  
22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
 16x NO DIMM NO DIMM  
 16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800
```

```
-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:      American Megatrends International, LLC.  
BIOS Version:     EG0.10.01  
BIOS Date:        03/22/2024  
BIOS Revision:    5.32
```

Compiler Version Notes

```
=====| 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
```

```
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

```
=====| 508.namd_r(base, peak) 510.parest_r(base, peak)
```

```
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Sep-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Compiler Version Notes (Continued)

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactusBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Sep-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 686

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Date: Sep-2024

Test Sponsor: Meganet

Hardware Availability: Dec-2022

Tested by: Fusionstor system

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs  
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futo -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast  
-ffast-math -futo -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_base = 686

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Sponsor: Meganet

Tested by: Fusionstor system

Test Date: Sep-2024

Hardware Availability: Dec-2022

Software Availability: Dec-2023

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

SPECrate®2017_fp_base = 686

Invento i6000 (Intel Xeon Gold 6448H)

SPECrate®2017_fp_peak = 706

CPU2017 License: 6221

Test Date: Sep-2024

Test Sponsor: Meganet

Hardware Availability: Dec-2022

Tested by: Fusionstor system

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-09-20 08:18:17-0400.

Report generated on 2024-10-09 14:05:37 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-09.