SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3 (3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base =	19.0
SPECspeed®2017_int_energy_base =	362
SPECspeed®2017_int_peak =	19.8
SPECspeed®2017_int_energy_peak =	380

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

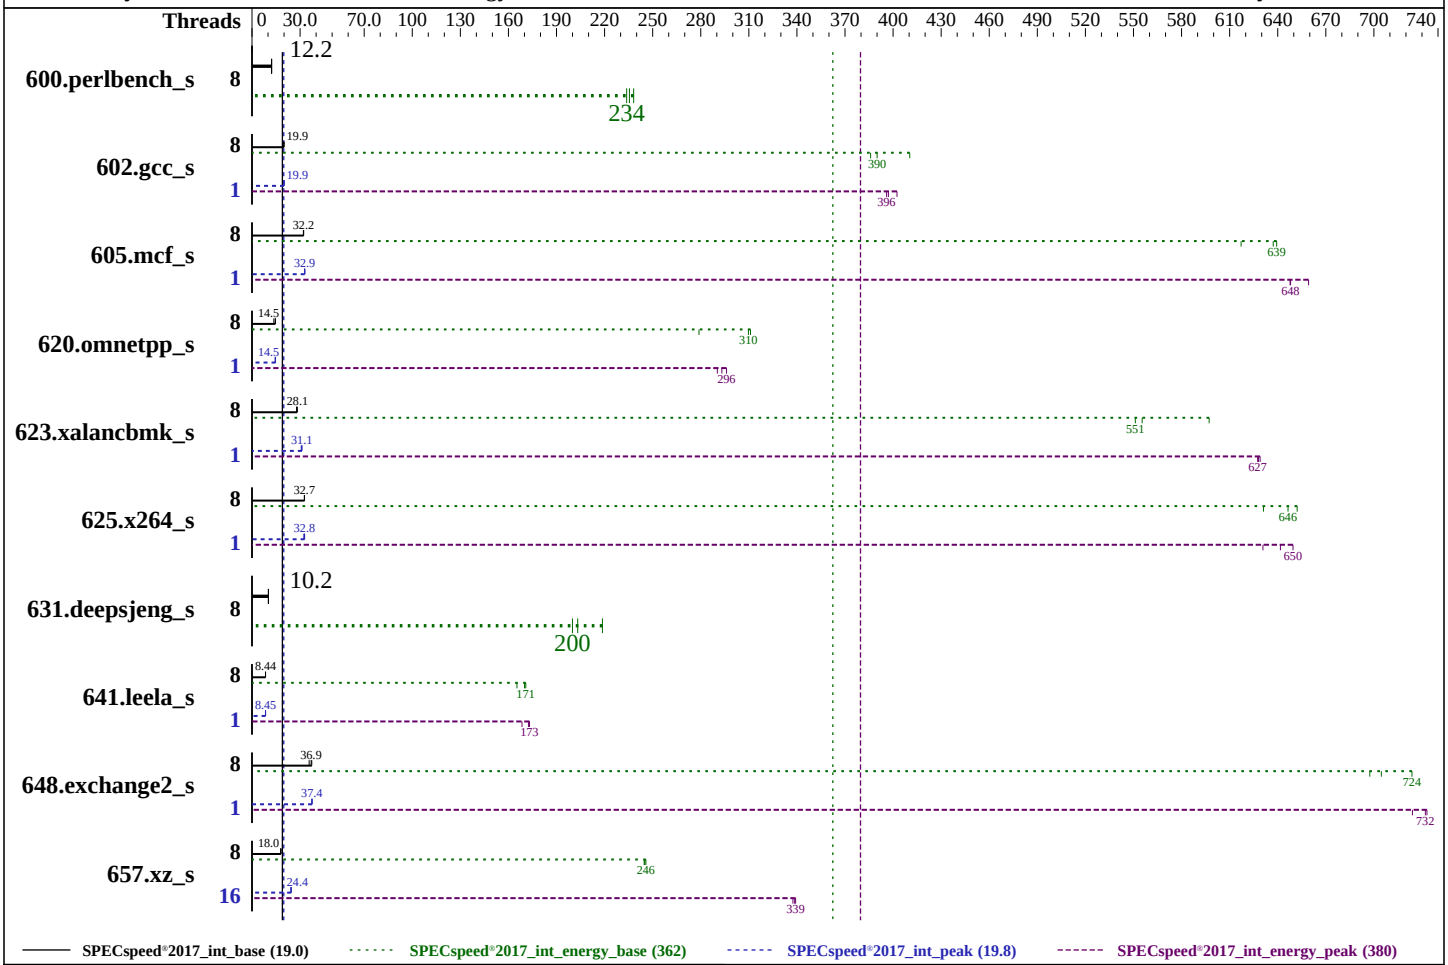

Hardware

CPU Name:	AMD EPYC 4344P
Max MHz:	5300
Nominal:	3800
Enabled:	8 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	32 MB I+D on chip per chip
Other:	None
Memory:	64 GB (2 x 32 GB 2Rx8 PC5-5600B-E, running at 5200)
Storage:	1 x 960GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.21-default
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	Lenovo BIOS Version QIE101S 1.10 released Aug-2024
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	OS set to balance power and performance

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3 (3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base =	19.0
SPECspeed®2017_int_energy_base =	362
SPECspeed®2017_int_peak =	19.8
SPECspeed®2017_int_energy_peak =	380

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Power

Max. Power (W): 93.66
Idle Power (W): 27.35
Min. Temperature (C): 25.00
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 3 wires
Provisioning: Line-powered

Power Settings

Management FW: None
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 300 W (non-redundant)
Details: ATX-300W Power Supply BMFL
Backplane: None
Other Storage: None
Storage Model #s: 4XB7A82275
NICs Installed: 1 x ThinkSystem 2-port embedded @ 1 Gb
NICs Enabled (FW/OS): 2 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #s: Two fixed system fans (front drive bay and rear)

Power Analyzer

Power Analyzer: WIN:9888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3SH31009E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: CEPREI Calibration and Testing Centre
Calibration Label: 1GA24011968-0005
Calibration Date: 27-Sep-2024
PTDaemon® Version: 1.10.0 (82175bac; 2022-08-17)
Setup Description: Connected to PSU1
Current Ranges Used: 1A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:9889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT H
Serial Number: W62330940
Input Connection: USB
PTDaemon Version: 1.10.0 (82175bac; 2022-08-17)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	8	145	12.3	8.09	238	55.9	56.7	**145**	**12.2**	**8.24**	**234**	**56.6**	**57.7**	146	12.2	8.18	235	56.1	57.2
602.gcc_s	8	200	19.9	10.5	410	52.8	56.2	**200**	**19.9**	**11.1**	**390**	**55.4**	**58.1**	201	19.8	11.2	386	55.8	57.8
605.mcf_s	8	**147**	**32.2**	**8.06**	**639**	**54.9**	**57.9**	147	32.1	8.35	617	56.7	58.3	147	32.2	8.08	637	55.2	57.5
620.omnetpp_s	8	120	13.6	6.36	279	53.2	55.2	**112**	**14.5**	**5.73**	**310**	**51.0**	**52.7**	112	14.6	5.71	311	51.1	52.9
623.xalancbmk_s	8	51.0	27.8	2.77	555	54.3	59.4	50.2	28.2	2.58	597	51.3	59.2	**50.4**	**28.1**	**2.79**	**551**	**55.4**	**60.8**
625.x264_s	8	53.8	32.8	2.94	652	54.7	56.2	**53.9**	**32.7**	**2.97**	**646**	**55.1**	**59.1**	54.0	32.7	3.04	631	56.3	57.9
631.deepsjeng_s	8	140	10.3	7.12	219	51.0	52.4	**140**	**10.2**	**7.79**	**200**	**55.7**	**56.7**	140	10.2	7.66	203	54.8	56.0
641.leela_s	8	**202**	**8.44**	**10.8**	**171**	**53.5**	**54.6**	203	8.41	11.2	165	55.1	56.0	202	8.45	10.9	170	53.8	54.8
648.exchange2_s	8	82.5	35.7	4.59	697	55.6	56.3	78.8	37.3	4.54	705	57.6	58.3	**79.7**	**36.9**	**4.42**	**724**	**55.4**	**56.0**
657.xz_s	8	345	17.9	27.5	245	79.7	91.4	342	18.1	27.5	245	80.4	91.5	**344**	**18.0**	**27.4**	**246**	**79.7**	**90.3**

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_energy_base = 362

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem ST45 V3 (3.80 GHz, AMD EPYC 4344P)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_energy_base = 362

SPECspeed®2017_int_peak = 19.8

SPECspeed®2017_int_energy_peak = 380

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Dec-2024
Software Availability: Oct-2024

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	8	145	12.3	8.09	238	55.9	56.7	**145**	**12.2**	**8.24**	**234**	**56.6**	**57.7**	146	12.2	8.18	235	56.1	57.2
602.gcc_s	1	**200**	**19.9**	**10.9**	**396**	**54.8**	**57.5**	200	19.9	10.8	402	53.9	56.7	199	20.0	10.9	397	54.7	57.5
605.mcf_s	1	**144**	**32.9**	**7.95**	**648**	**55.4**	**57.7**	144	32.9	7.81	659	54.4	56.6	144	32.9	7.95	648	55.4	57.6
620.omnetpp_s	1	111	14.7	6.05	293	54.5	56.2	**112**	**14.5**	**5.99**	**296**	**53.4**	**55.3**	113	14.5	6.11	290	54.3	56.1
623.xalancbmk_s	1	**45.6**	**31.1**	**2.45**	**627**	**53.8**	**60.1**	46.1	30.7	2.45	629	53.1	59.0	45.6	31.1	2.45	628	53.8	60.2
625.x264_s	1	54.6	32.3	3.04	631	55.8	57.1	**53.8**	**32.8**	**2.95**	**650**	**54.9**	**56.3**	53.7	32.8	2.99	642	55.7	57.1
631.deepsjeng_s	8	140	10.3	7.12	219	51.0	52.4	**140**	**10.2**	**7.79**	**200**	**55.7**	**56.7**	140	10.2	7.66	203	54.8	56.0
641.leela_s	1	203	8.40	11.0	168	54.0	54.7	**202**	**8.45**	**10.7**	**173**	**52.8**	**53.8**	201	8.48	10.7	172	53.2	54.7
648.exchange2_s	1	78.7	37.3	4.42	724	56.1	57.2	78.5	37.5	4.36	733	55.6	56.4	**78.6**	**37.4**	**4.37**	**732**	**55.6**	**56.4**
657.xz_s	16	253	24.4	19.9	339	78.5	92.3	254	24.4	19.9	338	78.6	93.7	**254**	**24.4**	**19.8**	**339**	**78.3**	**92.4**

SPECspeed®2017_int_peak = **19.8**

SPECspeed®2017_int_energy_peak = **380**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-15"
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-
     aocc500_znver5_A1/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "16"

Environment variables set by runcpu during the 602.gcc_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-15"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Tue Oct 15 03:55:25 2024
```

(Continued on next page)

Platform Notes (Continued)

```
SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   03:55:25 up 13:38,  1 user,  load average: 0.93, 3.69, 3.16
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     pts/0    172.30.81.2      Mon14   10:50m  1.21s  0.05s /bin/bash ./amd_speed_aocc500_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 253429
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
```

(Continued on next page)

Platform Notes (Continued)

```
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 253429
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 /bin/bash ./03.local_run_SPECcpu.sh
 /bin/bash ./Run035-compliant-amd-speedint.sh
 python3 ./run_amd_speed_aocc500_znver5_A1.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --power --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
 runcpu --power --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --runmode
   speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.046/templogs/preenv.intspeed.046.0.log --lognum 046.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 4344P 8-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 97
    stepping        : 2
    microcode       : 0xa601206
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 3584 4K pages
    cpu cores       : 8
    siblings        : 16
    1 physical ids (chips)
    16 processors (hardware threads)
    physical id 0: core ids 0-7
    physical id 0: apicids 0-15
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        48 bits physical, 48 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               16
  On-line CPU(s) list:                  0-15
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
```

(Continued on next page)

Platform Notes (Continued)

```
   Model name:                      AMD EPYC 4344P 8-Core Processor
   BIOS Model name:                 AMD EPYC 4344P 8-Core Processor                None CPU @ 3.8GHz
   BIOS CPU family:                 107
   CPU family:                      25
   Model:                           97
   Thread(s) per core:              2
   Core(s) per socket:              8
   Socket(s):                       1
   Stepping:                        2
   Frequency boost:                 enabled
   CPU(s) scaling MHz:              55%
   CPU max MHz:                     5388.2808
   CPU min MHz:                     3000.0000
   BogoMIPS:                        7585.31
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                    pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                    rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                    extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16
                                    sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                    cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                                    invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                    clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                    user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd cppc
                                    arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
                                    decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif
                                    x2avic v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni
                                    vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq rdpid
                                    overflow_recov succor smca flush_l1d
   Virtualization:                  AMD-V
   L1d cache:                       256 KiB (8 instances)
   L1i cache:                       256 KiB (8 instances)
   L2 cache:                        8 MiB (8 instances)
   L3 cache:                        32 MiB (1 instance)
   NUMA node(s):                    1
   NUMA node0 CPU(s):               0-15
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
   Vulnerability Mmio stale data:        Not affected
   Vulnerability Reg file data sampling: Not affected
   Vulnerability Retbleed:               Not affected
   Vulnerability Spec rstack overflow:   Mitigation; Safe RET
   Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
   Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
   Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                    always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
   Vulnerability Srbds:                  Not affected
   Vulnerability Tsx async abort:        Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
```

(Continued on next page)

Platform Notes (Continued)

```
     L1d       32K     256K    8 Data            1    64        1             64
     L1i       32K     256K    8 Instruction     1    64        1             64
     L2         1M       8M    8 Unified         2  2048        1             64
     L3        32M      32M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 1 nodes (0)
  node 0 cpus: 0-15
  node 0 size: 63407 MB
  node 0 free: 62787 MB
  node distances:
  node   0
    0:  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       64929400 kB

------------------------------------------------------------
10. who -r
  run-level 3 Oct 14 14:18

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                   kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
                   systemd-pstore tuned wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                   kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                   serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd
  generated        ntp_sync
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=89a766c1-c11a-42be-be76-94e9ae8b20b1
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
```

(Continued on next page)

Platform Notes (Continued)

```
  analyzing CPU 6:
    current policy: frequency should be within 3.00 GHz and 3.80 GHz.
                    The governor "conservative" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. tuned-adm active
  Current active profile: desktop

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               0
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 20. Disk information
 SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda3      xfs   893G   94G  800G  11% /

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:         LENOVO
     Product:        ThinkSystem ST45 V3
     Product Family: ThinkSystem
     Serial:         INVALID

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     2x SK Hynix HMCG88AGBEA084N 32 GB 2 rank 5600, configured at 5200


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       LENOVO
    BIOS Version:      QIE101S-1.10
    BIOS Date:         08/28/2024
    BIOS Revision:     1.10
    Firmware Revision: 12.65
ST45 V3 CPU performance result based on 65W maximum consumption limit.
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: Same as 602.gcc_s

(Continued on next page)

Peak Optimization Flags (Continued)

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: basepeak = yes

641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.html`
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-A.xml`
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml`

PTDaemon, SPEC CPU, and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-14 15:55:24-0400.
Report generated on 2024-12-03 10:07:19 by CPU2017 PS formatter v6716.
Originally published on 2024-12-03.