



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

**SPECspeed®2017\_fp\_base = 379**

**SPECspeed®2017\_fp\_peak = Not Run**

CPU2017 License: 19


**Test Date:** Oct-2024

Test Sponsor: Fujitsu

**Hardware Availability:** Dec-2024

Tested by: Fujitsu

**Software Availability:** Sep-2024

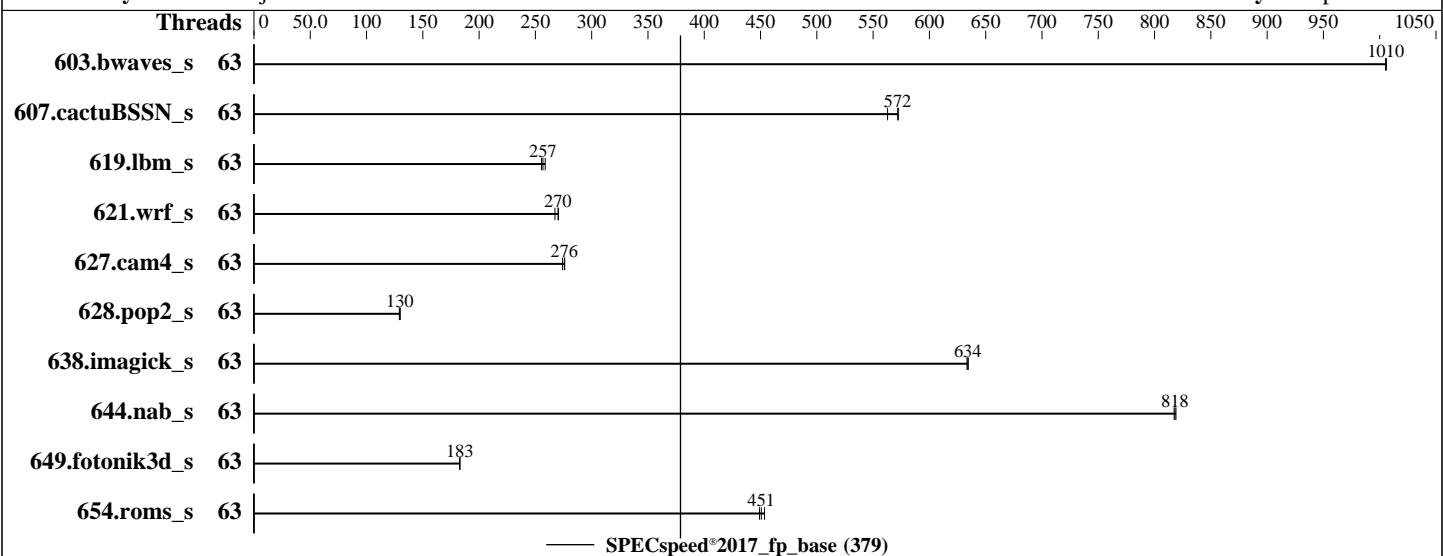

## Hardware

CPU Name: AMD EPYC 9575F  
 Max MHz: 5000  
 Nominal: 3300  
 Enabled: 64 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-5600B-R, running at 4800)  
 Storage: 1 x SATA SSD, 960 GB  
 Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6 kernel version 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Fujitsu BIOS Version V5.0.0.35 R2.2.0 for D4130-A1x. Released Jan-2025 tested as V5.0.0.35 R9.90.0 for D4130-A1x Sep-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Sep-2024

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	63	58.7	1010	58.7	1010	<b>58.7</b>	<b>1010</b>									
607.cactuBSSN_s	63	29.1	572	<b>29.2</b>	<b>572</b>	29.6	563									
619.lbm_s	63	20.5	255	20.2	259	<b>20.4</b>	<b>257</b>									
621.wrf_s	63	49.5	267	48.9	270	<b>49.0</b>	<b>270</b>									
627.cam4_s	63	<b>32.1</b>	<b>276</b>	32.3	274	32.1	276									
628.pop2_s	63	91.9	129	91.5	130	<b>91.5</b>	<b>130</b>									
638.imagick_s	63	22.7	634	22.8	633	<b>22.7</b>	<b>634</b>									
644.nab_s	63	21.3	819	<b>21.4</b>	<b>818</b>	21.4	817									
649.fotonik3d_s	63	49.9	183	<b>49.9</b>	<b>183</b>	49.8	183									
654.roms_s	63	34.7	453	<b>34.9</b>	<b>451</b>	35.1	449									

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Oct-2024

Test Sponsor: Fujitsu

Hardware Availability: Dec-2024

Tested by: Fujitsu

Software Availability: Sep-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-62"
LD_LIBRARY_PATH =
    "/home/Benchmark/speccpu2017s-Turin/amd_speed_aocc500_znver5_A_lib/lib:/home/Benchmark/speccpu2017s-Tu
    rin/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "63"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
SMT control = Disabled  
L1 Stride Prefetcher = Disabled  
Determinism Slider = Power  
TDP Control = Manual  
TDP Limit = 400  
Package Power Limit Control = Manual  
Package Power Limit = 400  
Power Profile Selection = High Performance  
FAN Control = Full

```
Sysinfo program /home/Benchmark/speccpu2017s-Turin/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Oct 23 00:18:26 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Sep-2024

## Platform Notes (Continued)

```
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
-----
-----
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
-----
2. w
00:18:26 up 47 min, 2 users, load average: 46.80, 56.40, 54.40
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 23:32 44:58 0.66s 0.03s /bin/bash ./amd_speed_aocc500_znver5_A1.sh
root tty2 - 00:14 3:21 0.04s 0.01s less
CPU2017-systemName-CPU-nPnCnT-n.nGHz-BIOSxxxx-nItr-nnnGiB_nnnnMHz-osVersion-amd_speed_aocc500_znver5_A1-202
41022_2333/CPU2017.001.fpspeed.txt
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 1542147
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 1542147
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_fpspeed_aocc500_znver5_A1_31.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune base --reportable --iterations 3 --nopower
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Oct-2024

Test Sponsor: Fujitsu

Hardware Availability: Dec-2024

Tested by: Fujitsu

Software Availability: Sep-2024

## Platform Notes (Continued)

```
--runmode speed --tune base --size test:train:refspeed fpsspeed --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.001/templogs/preenv.fpsspeed.001.0.log --lognum 001.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/Benchmark/speccpu2017s-Turin
```

```
-----  
6. /proc/cpuinfo  
model name      : AMD EPYC 9575F 64-Core Processor  
vendor_id       : AuthenticAMD  
cpu family     : 26  
model          : 2  
stepping        : 1  
microcode       : 0xb002116  
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass  
TLB size        : 192 4K pages  
cpu cores       : 64  
siblings        : 64  
1 physical ids (chips)  
64 processors (hardware threads)  
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119  
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	64
On-line CPU(s) list:	0-63
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9575F 64-Core Processor
BIOS Model name:	AMD EPYC 9575F 64-Core Processor
BIOS CPU family:	Unknown CPU @ 3.3GHz
CPU family:	107
Model:	26
Thread(s) per core:	2
Core(s) per socket:	1
Socket(s):	64
Stepping:	1
Frequency boost:	enabled
CPU(s) scaling MHz:	68%
CPU max MHz:	5008.0068
CPU min MHz:	1500.0000
BogoMIPS:	6589.80
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Oct-2024

Test Sponsor: Fujitsu

Hardware Availability: Dec-2024

Tested by: Fujitsu

Software Availability: Sep-2024

## Platform Notes (Continued)

```
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total
cqmq_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaverptr rdpru wbnoinvd amd_ppin cppo arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmlload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_l1d debug_swap
```

Virtualization:

AMD-V

L1d cache:

3 MiB (64 instances)

L1i cache:

2 MiB (64 instances)

L2 cache:

64 MiB (64 instances)

L3 cache:

256 MiB (8 instances)

NUMA node(s):

1

NUMA node0 CPU(s):

0-63

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability Llft:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation: Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation: Enhanced / Automatic IBRS; IBPB conditional; STIBP

disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	16	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)

node 0 cpus: 0-63

node 0 size: 385562 MB

node 0 free: 384003 MB

node distances:

node 0

0: 10

-----  
9. /proc/meminfo

MemTotal: 394816464 kB

-----  
10. who -r

run-level 3 Oct 22 23:31

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Sep-2024

## Platform Notes (Continued)

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files  
-----  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance  
iscsi issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor nsqd  
postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore virtqemud wicked  
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info  
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd iscsi-init iscsid  
issue-add-ssh-keys kexec-load ksm kvm kvm\_stat libvirt-guests lunmask man-db-create multipathd  
nfs nfs-blkmap nfs-server nfsserver rpcbind rpmconfigcheck rsyncd serial-getty@  
smartd\_generate\_opts snmpd snmptrapd strongswan strongswan-starter svnservice  
systemd-boot-check-no-failures systemd-confcontext systemd-network-generator systemd-nspawn@  
systemd-sysext systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced  
virtlockd virtlogd virtnetworkd virtnodeudev virtnwfilterd virtsecretd virtstoraged  
vncserver@  
indirect pcsd systemd-userdbd tftp wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=803d1916-887f-4ele-bc36-a1ab2542d352  
splash=silent  
resume=/dev/disk/by-uuid/ff08e126-00b4-4583-943a-09584dbe7c67  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=369M,high  
crashkernel=72M,low

14. cpupower frequency-info  
analyzing CPU 30:  
current policy: frequency should be within 1.50 GHz and 3.30 GHz.  
The governor "performance" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes

15. sysctl  
kernel.numa\_balancing 0  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Oct-2024

Test Sponsor: Fujitsu

Hardware Availability: Dec-2024

Tested by: Fujitsu

Software Availability: Sep-2024

## Platform Notes (Continued)

```
vm.nr_hugepages          0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness             1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode      1

-----
16. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan           4096
    scan_sleep_millisecs   10000

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP6

-----
19. Disk information
SPEC is set to: /home/Benchmark/speccpu2017s-Turin
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   476G  31G  446G  7% /home

-----
20. /sys/devices/virtual/dmi/id
Vendor: FUJITSU
Product: PRIMERGY RX1440 M2
Product Family: SERVER
Serial: xxxxxxxxxxxx

-----
21. dmidecode
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
 12x Samsung M321R4GA3PB0-CWMKH 32 GB 2 rank 5600, configured at 4800

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: FUJITSU // American Megatrends Inc.
BIOS Version: V5.0.0.35 R9.90.0 for D4130-A1x
BIOS Date: 09/13/2024
BIOS Revision: 9.90
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Oct-2024

Test Sponsor: Fujitsu

Hardware Availability: Dec-2024

Tested by: Fujitsu

Software Availability: Sep-2024

## Platform Notes (Continued)

Firmware Revision: 2.45

### Compiler Version Notes

=====

C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

C++, C, Fortran | 607.cactuBSSN\_s(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin  
AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====

## Base Compiler Invocation

C benchmarks:

clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Sep-2024

## Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC\_OPENMP -flto  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops  
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3  
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Oct-2024

Hardware Availability: Dec-2024

Software Availability: Sep-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5  
-fveclib=AMDLIB -ffast-math -fopenmp -DSPEC_OPENMP -flio  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -funroll-loops  
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp  
-lomp -lamdlibm -lamdaloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5  
-fveclib=AMDLIB -ffast-math -fopenmp -DSPEC_OPENMP -flio  
-fremap-arrays -fstrip-mining -fstruct-layout=7  
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt  
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100  
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none  
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Turin-RevA.html>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1440 M2,  
AMD EPYC 9575F, 3.30 GHz

SPECspeed®2017\_fp\_base = 379

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 19

Test Date: Oct-2024

Test Sponsor: Fujitsu

Hardware Availability: Dec-2024

Tested by: Fujitsu

Software Availability: Sep-2024

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-Turin-RevA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-22 11:18:26-0400.

Report generated on 2024-11-06 12:22:51 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-05.