SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6725 (AMD EPYC 9655 96-Core Processor)

SPECrate®2017_int_base = 2090

SPECrate®2017_int_peak = 2140

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

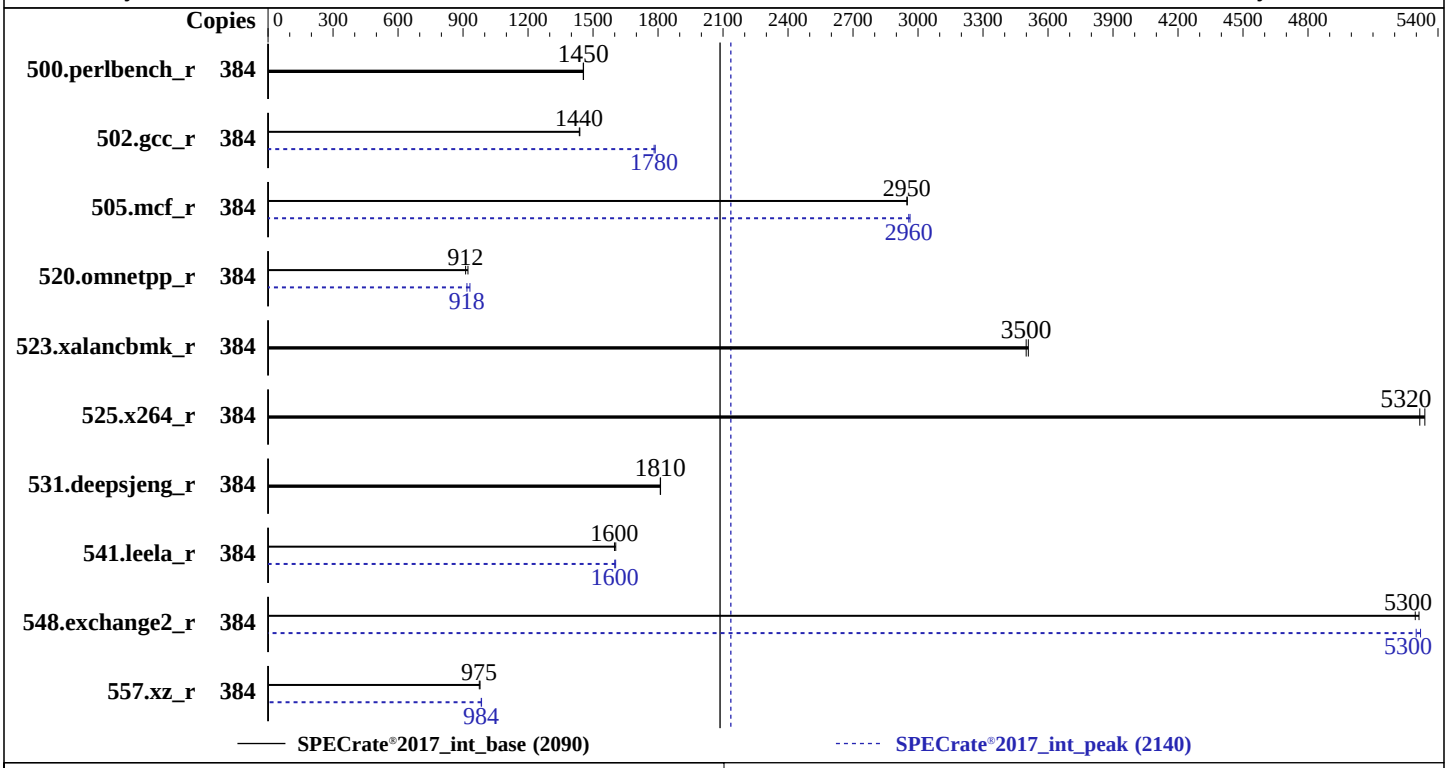

Hardware

CPU Name:	AMD EPYC 9655
Max MHz:	4500
Nominal:	2600
Enabled:	192 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R, running at 6000)
Storage:	180 GB on tmpfs
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04 LTS 6.8.0-41-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Version 0.3.3 [X-REV] released Oct-2024
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6725 (AMD EPYC 9655 96-Core Processor)

SPECrate®2017_int_base = 2090

SPECrate®2017_int_peak = 2140

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	**420**	**1450**	420	1460			384	**420**	**1450**	420	1460		
502.gcc_r	384	378	1440	**378**	**1440**			384	304	1790	**305**	**1780**		
505.mcf_r	384	210	2950	**210**	**2950**			384	209	2960	**210**	**2960**		
520.omnetpp_r	384	**553**	**912**	546	923			384	541	932	**549**	**918**		
523.xalancbmk_r	384	**116**	**3500**	116	3510			384	**116**	**3500**	116	3510		
525.x264_r	384	**126**	**5320**	126	5340			384	**126**	**5320**	126	5340		
531.deepsjeng_r	384	**243**	**1810**	243	1810			384	**243**	**1810**	243	1810		
541.leela_r	384	**398**	**1600**	396	1600			384	396	1600	**397**	**1600**		
548.exchange2_r	384	**190**	**5300**	189	5310			384	189	5320	**190**	**5300**		
557.xz_r	384	**425**	**975**	424	979			384	421	985	**421**	**984**		

SPECrate®2017_int_base = 2090

SPECrate®2017_int_peak = 2140

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1/amd_rate_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu2017-1
     .1.9-aocc500-znerv5_A1/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.


 Benchmark run from a 180 GB ramdisk created with the cmd: "mount -t tmpfs -o size=180G tmpfs /mnt/ramdisk"
```

Platform Notes

```
 BIOS settings:
             DRAM Refresh Delay : Performance
  DIMM Self Healing on -
     Uncorrectable Memory Error : Disabled

      Virtualization Technology : Disabled
          NUMA Nodes per Socket : 4

                  System Profile : Custom
                       C-States : Disabled
            Memory Patrol Scrub : Disabled
     PCI ASPM L1 Link -
               Power Management : Disabled
            Determinism Control : Manual
             Determinism Slider : Power Determinism
                 Optimizer Mode : Enabled

 Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on SLR6728-R6725 Thu Oct 24 19:20:12 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
```

(Continued on next page)

Platform Notes (Continued)

```
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux SLR6728-R6725 6.8.0-41-generic #41-Ubuntu SMP PREEMPT_DYNAMIC Fri Aug  2 20:41:06 UTC 2024 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   19:20:12 up 6 min,  1 user,  load average: 0.14, 0.03, 0.01
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                19:18   27.00s  1.28s  0.42s /bin/bash ./amd_rate_aocc500_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              6188767
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 /bin/bash /home/DellFiles/bin/DELL_rate.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_EPYC-5.inc --define
   DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.7 --output_format html,pdf,txt
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define DL-BIOS-NPS=4
```

(Continued on next page)

Platform Notes (Continued)

```
    --define DL-BIOSinc=Dell-BIOS_EPYC-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define
    DL-VERS=5.3.7 --output_format html,pdf,txt intrate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
    DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-5.inc --define DL-BIOS-LogProc=1 --define
    DL-BIOS-adddcD=1 --define DL-VERS=5.3.7 --output_format html,pdf,txt --nopower --runmode rate --tune
    base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
    $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1

------------------------------------------------------------
6. /proc/cpuinfo
     model name      : AMD EPYC 9655 96-Core Processor
     vendor_id       : AuthenticAMD
     cpu family      : 26
     model           : 2
     stepping        : 1
     microcode       : 0xb002116
     bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
     TLB size        : 192 4K pages
     cpu cores       : 96
     siblings        : 192
     2 physical ids (chips)
     384 processors (hardware threads)
     physical id 0: core ids 0-95
     physical id 1: core ids 0-95
     physical id 0: apicids 0-191
     physical id 1: apicids 256-447
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               384
   On-line CPU(s) list:                  0-383
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       AMD
   Model name:                           AMD EPYC 9655 96-Core Processor
   BIOS Model name:                      AMD EPYC 9655 96-Core Processor                 CPU @ 2.6GHz
   BIOS CPU family:                      107
   CPU family:                           26
   Model:                                2
   Thread(s) per core:                   2
   Core(s) per socket:                   96
   Socket(s):                            2
   Stepping:                             1
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   58%
   CPU max MHz:                          4509.3750
   CPU min MHz:                          1500.0000
   BogoMIPS:                             5193.05
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                         pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
```

(Continued on next page)

Platform Notes (Continued)

```
                                 extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                 cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                 osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                 perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                 avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                 xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                 cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                 xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                 nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                 pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                 avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                 avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                 movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                 flush_l1d debug_swap
  L1d cache:                     9 MiB (192 instances)
  L1i cache:                     6 MiB (192 instances)
  L2 cache:                      192 MiB (192 instances)
  L3 cache:                      768 MiB (24 instances)
  NUMA node(s):                  8
  NUMA node0 CPU(s):             0-23,192-215
  NUMA node1 CPU(s):             24-47,216-239
  NUMA node2 CPU(s):             48-71,240-263
  NUMA node3 CPU(s):             72-95,264-287
  NUMA node4 CPU(s):             96-119,288-311
  NUMA node5 CPU(s):             120-143,312-335
  NUMA node6 CPU(s):             144-167,336-359
  NUMA node7 CPU(s):             168-191,360-383
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                 always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1    64        1             64
     L1i       32K       6M    8 Instruction     1    64        1             64
     L2         1M     192M   16 Unified         2  1024        1             64
     L3        32M     768M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-23,192-215
  node 0 size: 192747 MB
  node 0 free: 191514 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 1 cpus: 24-47,216-239
   node 1 size: 193516 MB
   node 1 free: 193027 MB
   node 2 cpus: 48-71,240-263
   node 2 size: 193516 MB
   node 2 free: 193051 MB
   node 3 cpus: 72-95,264-287
   node 3 size: 193500 MB
   node 3 free: 193075 MB
   node 4 cpus: 96-119,288-311
   node 4 size: 193516 MB
   node 4 free: 193038 MB
   node 5 cpus: 120-143,312-335
   node 5 size: 193516 MB
   node 5 free: 193061 MB
   node 6 cpus: 144-167,336-359
   node 6 size: 193516 MB
   node 6 free: 188645 MB
   node 7 cpus: 168-191,360-383
   node 7 size: 193431 MB
   node 7 free: 192941 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  32  32  32  32
     1:  12  10  12  12  32  32  32  32
     2:  12  12  10  12  32  32  32  32
     3:  12  12  12  10  32  32  32  32
     4:  32  32  32  32  10  12  12  12
     5:  32  32  32  32  12  10  12  12
     6:  32  32  32  32  12  12  10  12
     7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
    MemTotal:       1584397068 kB

------------------------------------------------------------
10. who -r
   run-level 5 Oct 24 19:08

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
   Default Target  Status
   graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
   STATE            UNIT FILES
   enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                    cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                    grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd
                    networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                    sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
                    systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
   enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
   disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                    systemd-boot-check-no-failures systemd-confext systemd-network-generator
                    systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                    systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                    systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
```

(Continued on next page)

Platform Notes (Continued)

```
                  systemd-time-wait-sync upower
  indirect        systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked          cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-41-generic
  root=UUID=646610b2-1524-4713-b470-eb06f7216655
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 201:
    current policy: frequency should be within 1.50 GHz and 2.60 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  800MHz

------------------------------------------------------------
15. tuned-adm active
  Current active profile: latency-performance

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio           3
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
```

(Continued on next page)

Platform Notes (Continued)

```
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000

 ------------------------------------------------------------
 19. OS release
   From /etc/*-release /etc/*-version
   os-release Ubuntu 24.04 LTS

 ------------------------------------------------------------
 20. Disk information
 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs  180G  3.3G  177G   2% /mnt/ramdisk

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:          Dell Inc.
     Product:         PowerEdge R6725
     Product Family: PowerEdge
     Serial:          SLR6728

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     24x 80CE000080CE M321R8GA0PB2-CCPPC 64 GB 2 rank 6400, configured at 6000


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      0.3.3 [X-REV]
    BIOS Date:         10/14/2024
    BIOS Revision:     0.3
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
C       | 502.gcc_r(peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl

Base Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Peak Portability Flags

500.perlbench_r: `-DSPEC_LINUX_X64 -DSPEC_LP64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`
523.xalancbmk_r: `-DSPEC_LINUX -DSPEC_LP64`
525.x264_r: `-DSPEC_LP64`
531.deepsjeng_r: `-DSPEC_LP64`
541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Peak Optimization Flags

C benchmarks:

500.perlbench_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

502.gcc_r: `-m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner -z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -fgnu89-inline -lamdalloc`

505.mcf_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang -lamdalloc-ext -ldl`

525.x264_r: `basepeak = yes`

557.xz_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang -lamdalloc-ext -ldl`

C++ benchmarks:

520.omnetpp_r: `-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie -fvirtual-function-elimination -fvisibility=hidden -mllvm -do-block-reorder=advanced -lamdlibm -lamdalloc-ext -ldl`

523.xalancbmk_r: `basepeak = yes`

(Continued on next page)

Peak Optimization Flags (Continued)

531.deepsjeng_r: `basepeak = yes`

541.leela_r: `-m64 -std=c++14`
`-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast`
`-march=znver5 -fveclib=AMDLIBM -ffast-math -flto`
`-mllvm -unroll-threshold=100`
`-mllvm -reduce-array-computations=3 -zopt -fno-PIE`
`-no-pie -fvirtual-function-elimination -fvisibility=hidden`
`-mllvm -do-block-reorder=advanced -lamdlibm -lflang`
`-lamdalloc-ext -ldl`

Fortran benchmarks:
`-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6`
`-Wl,-mllvm -Wl,-reduce-array-computations=3`
`-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop`
`-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM`
`-ffast-math -flto -fepilog-vectorization-of-inductions`
`-mllvm -optimize-strided-mem-cost -floop-transform`
`-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm`
`-lflang -lamdalloc -ldl`

Peak Other Flags

C benchmarks (except as noted below):
`-Wno-unused-command-line-argument`

502.gcc_r: `-L/usr/lib32 -Wno-unused-command-line-argument`
`-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc500-flags.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.4.html`

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/aocc500-flags.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.4.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-24 15:20:11-0400.
Report generated on 2024-11-20 11:04:29 by CPU2017 PS formatter v6716.
Originally published on 2024-11-19.