



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2024

Hardware Availability: Nov-2024

Software Availability: Apr-2024

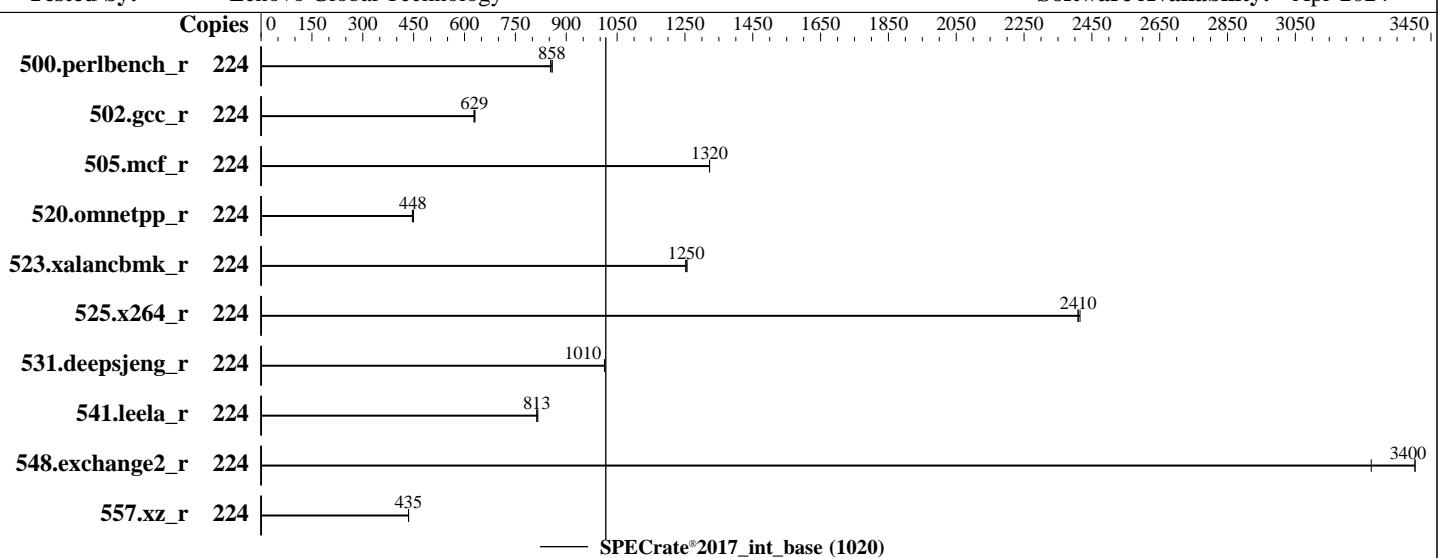

### Hardware

CPU Name: Intel Xeon 6746E  
Max MHz: 2700  
Nominal: 2000  
Enabled: 224 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 64 KB I + 32 KB D on chip per core  
L2: 4 MB I+D on chip per core  
L3: 96 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R, running at 5600)  
Storage: 1 x 3.84 TB NVME SSD  
Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
Compiler: Kernel 5.14.0-427.13.1.el9\_4.x86\_64  
C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: Lenovo BIOS Version IHE107B 1.10 released Sep-2024  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	<b>416</b>	<b>858</b>	415	858	418	853							
502.gcc_r	224	<b>504</b>	<b>629</b>	503	631	505	628							
505.mcf_r	224	274	1320	274	1320	<b>274</b>	<b>1320</b>							
520.omnetpp_r	224	659	446	<b>656</b>	<b>448</b>	654	450							
523.xalancbmk_r	224	188	1260	<b>189</b>	<b>1250</b>	189	1250							
525.x264_r	224	<b>163</b>	<b>2410</b>	163	2410	162	2420							
531.deepsjeng_r	224	253	1010	<b>253</b>	<b>1010</b>	253	1010							
541.leela_r	224	454	816	456	813	<b>456</b>	<b>813</b>							
548.exchange2_r	224	<b>172</b>	<b>3400</b>	179	3270	172	3400							
557.xz_r	224	556	435	<b>556</b>	<b>435</b>	556	435							

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/lib/ia32:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Workload Profile set to High Performance Computing

UPI Link Disable set to Minimum Number of Links Enabled

```
Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Oct 30 21:21:54 2024
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9\_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----

1. uname -a  
Linux localhost.localdomain 5.14.0-427.13.1.el9\_4.x86\_64 #1 SMP PREEMPT\_DYNAMIC Wed Apr 10 10:29:16 EDT  
2024 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
21:21:54 up 3 min, 0 users, load average: 0.20, 0.30, 0.14  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT

3. Username  
From environment variable \$USER: root

4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

### Platform Notes (Continued)

```

core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals          (-i) 4127104
max locked memory       (kbytes, -l) unlimited
max memory size         (kbytes, -m) unlimited
open files              (-n) 102400
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes       (-u) 4127104
virtual memory           (kbytes, -v) unlimited
file locks              (-x) unlimited

```

---

#### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
sh Run702-compliant-ic2024.1-lin-sierraforest-rateint-base-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=224 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --reportable --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
  ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=224 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --reportable --tune base --output_format all
  --nopower --runmode rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.596/templogs/preenv.intrate.596.0.log --lognum 596.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

```

---

#### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6746E
vendor_id       : GenuineIntel
cpu family     : 6
model          : 175
stepping        : 3
microcode       : 0x30000270
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 112
siblings        : 112
2 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids 0-111
physical id 1: core ids 0-111
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222
physical id 1: apicids
512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Platform Notes (Continued)

,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,  
722,724,726,728,730,732,734

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 48 bits virtual
Byte Order:	Little Endian
CPU(s):	224
On-line CPU(s) list:	0-223
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) 6746E
BIOS Model name:	Intel(R) Xeon(R) 6746E
CPU family:	6
Model:	175
Thread(s) per core:	1
Core(s) per socket:	112
Socket(s):	2
Stepping:	3
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cat_11 cdp_13 cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occu_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni lam wbnoinvd dtherm ida arat pln pts vnmi umip pkru ospke waitpkg gfni vaes vpclmulqdq tme rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize pconfig arch_lbr ibt flush_lld arch_capabilities
Virtualization:	VT-x
L1d cache:	7 MiB (224 instances)
L1i cache:	14 MiB (224 instances)
L2 cache:	224 MiB (56 instances)
L3 cache:	192 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-111
NUMA node1 CPU(s):	112-223
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Not affected
Vulnerability Spec store bypass:	Mitigation: Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation: Enhanced / Automatic IBRS, IBPB conditional, RSB filling,

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Platform Notes (Continued)

PBRSB-eIBRS Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	7M	8	Data	1	64	1	64
L1i	64K	14M	8	Instruction	1	128	1	64
L2	4M	224M	16	Unified	2	4096	1	64
L3	96M	192M	12	Unified	3	131072	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0-111  
node 0 size: 515805 MB  
node 0 free: 514527 MB  
node 1 cpus: 112-223  
node 1 size: 516009 MB  
node 1 free: 514577 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

-----  
9. /proc/meminfo

MemTotal: 1056578992 kB

-----  
10. who -r  
run-level 3 Oct 30 21:18

-----  
11. Systemd service manager version: systemd 252 (252-32.el9\_4)

Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor mdmonitor microcode nis-domainname nvmefc-boot-connections rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2 upower
enabled-runtime	systemd-remount-fs
disabled	canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade kvm_stat man-db-restart-cache-update nftables nvme-fc-autoconnect pesign rdisc rhcd rhsm rhsm-facts rpmbdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
generated	jexec
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=(hd0,gpt2)/boot/vmlinuz-5.14.0-427.13.1.el9\_4.x86\_64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Platform Notes (Continued)

```
root=UUID=218263b5-b938-4bb9-acd2-fdd6e13af967
ro
resume=UUID=28b98cc0-6b11-4f02-b151-4d764447b0f5
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 143:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
defrag           always defer defer+madvise [madvise] never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs  60000  
defrag               1  
max_ptes_none        511  
max_ptes_shared       256  
max_ptes_swap         64  
pages_to_scan         4096  
scan_sleep_millisecs 10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release      Red Hat Enterprise Linux 9.4 (Plow)  
redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)  
system-release  Red Hat Enterprise Linux release 9.4 (Plow)
```

```
-----  
19. Disk information
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Platform Notes (Continued)

SPEC is set to: /home/cpu2017-1.1.9-ic2024.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p4	xfs	3.5T	42G	3.4T	2%	/home

-----  
20. /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SR630 V4
Product Family:	ThinkSystem
Serial:	0987654321

-----  
21. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x SK Hynix HMCG94AHBRA275N 64 GB 2 rank 6400, configured at 5600
4x SK Hynix HMCG94AHBRA281N 64 GB 2 rank 6400, configured at 5600

-----  
22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor:	
IHE107B-1.10	
BIOS Date:	09/11/2024
BIOS Revision:	1.10
Firmware Revision:	1.0

## Compiler Version Notes

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2\_r(base)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR630 V4  
(2.00 GHz, Intel Xeon 6746E)

SPECrate®2017\_int\_base = 1020

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2024

Tested by: Lenovo Global Technology

Software Availability: Apr-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-B.html>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-B.xml>  
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-30 09:21:54-0400.

Report generated on 2024-11-20 11:14:59 by CPU2017 PDF formatter v6716.

Originally published on 2024-11-19.