SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_base = 1020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Apr-2024

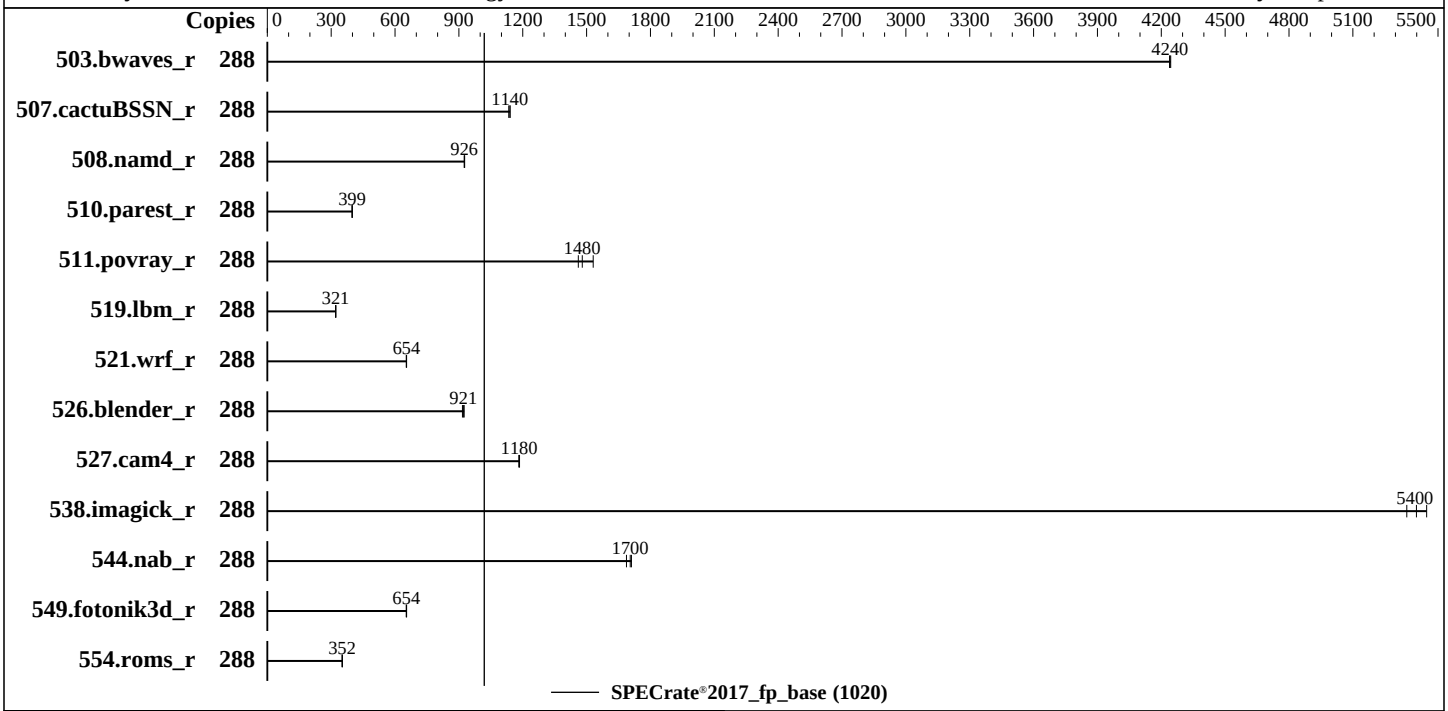

Hardware

CPU Name:	Intel Xeon 6766E
Max MHz:	2700
Nominal:	1900
Enabled:	288 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	64 KB I + 32 KB D on chip per core
L2:	4 MB I+D on chip per core
L3:	108 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 3.84 TB NVME SSD
Other:	CPU Cooling: Air

Software

OS:	Red Hat Enterprise Linux 9.4 (Plow) Kernel 5.14.0-427.13.1.el9_4.x86_64
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Lenovo BIOS Version IHE107B 1.10 released Sep-2024
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V4
(1.90 GHz, Intel Xeon 6766E)

SPECrate®2017_fp_base = 1020

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2024
Hardware Availability: Nov-2024
Software Availability: Apr-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	288	681	4240	680	4240	**681**	**4240**							
507.cactuBSSN_r	288	**320**	**1140**	320	1140	321	1130							
508.namd_r	288	**296**	**926**	296	925	295	927							
510.parest_r	288	1888	399	**1889**	**399**	1892	398							
511.povray_r	288	460	1460	**454**	**1480**	439	1530							
519.lbm_r	288	**945**	**321**	944	321	945	321							
521.wrf_r	288	986	654	**986**	**654**	988	653							
526.blender_r	288	474	925	**476**	**921**	478	917							
527.cam4_r	288	425	1180	**426**	**1180**	426	1180							
538.imagick_r	288	132	5450	**133**	**5400**	134	5350							
544.nab_r	288	283	1710	287	1690	**284**	**1700**							
549.fotonik3d_r	288	1715	654	**1717**	**654**	1719	653							
554.roms_r	288	1298	353	1301	352	**1301**	**352**							

SPECrate®2017_fp_base = 1020

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.1/lib/intel64:/home/cpu2017-1.1.9-ic2024.1/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Adjacent Cache Prefetch set to Disabled

 Sysinfo program /home/cpu2017-1.1.9-ic2024.1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Tue Oct 29 03:35:17 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-32.el9_4)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
   2024 x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    03:35:17 up 3 min,  0 users,  load average: 0.09, 0.04, 0.01
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT

 ------------------------------------------------------------
 3. Username
   From environment variable $USER:  root
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 4126744
  max locked memory           (kbytes, -l) unlimited
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 102400
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 4126744
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 31
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash ./02.remote_local_SPECcpu_1.01.sh
 sh Run703-compliant-ic2024.1-lin-sierraforest-ratefp-base-20240308.sh
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 -c
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=144 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base -o all fprate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 --configfile
   ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define peakfpcopies=144 --define
   physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base
   --output_format all --nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv
   --logfile $SPEC/tmp/CPU2017.580/templogs/preenv.fprate.580.0.log --lognum 580.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6766E
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 175
    stepping        : 3
    microcode       : 0x3000270
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 144
    siblings        : 144
    2 physical ids (chips)
    288 processors (hardware threads)
    physical id 0: core ids 0-143
    physical id 1: core ids 0-143
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110,112,114,116,118,120,122,124,126,128,130,1
    32,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,18
    4,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,232,234,236
```

(Continued on next page)

Platform Notes (Continued)

```
     ,238,240,242,244,246,248,250,252,254,256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286
     physical id 1: apicids
     512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
     64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,596,598,600,602,604,606,608,610,612,614,61
     6,618,620,622,624,626,628,630,632,634,636,638,640,642,644,646,648,650,652,654,656,658,660,662,664,666,668
     ,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712,714,716,718,720,
     722,724,726,728,730,732,734,736,738,740,742,744,746,748,750,752,754,756,758,760,762,764,766,768,770,772,7
     74,776,778,780,782,784,786,788,790,792,794,796,798
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 48 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               288
   On-line CPU(s) list:                  0-287
   Vendor ID:                            GenuineIntel
   BIOS Vendor ID:                       Intel(R) Corporation
   Model name:                           Intel(R) Xeon(R) 6766E
   BIOS Model name:                      Intel(R) Xeon(R) 6766E
   CPU family:                           6
   Model:                                175
   Thread(s) per core:                   1
   Core(s) per socket:                   144
   Socket(s):                            2
   Stepping:                             3
   BogoMIPS:                             3800.00
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                         clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                                         rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                                         xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                                         dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                         pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                                         avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                                         cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                         flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                                         erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb intel_pt sha_ni
                                         xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                         cqm_mbm_local split_lock_detect avx_vnni lam wbnoinvd dtherm ida arat
                                         pln pts vnmi umip pku ospke waitpkg gfni vaes vpclmulqdq tme rdpid
                                         bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                         serialize pconfig arch_lbr ibt flush_l1d arch_capabilities
   Virtualization:                       VT-x
   L1d cache:                            9 MiB (288 instances)
   L1i cache:                            18 MiB (288 instances)
   L2 cache:                             288 MiB (72 instances)
   L3 cache:                             216 MiB (2 instances)
   NUMA node(s):                         2
   NUMA node0 CPU(s):                    0-143
   NUMA node1 CPU(s):                    144-287
   Vulnerability Gather data sampling:   Not affected
   Vulnerability Itlb multihit:          Not affected
   Vulnerability L1tf:                   Not affected
   Vulnerability Mds:                    Not affected
   Vulnerability Meltdown:               Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Mmio stale data:      Not affected
  Vulnerability Retbleed:             Not affected
  Vulnerability Spec rstack overflow: Not affected
  Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:           Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:           Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                                      PBRSB-eIBRS Not affected
  Vulnerability Srbds:                Not affected
  Vulnerability Tsx async abort:      Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       9M    8 Data            1     64        1             64
     L1i       64K      18M    8 Instruction     1    128        1             64
     L2         4M     288M   16 Unified         2   4096        1             64
     L3       108M     216M   12 Unified         3 147456        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-143
  node 0 size: 515692 MB
  node 0 free: 514144 MB
  node 1 cpus: 144-287
  node 1 size: 516033 MB
  node 1 free: 514644 MB
  node distances:
  node   0   1
    0:  10  21
    1:  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056486892 kB

------------------------------------------------------------
10. who -r
  run-level 3 Oct 29 03:32

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-32.el9_4)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
                   dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
                   mdmonitor microcode nis-domainname nvmefc-boot-connections rhsmcertd rsyslog rtkit-daemon
                   selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2
                   upower
  enabled-runtime  systemd-remount-fs
  disabled         canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot
                   chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade
                   kvm_stat man-db-restart-cache-update nftables nvmf-autoconnect pesign rdisc rhcd rhsm
                   rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@
                   systemd-boot-check-no-failures systemd-pstore systemd-sysext
  generated        jexec
```

(Continued on next page)

Platform Notes (Continued)

```
  indirect         sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
                   systemd-sysupdate-reboot

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/boot/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
  root=UUID=218263b5-b938-4bb9-acd2-fdd6e13af967
  ro
  resume=UUID=28b98cc0-6b11-4f02-b151-4d764447b0f5

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 76:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
```

(Continued on next page)

Platform Notes (Continued)

```
  os-release     Red Hat Enterprise Linux 9.4 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
  system-release Red Hat Enterprise Linux release 9.4 (Plow)

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-ic2024.1
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p4 xfs   3.5T   42G  3.4T   2% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR630 V4
    Product Family: ThinkSystem
    Serial:         0987654321

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    12x SK Hynix HMCG94AHBRA275N 64 GB 2 rank 6400
    4x SK Hynix HMCG94AHBRA281N 64 GB 2 rank 6400


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:
   BIOS Version:      IHE107B-1.10
   BIOS Date:         09/11/2024
   BIOS Revision:     1.10
   Firmware Revision: 1.0
```

Compiler Version Notes

```
==============================================================================================================
C              | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++            | 508.namd_r(base) 510.parest_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C         | 511.povray_r(base) 526.blender_r(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base) 527.cam4_r(base)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using both C and C++:
`icpx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-B.html
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Birchstream-B.xml
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-28 15:35:16-0400.
Report generated on 2024-11-20 11:15:18 by CPU2017 PS formatter v6716.
Originally published on 2024-11-19.