SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11
(3.30 GHz, AMD EPYC 9575F)

SPECrate®2017_fp_base = 1680

SPECrate®2017_fp_peak = 1690

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Nov-2024
Hardware Availability: Nov-2024
Software Availability: Sep-2024

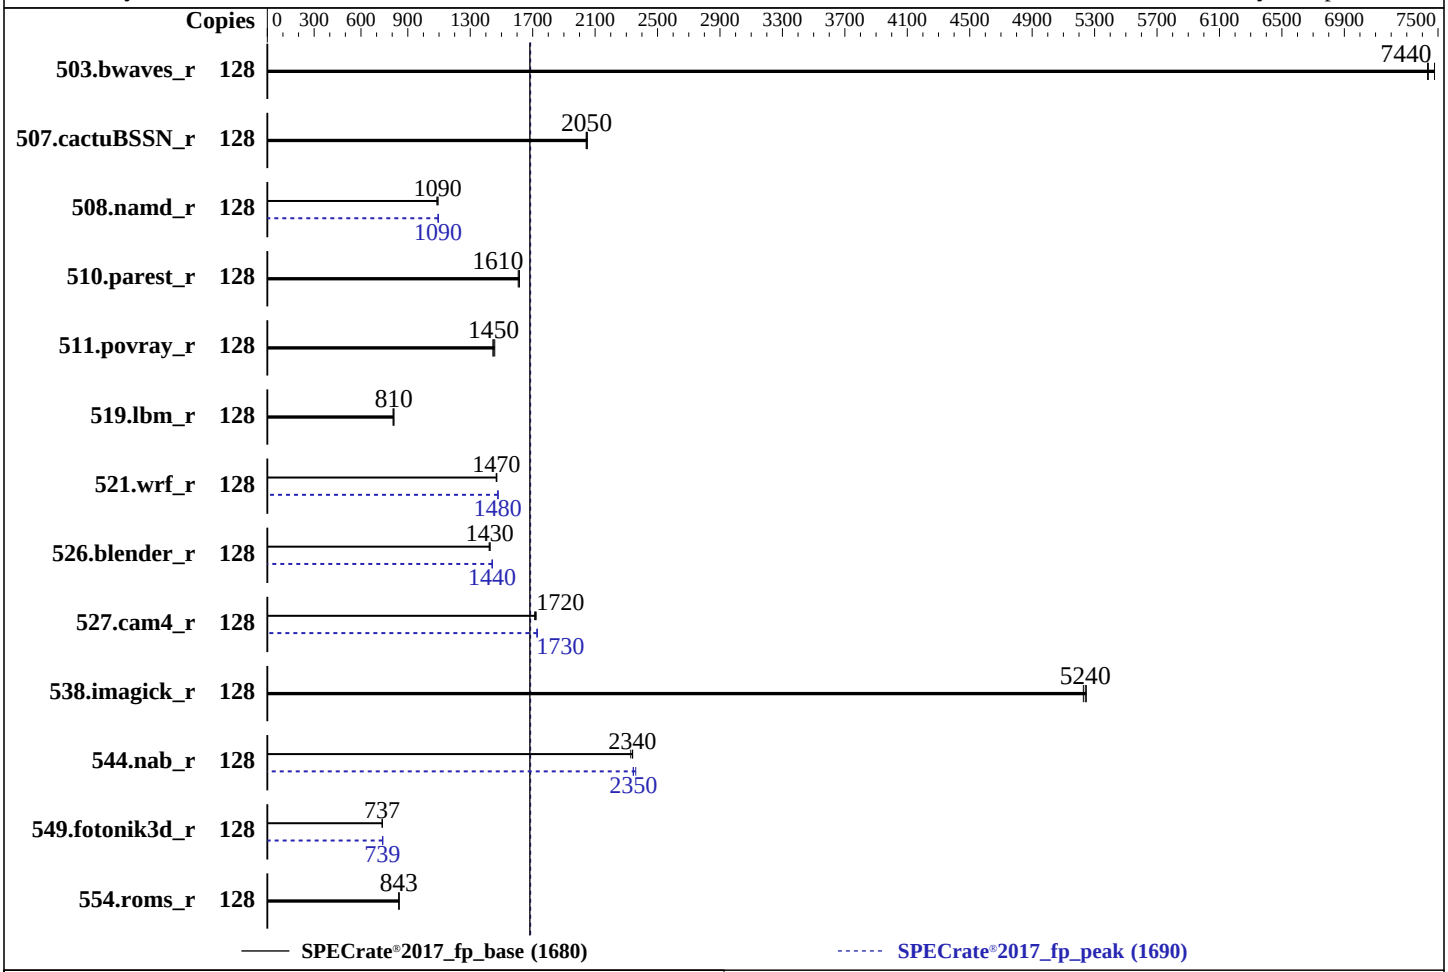

Hardware

CPU Name:	AMD EPYC 9575F
Max MHz:	5000
Nominal:	3300
Enabled:	128 cores, 2 chips
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)
Storage:	1 x 480 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.21-default
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	HPE BIOS Version v2.10 09/11/2024 released Sep-2024
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	172	7480	173	7430	**173**	**7440**	128	172	7480	173	7430	**173**	**7440**
507.cactuBSSN_r	128	**79.2**	**2050**	79.0	2050	79.3	2040	128	**79.2**	**2050**	79.0	2050	79.3	2040
508.namd_r	128	112	1090	111	1090	**111**	**1090**	128	111	1090	111	1100	**111**	**1090**
510.parest_r	128	**208**	**1610**	208	1610	207	1610	128	**208**	**1610**	208	1610	207	1610
511.povray_r	128	205	1460	207	1440	**206**	**1450**	128	205	1460	207	1440	**206**	**1450**
519.lbm_r	128	**167**	**810**	166	811	168	805	128	**167**	**810**	166	811	168	805
521.wrf_r	128	**195**	**1470**	195	1470	196	1470	128	194	1480	**194**	**1480**	194	1480
526.blender_r	128	137	1420	137	1430	**137**	**1430**	128	**135**	**1440**	135	1440	135	1440
527.cam4_r	128	131	1710	**130**	**1720**	130	1720	128	**129**	**1730**	130	1730	129	1730
538.imagick_r	128	**60.7**	**5240**	60.9	5230	60.7	5250	128	**60.7**	**5240**	60.9	5230	60.7	5250
544.nab_r	128	**92.1**	**2340**	92.5	2330	92.1	2340	128	**91.9**	**2350**	91.3	2360	91.9	2340
549.fotonik3d_r	128	678	736	**677**	**737**	677	737	128	675	739	**675**	**739**	675	739
554.roms_r	128	241	845	**241**	**843**	241	843	128	241	845	**241**	**843**	241	843

SPECrate®2017_fp_base = 1680

SPECrate®2017_fp_peak = 1690

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
      "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
 BIOS Configuration
 Workload Profile set to General Throughput Compute
 Determinism Control set to Manual
 Performance Determinism set to Power Deterministic
 Memory Patrol Scrubbing set to Disabled
 ACPI CST C2 Latency set to 18 microseconds
 Thermal Configuration set to Maximum Cooling
 NUMA memory domains per socket set to Four memory domains per socket
 Package Power Limit Control Mode set to Manual
 Package Power Limit Value set to 400
 AMD SMT Option set to Disabled
 Last-Level Cache (LLC) as NUMA Node set to Enabled
 Workload Profile set to Custom
  Power Regulator set to OS Control Mode
 The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.0

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Fri Nov  8 09:56:59 2024

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
```

(Continued on next page)

Platform Notes (Continued)

```
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
   Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
   x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
    09:56:59 up 3 min,  1 user,  load average: 0.93, 0.43, 0.17
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     pts/0    172.17.1.109     22Apr24 15.00s  0.88s  0.20s /bin/bash ./amd_rate_aocc500_znver5_A1.sh

------------------------------------------------------------
3. Username
   From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 3094504
   max locked memory       (kbytes, -l) 2097152
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 3094504
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize=31
  sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
  sshd: root [priv]
  sshd: root@pts/0
  -bash
```

(Continued on next page)

Platform Notes (Continued)

```
 python3 ./run_fprate.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.031/templogs/preenv.fprate.031.0.log --lognum 031.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9575F 64-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb002116
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 64
    siblings        : 64
    2 physical ids (chips)
    128 processors (hardware threads)
    physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
    physical id 1: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
    physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
    physical id 1: apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               128
  On-line CPU(s) list:                  0-127
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
  Model name:                           AMD EPYC 9575F 64-Core Processor
  BIOS Model name:                      AMD EPYC 9575F 64-Core Processor                CPU @ 3.3GHz
  BIOS CPU family:                      107
  CPU family:                           26
  Model:                                2
  Thread(s) per core:                   1
  Core(s) per socket:                   64
  Socket(s):                            2
  Stepping:                             1
  Frequency boost:                      enabled
  CPU(s) scaling MHz:                   102%
  CPU max MHz:                          3300.0000
  CPU min MHz:                          1500.0000
  BogoMIPS:                             6590.54
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
```

(Continued on next page)

Platform Notes (Continued)

```
                                 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                 cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                 osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                 perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                 ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                 avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                 xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                 cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                 xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                 nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                 pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                 avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                 avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                 movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                 flush_l1d debug_swap
  Virtualization:                AMD-V
  L1d cache:                     6 MiB (128 instances)
  L1i cache:                     4 MiB (128 instances)
  L2 cache:                      128 MiB (128 instances)
  L3 cache:                      512 MiB (16 instances)
  NUMA node(s):                  16
  NUMA node0 CPU(s):             0-7
  NUMA node1 CPU(s):             8-15
  NUMA node2 CPU(s):             16-23
  NUMA node3 CPU(s):             24-31
  NUMA node4 CPU(s):             32-39
  NUMA node5 CPU(s):             40-47
  NUMA node6 CPU(s):             48-55
  NUMA node7 CPU(s):             56-63
  NUMA node8 CPU(s):             64-71
  NUMA node9 CPU(s):             72-79
  NUMA node10 CPU(s):            80-87
  NUMA node11 CPU(s):            88-95
  NUMA node12 CPU(s):            96-103
  NUMA node13 CPU(s):            104-111
  NUMA node14 CPU(s):            112-119
  NUMA node15 CPU(s):            120-127
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                 disabled; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

 From lscpu --cache:
      NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
      L1d       48K       6M   12 Data            1    64        1             64
      L1i       32K       4M    8 Instruction     1    64        1             64
      L2         1M     128M   16 Unified         2  1024        1             64
      L3        32M     512M   16 Unified         3 32768        1             64
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0-7
  node 0 size: 48062 MB
  node 0 free: 47778 MB
  node 1 cpus: 8-15
  node 1 size: 48381 MB
  node 1 free: 48095 MB
  node 2 cpus: 16-23
  node 2 size: 48381 MB
  node 2 free: 48207 MB
  node 3 cpus: 24-31
  node 3 size: 48381 MB
  node 3 free: 48229 MB
  node 4 cpus: 32-39
  node 4 size: 48381 MB
  node 4 free: 48207 MB
  node 5 cpus: 40-47
  node 5 size: 48343 MB
  node 5 free: 48161 MB
  node 6 cpus: 48-55
  node 6 size: 48381 MB
  node 6 free: 48232 MB
  node 7 cpus: 56-63
  node 7 size: 48381 MB
  node 7 free: 48183 MB
  node 8 cpus: 64-71
  node 8 size: 48381 MB
  node 8 free: 48231 MB
  node 9 cpus: 72-79
  node 9 size: 48381 MB
  node 9 free: 48222 MB
  node 10 cpus: 80-87
  node 10 size: 48381 MB
  node 10 free: 48239 MB
  node 11 cpus: 88-95
  node 11 size: 48381 MB
  node 11 free: 48213 MB
  node 12 cpus: 96-103
  node 12 size: 48381 MB
  node 12 free: 48236 MB
  node 13 cpus: 104-111
  node 13 size: 48381 MB
  node 13 free: 48208 MB
  node 14 cpus: 112-119
  node 14 size: 48381 MB
  node 14 free: 48227 MB
  node 15 cpus: 120-127
  node 15 size: 48282 MB
  node 15 free: 48140 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
    0:  10  11  12  12  12  12  12  12  32  32  32  32  32  32  32  32
    1:  11  10  12  12  12  12  12  12  32  32  32  32  32  32  32  32
    2:  12  12  10  11  12  12  12  12  32  32  32  32  32  32  32  32
    3:  12  12  11  10  12  12  12  12  32  32  32  32  32  32  32  32
    4:  12  12  12  12  10  11  12  12  32  32  32  32  32  32  32  32
```

(Continued on next page)

Platform Notes (Continued)

```
     5:  12  12  12  12  11  10  12  12  32  32  32  32  32  32  32  32
     6:  12  12  12  12  12  12  10  11  32  32  32  32  32  32  32  32
     7:  12  12  12  12  12  12  11  10  32  32  32  32  32  32  32  32
     8:  32  32  32  32  32  32  32  32  10  11  12  12  12  12  12  12
     9:  32  32  32  32  32  32  32  32  11  10  12  12  12  12  12  12
    10:  32  32  32  32  32  32  32  32  12  12  10  11  12  12  12  12
    11:  32  32  32  32  32  32  32  32  12  12  11  10  12  12  12  12
    12:  32  32  32  32  32  32  32  32  12  12  12  12  10  11  12  12
    13:  32  32  32  32  32  32  32  32  12  12  12  12  11  10  12  12
    14:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  10  11
    15:  32  32  32  32  32  32  32  32  12  12  12  12  12  12  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792218616 kB

------------------------------------------------------------
10. who -r
  run-level 3 Apr 22 17:45

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
                   purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
                   wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
                   grub2-once haveged hwloc-dump-hwdata issue-add-ssh-keys kexec-load lunmask rpmconfigcheck
                   serial-getty@ systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-sysext systemd-time-wait-sync systemd-timesyncd
  indirect         pcscd systemd-userdbd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=4bcae1f8-16cc-4194-a8eb-e8f8705e985c
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 15:
    current policy: frequency should be within 1.50 GHz and 3.30 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
```

(Continued on next page)

Platform Notes (Continued)

```
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/sda2      btrfs  445G   28G  413G   7% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         HPE
    Product:        ProLiant DL365 Gen11
    Product Family: ProLiant
    Serial:         DL365G11-001

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
```

(Continued on next page)

Platform Notes (Continued)

```
  Memory:
    24x Hynix HMCG88AHBRA471N 32 GB 2 rank 6400, configured at 6000


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       HPE
    BIOS Version:      2.10
    BIOS Date:         09/11/2024
    BIOS Revision:     2.10
    Firmware Revision: 1.62
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==========================================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
--------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==========================================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
--------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-lflang -ldl

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Benchmarks using both C and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

519.lbm_r: `basepeak = yes`

538.imagick_r: `basepeak = yes`

544.nab_r: `-m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

C++ benchmarks:

508.namd_r: `-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

510.parest_r: `basepeak = yes`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -Mrecursive -mllvm -reduce-array-computations=3 -fepilog-vectorization-of-inductions -fvector-transform -fscalar-transform -lamdlibm -lamdalloc -ldl -lflang`

554.roms_r: `basepeak = yes`

Benchmarks using both Fortran and C:

521.wrf_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50`

(Continued on next page)

Peak Optimization Flags (Continued)

521.wrf_r (continued):
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Peak Other Flags (Continued)

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc500-flags.html`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc500-flags.xml`
`http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.0.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-07 23:11:59-0500.
Report generated on 2024-12-05 10:03:16 by CPU2017 PS formatter v6716.
Originally published on 2024-12-03.