SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

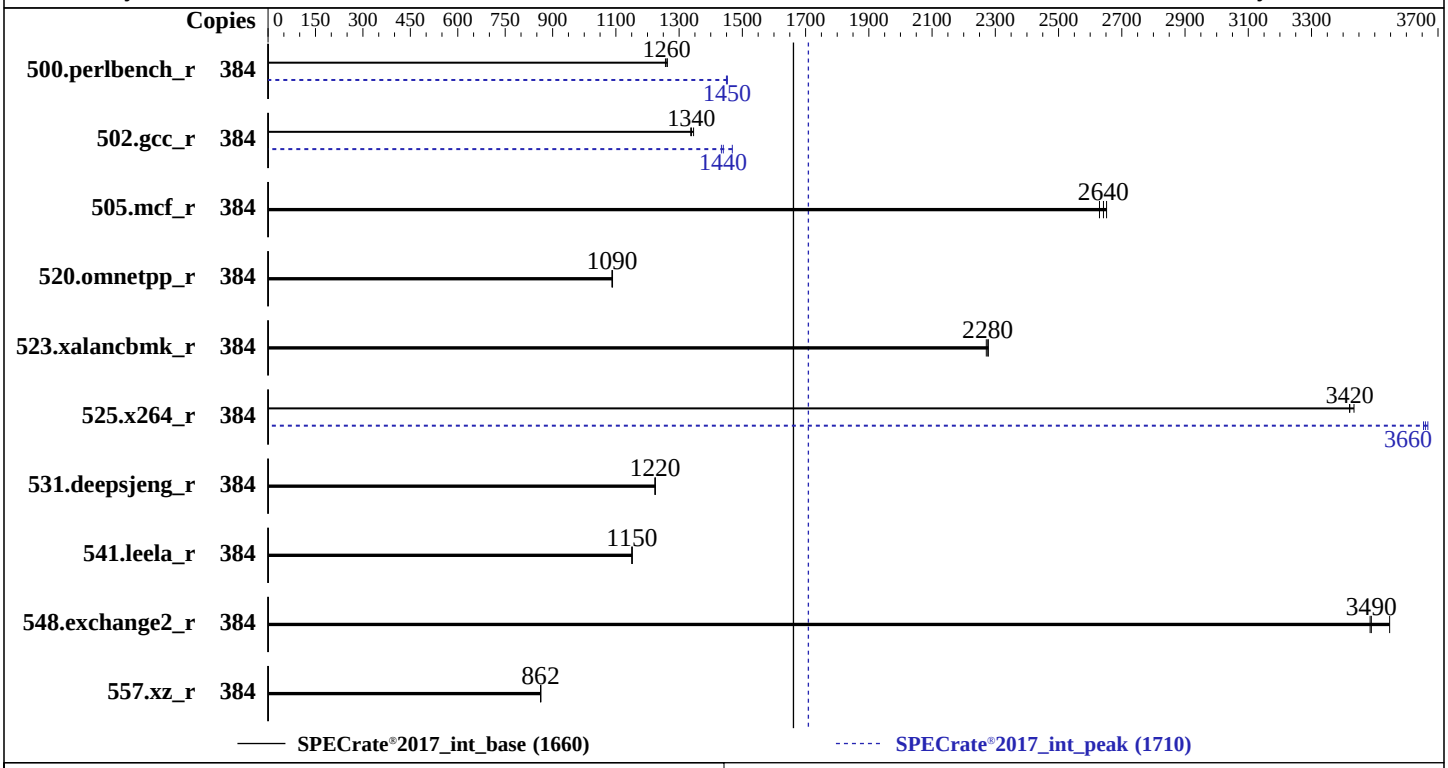

Hardware

CPU Name:	Intel Xeon Platinum 8468H
Max MHz:	3800
Nominal:	2100
Enabled:	192 cores, 4 chips, 2 threads/core
Orderable:	1,2,4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
Storage:	1 x 480 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 01.02.02.05 released Oct-2024
File System:	xfs
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8468H)

SPECrate®2017_int_base = 1660

SPECrate®2017_int_peak = 1710

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Nov-2024
Hardware Availability: May-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	484	1260	**485**	**1260**	486	1260	384	421	1450	**421**	**1450**	422	1450
502.gcc_r	384	407	1340	404	1350	**406**	**1340**	384	370	1470	379	1430	**378**	**1440**
505.mcf_r	384	**235**	**2640**	236	2630	234	2650	384	**235**	**2640**	236	2630	234	2650
520.omnetpp_r	384	463	1090	462	1090	**463**	**1090**	384	463	1090	462	1090	**463**	**1090**
523.xalancbmk_r	384	**178**	**2280**	179	2270	178	2280	384	**178**	**2280**	179	2270	178	2280
525.x264_r	384	196	3430	**197**	**3420**	197	3420	384	**184**	**3660**	183	3670	184	3650
531.deepsjeng_r	384	359	1220	**359**	**1220**	360	1220	384	359	1220	**359**	**1220**	360	1220
541.leela_r	384	552	1150	553	1150	**552**	**1150**	384	552	1150	553	1150	**552**	**1150**
548.exchange2_r	384	284	3550	**288**	**3490**	289	3490	384	284	3550	**288**	**3490**	289	3490
557.xz_r	384	481	863	**481**	**862**	481	862	384	481	863	**481**	**862**	481	862

SPECrate®2017_int_base = **1660**

SPECrate®2017_int_peak = **1710**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

(Continued on next page)

General Notes (Continued)

```
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC4 (4-clusters)

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Nov 29 09:56:23 2024

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   09:56:23 up 3 min,  2 users,  load average: 0.20, 0.16, 0.07
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     :1        09:54   ?xdm?  31:42   0.00s /usr/libexec/gdm-x-session --register-session --run-script
  gnome-session
  root     pts/0     09:54   29.00s  1.10s  0.02s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
```


(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 4124863
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 4124863
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@pts/0
 -bash
 /bin/sh ./run_rate.sh
 runcpu --define default-platform-flags --copies 384 -c ic2024.0.2-lin-sierraforest-rate-20231213.cfg
   --define smt-on --define cores=192 --define physicalfirst --define invoke_with_interleave --define
   drop_caches --tune base,peak -o all intrate
 runcpu --define default-platform-flags --copies 384 --configfile
   ic2024.0.2-lin-sierraforest-rate-20231213.cfg --define smt-on --define cores=192 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
   --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.003/templogs/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8468H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b000590
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 48
    siblings        : 96
    4 physical ids (chips)
    384 processors (hardware threads)
    physical id 0: core ids 0-47
    physical id 1: core ids 0-47
    physical id 2: core ids 0-47
    physical id 3: core ids 0-47
    physical id 0: apicids 0-95
    physical id 1: apicids 128-223
    physical id 2: apicids 256-351
```

(Continued on next page)

Platform Notes (Continued)

```
    physical id 3: apicids 384-479
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          384
  On-line CPU(s) list:             0-383
  Vendor ID:                       GenuineIntel
  BIOS Vendor ID:                  Intel(R) Corporation
  Model name:                      Intel(R) Xeon(R) Platinum 8468H
  BIOS Model name:                 Intel(R) Xeon(R) Platinum 8468H
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              2
  Core(s) per socket:              48
  Socket(s):                       4
  Stepping:                        8
  BogoMIPS:                        4200.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                                   vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                   x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                   abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                   intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                                   flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
                                   invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                   clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                                   xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                   avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
                                   ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                   tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                   enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                   amx_tile flush_l1d arch_capabilities
  Virtualization:                  VT-x
  L1d cache:                       9 MiB (192 instances)
  L1i cache:                       6 MiB (192 instances)
  L2 cache:                        384 MiB (192 instances)
  L3 cache:                        420 MiB (4 instances)
  NUMA node(s):                    16
  NUMA node0 CPU(s):               0-11,192-203
  NUMA node1 CPU(s):               12-23,204-215
  NUMA node2 CPU(s):               24-35,216-227
  NUMA node3 CPU(s):               36-47,228-239
  NUMA node4 CPU(s):               48-59,240-251
  NUMA node5 CPU(s):               60-71,252-263
  NUMA node6 CPU(s):               72-83,264-275
  NUMA node7 CPU(s):               84-95,276-287
  NUMA node8 CPU(s):               96-107,288-299
  NUMA node9 CPU(s):               108-119,300-311
  NUMA node10 CPU(s):              120-131,312-323
  NUMA node11 CPU(s):              132-143,324-335
```

(Continued on next page)

Platform Notes (Continued)

```
  NUMA node12 CPU(s):              144-155,336-347
  NUMA node13 CPU(s):              156-167,348-359
  NUMA node14 CPU(s):              168-179,360-371
  NUMA node15 CPU(s):              180-191,372-383
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       9M   12 Data            1     64        1             64
     L1i       32K       6M    8 Instruction     1     64        1             64
     L2         2M     384M   16 Unified         2   2048        1             64
     L3       105M     420M   15 Unified         3 114688        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0-11,192-203
  node 0 size: 63739 MB
  node 0 free: 62884 MB
  node 1 cpus: 12-23,204-215
  node 1 size: 64506 MB
  node 1 free: 64178 MB
  node 2 cpus: 24-35,216-227
  node 2 size: 64506 MB
  node 2 free: 64111 MB
  node 3 cpus: 36-47,228-239
  node 3 size: 64506 MB
  node 3 free: 64169 MB
  node 4 cpus: 48-59,240-251
  node 4 size: 64506 MB
  node 4 free: 64192 MB
  node 5 cpus: 60-71,252-263
  node 5 size: 64506 MB
  node 5 free: 64191 MB
  node 6 cpus: 72-83,264-275
  node 6 size: 64506 MB
  node 6 free: 63817 MB
  node 7 cpus: 84-95,276-287
  node 7 size: 64470 MB
  node 7 free: 64153 MB
  node 8 cpus: 96-107,288-299
  node 8 size: 64506 MB
  node 8 free: 64168 MB
  node 9 cpus: 108-119,300-311
  node 9 size: 64506 MB
  node 9 free: 64174 MB
  node 10 cpus: 120-131,312-323
  node 10 size: 64506 MB
  node 10 free: 64256 MB
  node 11 cpus: 132-143,324-335
  node 11 size: 64506 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 11 free: 64161 MB
  node 12 cpus: 144-155,336-347
  node 12 size: 64506 MB
  node 12 free: 64142 MB
  node 13 cpus: 156-167,348-359
  node 13 size: 64506 MB
  node 13 free: 63959 MB
  node 14 cpus: 168-179,360-371
  node 14 size: 64506 MB
  node 14 free: 62388 MB
  node 15 cpus: 180-191,372-383
  node 15 size: 64477 MB
  node 15 free: 64128 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
    0:  10  12  12  12  21  21  21  21  21  21  21  21  21  21  21  21
    1:  12  10  12  12  21  21  21  21  21  21  21  21  21  21  21  21
    2:  12  12  10  12  21  21  21  21  21  21  21  21  21  21  21  21
    3:  12  12  12  10  21  21  21  21  21  21  21  21  21  21  21  21
    4:  21  21  21  21  10  12  12  12  21  21  21  21  21  21  21  21
    5:  21  21  21  21  12  10  12  12  21  21  21  21  21  21  21  21
    6:  21  21  21  21  12  12  10  12  21  21  21  21  21  21  21  21
    7:  21  21  21  21  12  12  12  10  21  21  21  21  21  21  21  21
    8:  21  21  21  21  21  21  21  21  10  12  12  12  21  21  21  21
    9:  21  21  21  21  21  21  21  21  12  10  12  12  21  21  21  21
   10:  21  21  21  21  21  21  21  21  12  12  10  12  21  21  21  21
   11:  21  21  21  21  21  21  21  21  12  12  12  10  21  21  21  21
   12:  21  21  21  21  21  21  21  21  21  21  21  21  10  12  12  12
   13:  21  21  21  21  21  21  21  21  21  21  21  21  12  10  12  12
   14:  21  21  21  21  21  21  21  21  21  21  21  21  12  12  10  12
   15:  21  21  21  21  21  21  21  21  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056026856 kB

------------------------------------------------------------
10. who -r
  run-level 5 Nov 29 09:54

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth crond cups dbus-broker firewalld gdm
                   getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
                   low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                   nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
                   rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
                   systemd-network-generator udisks2 upower vgauthd vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd cni-dhcp console-getty cpupower
                   cups-browsed dbus-daemon debug-shell dnsmasq hwloc-dump-hwdata iprdump iprinit iprupdate
                   iscsid iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update nftables
```

(Continued on next page)

Platform Notes (Continued)

```
                  nvmf-autoconnect podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon
                  rdisc rhcd rhsm rhsm-facts rpmdb-rebuild serial-getty@ speech-dispatcherd sshd-keygen@
                  systemd-boot-check-no-failures systemd-pstore systemd-sysext wpa_supplicant
  indirect        spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
```

(Continued on next page)

Platform Notes (Continued)

```
   max_ptes_swap             64
   pages_to_scan           4096
   scan_sleep_millisecs   10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release     Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
  system-release Red Hat Enterprise Linux release 9.0 (Plow)

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem            Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   201G   18G  184G   9% /home

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         XFUSION
    Product:        2488H V7
    Product Family: EagleStream

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       XFUSION
   BIOS Version:      01.02.02.05
   BIOS Date:         10/17/2024
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

========================================================================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

541.leela_r: `-DSPEC_LP64`
548.exchange2_r: `-DSPEC_LP64`
557.xz_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
`-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc`

C++ benchmarks:
`-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc`

Fortran benchmarks:
`-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte -auto -L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc`

Peak Compiler Invocation

C benchmarks:
`icx`

C++ benchmarks:
`icpx`

Fortran benchmarks:
`ifx`

Peak Portability Flags

500.perlbench_r: `-DSPEC_LP64 -DSPEC_LINUX_X64`
502.gcc_r: `-D_FILE_OFFSET_BITS=64`
505.mcf_r: `-DSPEC_LP64`
520.omnetpp_r: `-DSPEC_LP64`

(Continued on next page)

Peak Portability Flags (Continued)

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.0/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-11-28 20:56:22-0500.
Report generated on 2024-12-18 18:25:31 by CPU2017 PS formatter v6716.
Originally published on 2024-12-17.