SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Platinum 8458P)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

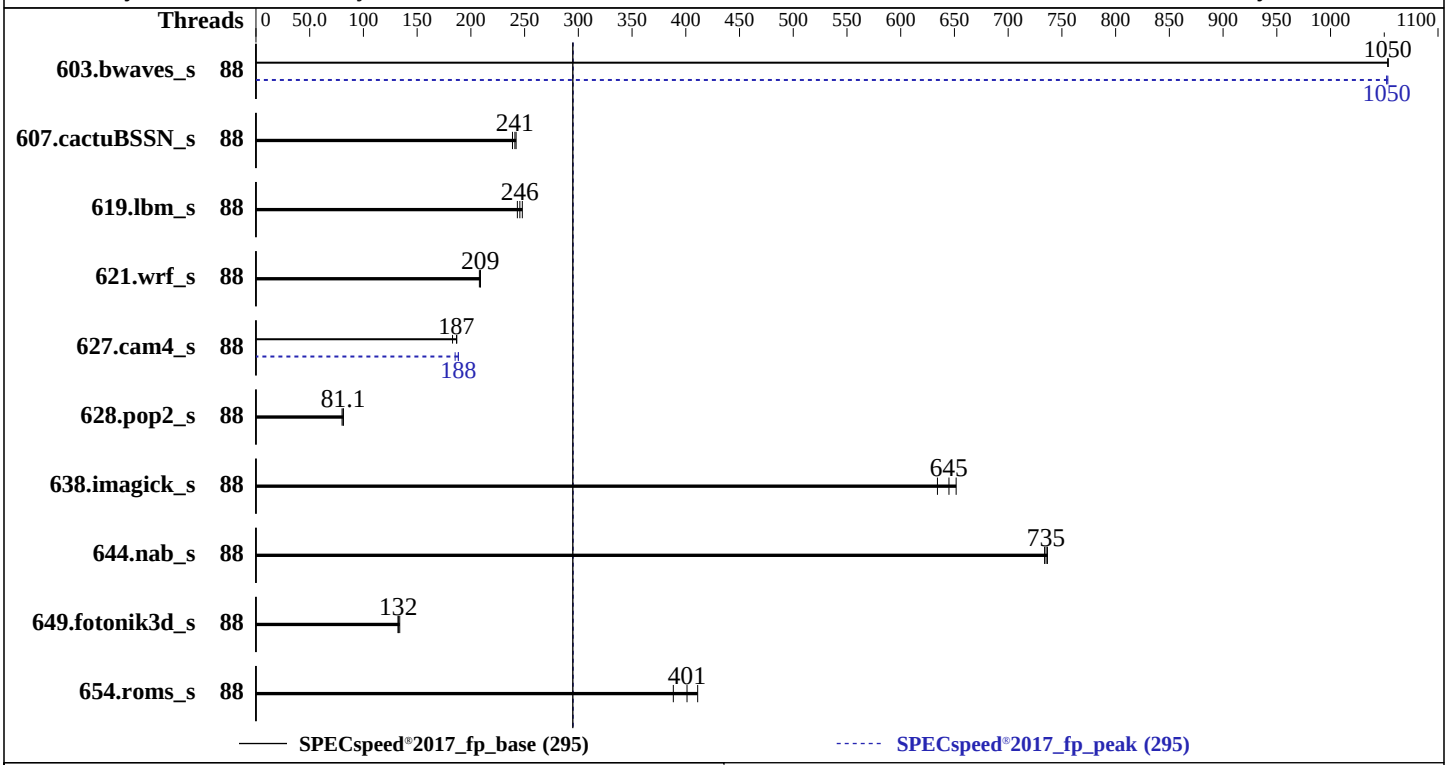

Hardware

CPU Name:	Intel Xeon Platinum 8458P
Max MHz:	3800
Nominal:	2700
Enabled:	88 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	82.5 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	960 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 22.04.4 LTS 6.8.0-47-generic
Compiler:	C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version EG0.10.01 released Mar-2024
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Fusionstor

(Test Sponsor: Meganet)

Invento i6000 (Intel Xeon Platinum 8458P)

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

CPU2017 License: 6221
Test Sponsor: Meganet
Tested by: Fusionstor system

Test Date: Oct-2024
Hardware Availability: Feb-2023
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	88	**56.0**	**1050**	56.0	1050	56.0	1050	88	56.0	1050	56.1	1050	**56.1**	**1050**
607.cactuBSSN_s	88	68.9	242	**69.2**	**241**	69.8	239	88	68.9	242	**69.2**	**241**	69.8	239
619.lbm_s	88	21.5	243	**21.3**	**246**	21.1	248	88	21.5	243	**21.3**	**246**	21.1	248
621.wrf_s	88	63.3	209	**63.3**	**209**	63.6	208	88	63.3	209	**63.3**	**209**	63.6	208
627.cam4_s	88	47.4	187	**47.5**	**187**	48.4	183	88	47.0	188	**47.1**	**188**	47.8	185
628.pop2_s	88	146	81.4	**146**	**81.1**	148	80.1	88	146	81.4	**146**	**81.1**	148	80.1
638.imagick_s	88	22.1	652	**22.4**	**645**	22.7	634	88	22.1	652	**22.4**	**645**	22.7	634
644.nab_s	88	23.7	737	23.8	734	**23.8**	**735**	88	23.7	737	23.8	734	**23.8**	**735**
649.fotonik3d_s	88	**68.8**	**132**	68.1	134	68.9	132	88	**68.8**	**132**	68.1	134	68.9	132
654.roms_s	88	38.3	411	**39.3**	**401**	40.5	388	88	38.3	411	**39.3**	**401**	40.5	388

SPECspeed®2017_fp_base = 295

SPECspeed®2017_fp_peak = 295

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/speccpu/cpu2017/lib/intel64:/home/speccpu/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Configuration
SNC (Sub NUMA) set to Enable SNC4 (4-Clusters)

 Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on intel Fri Oct 18 16:36:39 2024

 SUT (System Under Test) info as seen by some common utilities.
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux intel 6.8.0-47-generic #47~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Wed Oct  2 16:16:55 UTC 2 x86_64 x86_64
  x86_64 GNU/Linux

------------------------------------------------------------
2. w
   16:36:39 up 23:08,  2 users,  load average: 5.58, 6.81, 4.07
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  intel    :1       :1               Thu18   ?xdm?  31:43   0.00s /usr/libexec/gdm-x-session --run-script env
  GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
  intel    pts/1    -                12:30    4:06m  0.97s  0.00s sudo
  ./reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       intel

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 132055920
  process              4126443
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init splash
 /lib/systemd/systemd --user
 /usr/libexec/gnome-terminal-server
 bash
 sudo ./reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
 sudo ./reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
 sh ./reportable-ic2023.2.3-lin-sapphirerapids-speed-smt-on-20231121.sh
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=88 --tune base,peak -o all --define smt-on
   --define drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=88 --tune base,peak --output_format all
   --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
   --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.013/templogs/preenv.fpspeed.013.0.log --lognum 013.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8458P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b0005c0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi
    cpu cores       : 44
    siblings        : 88
    2 physical ids (chips)
    176 processors (hardware threads)
    physical id 0: core ids 0-43
    physical id 1: core ids 0-43
    physical id 0: apicids 0-87
    physical id 1: apicids 128-215
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               176
  On-line CPU(s) list:                  0-175
  Vendor ID:                            GenuineIntel
  Model name:                           Intel(R) Xeon(R) Platinum 8458P
  CPU family:                           6
  Model:                                143
  Thread(s) per core:                   2
  Core(s) per socket:                   44
  Socket(s):                            2
  Stepping:                             8
```

(Continued on next page)

Platform Notes (Continued)

```
  CPU max MHz:                          3800.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             5400.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                                        xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                        cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                        ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
                                        avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                                        sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                                        cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                                        user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                                        vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear
                                        serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
                                        amx_int8 flush_l1d arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            4.1 MiB (88 instances)
  L1i cache:                            2.8 MiB (88 instances)
  L2 cache:                             176 MiB (88 instances)
  L3 cache:                             165 MiB (2 instances)
  NUMA node(s):                         8
  NUMA node0 CPU(s):                    0-10,88-98
  NUMA node1 CPU(s):                    11-21,99-109
  NUMA node2 CPU(s):                    22-32,110-120
  NUMA node3 CPU(s):                    33-43,121-131
  NUMA node4 CPU(s):                    44-54,132-142
  NUMA node5 CPU(s):                    55-65,143-153
  NUMA node6 CPU(s):                    66-76,154-164
  NUMA node7 CPU(s):                    77-87,165-175
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                        PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     4.1M   12 Data            1    64        1             64
     L1i       32K     2.8M    8 Instruction     1    64        1             64
     L2         2M     176M   16 Unified         2  2048        1             64
     L3      82.5M     165M   15 Unified         3 90112        1             64

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-10,88-98
  node 0 size: 128622 MB
  node 0 free: 126523 MB
  node 1 cpus: 11-21,99-109
  node 1 size: 129016 MB
  node 1 free: 127738 MB
  node 2 cpus: 22-32,110-120
  node 2 size: 129016 MB
  node 2 free: 121514 MB
  node 3 cpus: 33-43,121-131
  node 3 size: 129016 MB
  node 3 free: 128190 MB
  node 4 cpus: 44-54,132-142
  node 4 size: 129016 MB
  node 4 free: 128366 MB
  node 5 cpus: 55-65,143-153
  node 5 size: 129016 MB
  node 5 free: 128400 MB
  node 6 cpus: 66-76,154-164
  node 6 size: 128973 MB
  node 6 free: 128403 MB
  node 7 cpus: 77-87,165-175
  node 7 size: 129008 MB
  node 7 free: 128390 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
    6:  21  21  21  21  12  12  10  12
    7:  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056447388 kB

------------------------------------------------------------
10. who -r
  run-level 5 Oct 17 17:28

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                                LOAD   ACTIVE SUB    DESCRIPTION
  * NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
```

(Continued on next page)

Platform Notes (Continued)

```
                  accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups
                  cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
                  irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon
                  rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore
                  systemd-resolved systemd-timesyncd teamviewerd thermald ua-reboot-cmds ubuntu-advantage
                  udisks2 ufw unattended-upgrades wpa_supplicant
  enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled        acpid brltty console-getty debug-shell nftables openvpn-client@ openvpn-server@ openvpn@
                  rsync rtkit-daemon serial-getty@ speech-dispatcherd systemd-boot-check-no-failures
                  systemd-network-generator systemd-networkd systemd-networkd-wait-online systemd-sysext
                  systemd-time-wait-sync tlp upower wpa_supplicant-nl80211@ wpa_supplicant-wired@
                  wpa_supplicant@
  generated       apport cpufrequtils loadcpufreq speech-dispatcher
  indirect        saned@ spice-vdagentd uuidd
  masked          alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
                  screen-cleanup sudo systemd-rfkill x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-47-generic
  root=UUID=073562bb-1438-42b9-adfa-6a6f7f3d3559
  ro
  quiet
  splash
  vt.handoff=7

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 122:
    current policy: frequency should be within 800 MHz and 3.80 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
```

(Continued on next page)

Platform Notes (Continued)

```
  defrag          always defer defer+madvise [madvise] never
  enabled         always [madvise] never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.4 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/speccpu/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      ext4  879G  682G  153G  82% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         Fusionstor
    Product:        Invento_i6000
    Product Family: SG_Intel_EagleStream
    Serial:         HQ3110001BDA03CD0002

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    16x NO DIMM NO DIMM
    16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      EG0.10.01
   BIOS Date:         03/22/2024
   BIOS Revision:     5.32
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
------------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
------------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
------------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

(Continued on next page)

Base Portability Flags (Continued)

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian -assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Peak Compiler Invocation

C benchmarks:
icx

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP

(Continued on next page)

Peak Optimization Flags (Continued)

627.cam4_s (continued):
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html
http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml
http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-Intel-ICX-rev6.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-18 07:06:39-0400.
Report generated on 2025-01-07 11:51:06 by CPU2017 PS formatter v6716.
Originally published on 2025-01-07.