



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8450H)

SPECrate®2017_int_base = 913

SPECrate®2017_int_peak = 940

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Feb-2025

Hardware Availability: May-2023

Software Availability: Dec-2023

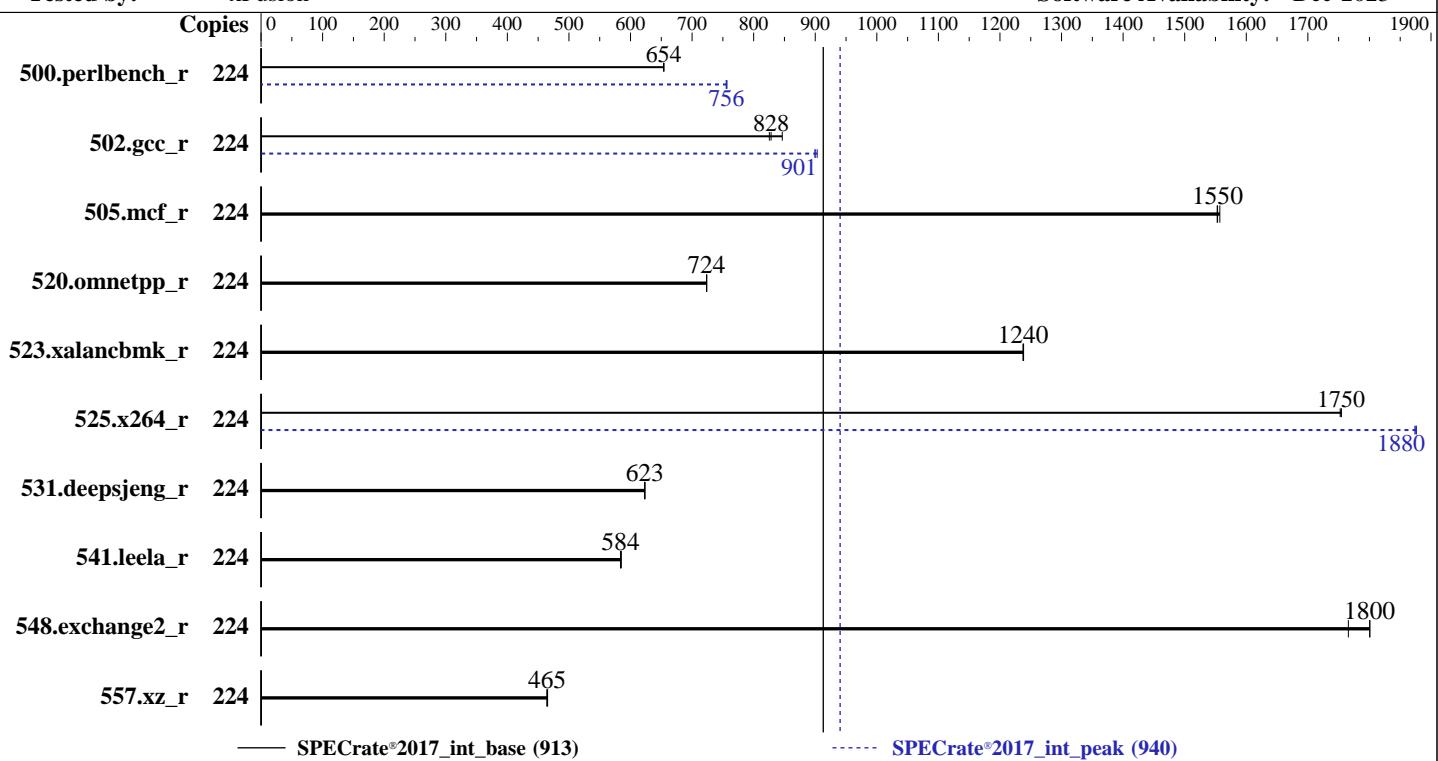

Hardware

CPU Name: Intel Xeon Platinum 8450H
 Max MHz: 3500
 Nominal: 2000
 Enabled: 112 cores, 4 chips, 2 threads/core
 Orderable: 1,2,4 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 75 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Compiler: 5.14.0-70.13.1.el9_0.x86_64
 C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 01.02.03.03 released Nov-2024
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECCrate®2017_int_base = 913

SPECCrate®2017_int_peak = 940

CPU2017 License: 6488

Test Date: Feb-2025

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	545	654	546	654	545	654	224	472	755	471	757	472	756		
502.gcc_r	224	375	846	383	828	384	825	224	351	903	352	901	353	899		
505.mcf_r	224	233	1550	232	1560	233	1550	224	233	1550	232	1560	233	1550		
520.omnetpp_r	224	406	724	406	723	406	724	224	406	724	406	723	406	724		
523.xalancbmk_r	224	191	1240	191	1240	191	1240	224	191	1240	191	1240	191	1240		
525.x264_r	224	224	1750	224	1750	224	1750	224	209	1880	209	1870	209	1880		
531.deepsjeng_r	224	412	623	412	623	412	623	224	412	623	412	623	412	623		
541.leela_r	224	635	584	635	584	634	585	224	635	584	635	584	634	585		
548.exchange2_r	224	326	1800	332	1770	326	1800	224	326	1800	332	1770	326	1800		
557.xz_r	224	520	465	521	465	521	464	224	520	465	521	465	521	464		

SPECCrate®2017_int_base = 913

SPECCrate®2017_int_peak = 940

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8450H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECCrate®2017_int_base = 913

SPECCrate®2017_int_peak = 940

Test Date: Feb-2025

Hardware Availability: May-2023

Software Availability: Dec-2023

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC4 (4-clusters)

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Thu Feb 6 10:57:20 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 250 (250-6.el9_0)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
10:57:20 up 7 min, 1 user, load average: 0.37, 0.81, 0.67
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 10:56 24.00s 1.24s 0.01s -bash

3. Username
From environment variable \$USER: root

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECCrate®2017_int_base = 913

SPECCrate®2017_int_peak = 940

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2025
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
-----  
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 8252144  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 8252144  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited  
  
-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31  
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups  
sshd: root [priv]  
sshd: root@pts/0  
-bash  
/bin/sh ./run_rate.sh  
runcpu --define default-platform-flags --copies 224 -c ic2024.0.2-lin-sierraforest-rate-20231213.cfg  
--define smt-on --define cores=112 --define physicalfirst --define invoke_with_interleave --define  
drop_caches --tune base,peak -o all intrate  
runcpu --define default-platform-flags --copies 224 --configfile  
ic2024.0.2-lin-sierraforest-rate-20231213.cfg --define smt-on --define cores=112 --define physicalfirst  
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower  
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.070/templogs/preenv.intrate.070.0.log --lognum 070.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017  
  
-----  
6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8450H  
vendor_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0x2b000603  
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs  
cpu cores : 28  
siblings : 56  
4 physical ids (chips)  
224 processors (hardware threads)  
physical id 0: core ids 0-27  
physical id 1: core ids 0-27  
physical id 2: core ids 0-27  
physical id 3: core ids 0-27  
physical id 0: apicids 0-55  
physical id 1: apicids 128-183  
physical id 2: apicids 256-311  
physical id 3: apicids 384-439
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8450H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 913

SPECrate®2017_int_peak = 940

Test Date: Feb-2025

Hardware Availability: May-2023

Software Availability: Dec-2023

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 224
On-line CPU(s) list: 0-223
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Platinum 8450H
BIOS Model name: Intel(R) Xeon(R) Platinum 8450H
CPU family: 6
Model: 143
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 4
Stepping: 8
CPU max MHz: 3500.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
       clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
       lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
       nonstop_tsc cpuid aperf fmpf perf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
       vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
       x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
       abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
       intel_ppin cdp_12 ssbd mba ibrs ibpb ibrs_enhanced tpr_shadow vnmi
       flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smp bmi2 erms
       invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
       clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
       xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect
       avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window
       hwp_epp hwp_pkg_req avx512vbmi umip pkru ospkewaitpkg avx512_vbmi2 gfni
       vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
       bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
       tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 5.3 MiB (112 instances)
L1i cache: 3.5 MiB (112 instances)
L2 cache: 224 MiB (112 instances)
L3 cache: 300 MiB (4 instances)
NUMA node(s): 16
NUMA node0 CPU(s): 0-6,112-118
NUMA node1 CPU(s): 7-13,119-125
NUMA node2 CPU(s): 14-20,126-132
NUMA node3 CPU(s): 21-27,133-139
NUMA node4 CPU(s): 28-34,140-146
NUMA node5 CPU(s): 35-41,147-153
NUMA node6 CPU(s): 42-48,154-160
NUMA node7 CPU(s): 49-55,161-167
NUMA node8 CPU(s): 56-62,168-174
NUMA node9 CPU(s): 63-69,175-181
NUMA node10 CPU(s): 70-76,182-188
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 913

SPECrate®2017_int_peak = 940

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2025
Hardware Availability: May-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
NUMA node11 CPU(s): 77-83,189-195
NUMA node12 CPU(s): 84-90,196-202
NUMA node13 CPU(s): 91-97,203-209
NUMA node14 CPU(s): 98-104,210-216
NUMA node15 CPU(s): 105-111,217-223
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

```
From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K    5.3M   12 Data          1       64           1            64
  L1i     32K    3.5M    8 Instruction  1       64           1            64
  L2      2M     224M   16 Unified       2      2048          1            64
  L3     75M    300M   15 Unified       3     81920          1            64
```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0-6,112-118
node 0 size: 63741 MB
node 0 free: 63375 MB
node 1 cpus: 7-13,119-125
node 1 size: 64508 MB
node 1 free: 64176 MB
node 2 cpus: 14-20,126-132
node 2 size: 64508 MB
node 2 free: 64201 MB
node 3 cpus: 21-27,133-139
node 3 size: 64508 MB
node 3 free: 64028 MB
node 4 cpus: 28-34,140-146
node 4 size: 64508 MB
node 4 free: 64098 MB
node 5 cpus: 35-41,147-153
node 5 size: 64508 MB
node 5 free: 64189 MB
node 6 cpus: 42-48,154-160
node 6 size: 64508 MB
node 6 free: 64203 MB
node 7 cpus: 49-55,161-167
node 7 size: 64508 MB
node 7 free: 63883 MB
node 8 cpus: 56-62,168-174
node 8 size: 64508 MB
node 8 free: 64168 MB
node 9 cpus: 63-69,175-181
node 9 size: 64508 MB
node 9 free: 64267 MB
node 10 cpus: 70-76,182-188
node 10 size: 64472 MB
node 10 free: 64229 MB
node 11 cpus: 77-83,189-195
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 913

SPECrate®2017_int_peak = 940

CPU2017 License: 6488

Test Date: Feb-2025

Test Sponsor: xFusion

Hardware Availability: May-2023

Tested by: xFusion

Software Availability: Dec-2023

Platform Notes (Continued)

```
node 11 size: 64508 MB
node 11 free: 63738 MB
node 12 cpus: 84-90,196-202
node 12 size: 64508 MB
node 12 free: 64272 MB
node 13 cpus: 91-97,203-209
node 13 size: 64508 MB
node 13 free: 64365 MB
node 14 cpus: 98-104,210-216
node 14 size: 64508 MB
node 14 free: 64276 MB
node 15 cpus: 105-111,217-223
node 15 size: 64489 MB
node 15 free: 64272 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  12  12  12  21  21  21  21  21  21  21  21  21  21  21  21
  1: 12  10  12  12  21  21  21  21  21  21  21  21  21  21  21  21
  2: 12  12  10  12  21  21  21  21  21  21  21  21  21  21  21  21
  3: 12  12  12  10  21  21  21  21  21  21  21  21  21  21  21  21
  4: 21  21  21  21  10  12  12  21  21  21  21  21  21  21  21  21
  5: 21  21  21  21  12  10  12  21  21  21  21  21  21  21  21  21
  6: 21  21  21  21  12  10  12  21  21  21  21  21  21  21  21  21
  7: 21  21  21  21  12  12  10  21  21  21  21  21  21  21  21  21
  8: 21  21  21  21  21  21  10  21  12  12  12  21  21  21  21  21
  9: 21  21  21  21  21  21  21  12  10  12  12  21  21  21  21  21
 10: 21  21  21  21  21  21  21  12  12  10  12  21  21  21  21  21
 11: 21  21  21  21  21  21  21  12  12  10  21  21  21  21  21  21
 12: 21  21  21  21  21  21  21  21  21  21  10  12  12  12  12  12
 13: 21  21  21  21  21  21  21  21  21  21  21  12  10  12  12  12
 14: 21  21  21  21  21  21  21  21  21  21  21  21  12  12  10  12
 15: 21  21  21  21  21  21  21  21  21  21  21  21  12  12  12  10
```

9. /proc/meminfo

```
MemTotal: 1056070060 kB
```

10. who -r

```
run-level 5 Feb 6 10:50
```

11. Systemd service manager version: systemd 250 (250-6.el9_0)

```
Default Target Status
graphical      running
```

12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
               accounts-daemon atd auditd avahi-daemon bluetooth crond cups dbus-broker firewalld gdm
               getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt
               low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
               nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
               rsyslog rtkit-daemon selinux-autorelabel-mark smartd sshd sssd switcheroo-control
               systemd-network-generator tuned udisks2 upower vgaauthd vmtoolsd
enabled-runtime systemdr-remount-fs
disabled       arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
               canberra-system-shutdown-reboot chrony-wait chronyd cni-dhcp console-getty cpupower
               cups-browsed dbus-daemon debug-shell dnsmasq hwloc-dump-hwdata iprdump iprinit iprupdate
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8450H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 913

SPECrate®2017_int_peak = 940

Test Date: Feb-2025

Hardware Availability: May-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
iscsid iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update nftables
nvmf-autoconnect podman podman-auto-update podman-restart psacct ras-mc-ctl rasdaemon
rdisc rhcd rhsm rhsm-facts rpmdb-rebuild serial-getty@ speech-dispatcherd sshd-keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext wpa_supplicant
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64  
root=/dev/mapper/rhel-root  
ro  
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet  
nohz_full=1-223
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 800 MHz and 3.50 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes
```

```
-----  
15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: throughput-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 20  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                   60  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10  
vm.zone_reclaim_mode            0
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag      always defer defer+madvise [madvise] never  
enabled     [always] madvise never
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8450H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 913

SPECrate®2017_int_peak = 940

Test Date: Feb-2025

Hardware Availability: May-2023

Software Availability: Dec-2023

Platform Notes (Continued)

```
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag 1
    max_ptes_none 511
    max_ptes_shared 256
    max_ptes_swap 64
    pages_to_scan 4096
    scan_sleep_millisecs 10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release Red Hat Enterprise Linux 9.0 (Plow)
    redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
    system-release Red Hat Enterprise Linux release 9.0 (Plow)

-----
20. Disk information
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   201G   35G  166G  18% /home

-----
21. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: 2488H V7
Product Family: EagleStream
Serial: 202412131126

-----
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 01.02.03.03
BIOS Date: 11/11/2024
```

Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8450H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 913

SPECrate®2017_int_peak = 940

Test Date: Feb-2025

Hardware Availability: May-2023

Software Availability: Dec-2023

Compiler Version Notes (Continued)

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

```
=====
C      | 502.gcc_r(peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

```
=====
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

```
=====
Fortran | 548.exchange2_r(base, peak)
```

```
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8450H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 913

SPECrate®2017_int_peak = 940

Test Date: Feb-2025

Hardware Availability: May-2023

Software Availability: Dec-2023

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.0/lib -lgkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.0/lib -lgkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.0/lib -lgkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8450H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 913

SPECrate®2017_int_peak = 940

Test Date: Feb-2025

Hardware Availability: May-2023

Software Availability: Dec-2023

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.0/lib -lgkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.0/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto
-Ofast -ffast-math -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.0/lib -lgkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2488H V7 (Intel Xeon Platinum 8450H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 913

SPECrate®2017_int_peak = 940

Test Date: Feb-2025

Hardware Availability: May-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revD.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-05 21:57:20-0500.

Report generated on 2025-02-25 19:04:45 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.