



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECSpeed®2017\_int\_base = 18.4

SPECSpeed®2017\_int\_peak = 18.7

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

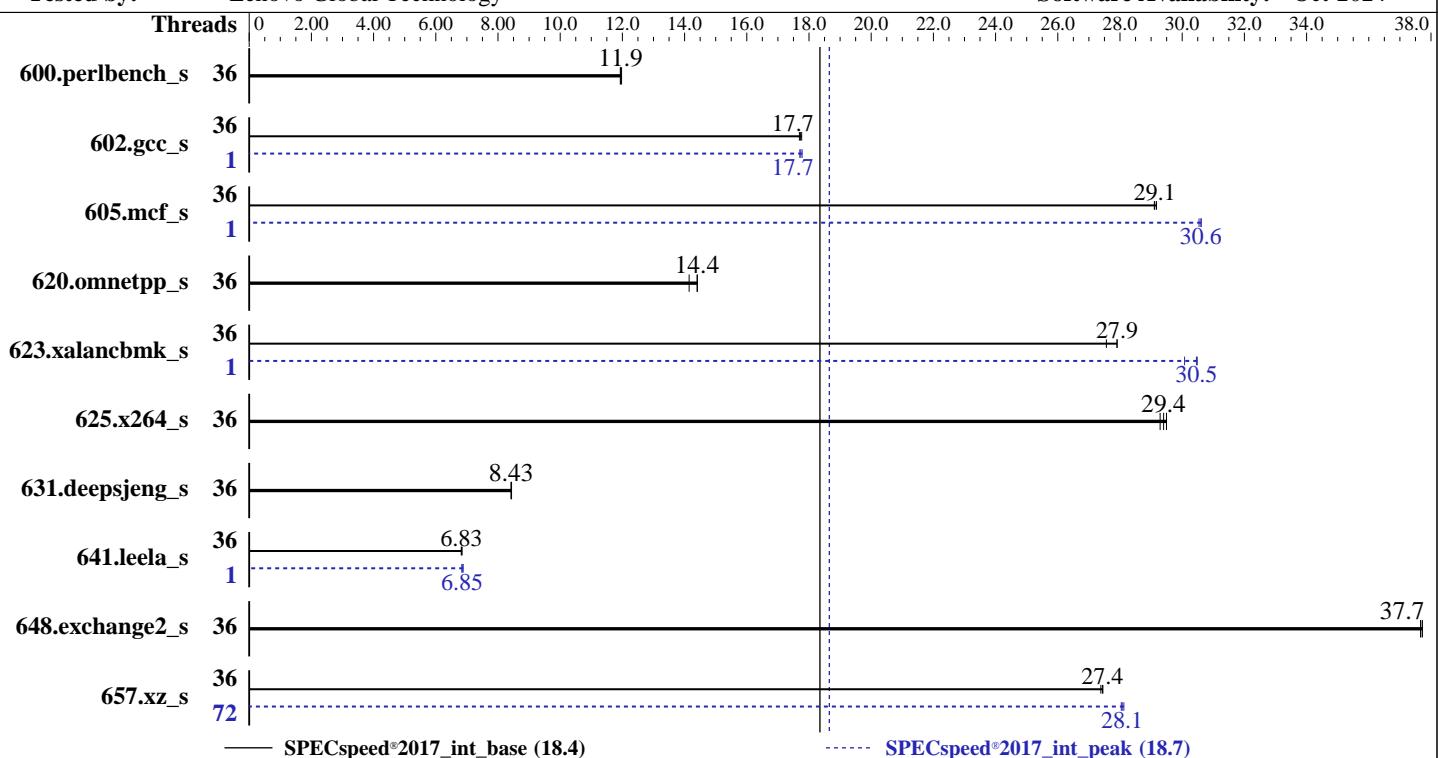

### Hardware

CPU Name: AMD EPYC 9365  
Max MHz: 4300  
Nominal: 3400  
Enabled: 36 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 192 MB I+D on chip per chip,  
32 MB shared / 6 cores  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx8 PC5-6400B-R, running at 6000)  
Storage: 1 x 480 GB SATA SSD  
Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
Compiler: Kernel 5.14.0-427.13.1.el9\_4.x86\_64  
Parallel: C/C++/Fortran: Version 5.0.0 of AOCC  
Firmware: Yes  
File System: Lenovo BIOS Version KAE13II 5.30 released Dec-2024  
System State: xfs  
Base Pointers: Run level 3 (multi-user)  
Peak Pointers: 64-bit  
Other: 64-bit  
Power Management: Peak Pointers: None  
BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

**SPECspeed®2017\_int\_base = 18.4**

**SPECspeed®2017\_int\_peak = 18.7**

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	36	<b><u>149</u></b>	<b><u>11.9</u></b>	148	12.0	149	11.9	36	<b><u>149</u></b>	<b><u>11.9</u></b>	148	12.0	<b><u>149</u></b>	11.9
602.gcc_s	36	<b><u>225</u></b>	<b><u>17.7</u></b>	225	17.7	224	17.8	1	<b><u>224</u></b>	<b><u>17.8</u></b>	<b><u>225</u></b>	<b><u>17.7</u></b>	225	17.7
605.mcf_s	36	162	29.2	<b><u>162</u></b>	<b><u>29.1</u></b>	162	29.1	1	<b><u>155</u></b>	30.5	<b><u>154</u></b>	<b><u>30.6</u></b>	154	30.6
620.omnetpp_s	36	<b><u>113</u></b>	<b><u>14.4</u></b>	113	14.4	115	14.1	36	<b><u>113</u></b>	<b><u>14.4</u></b>	113	14.4	115	14.1
623.xalancbmk_s	36	<b><u>50.8</u></b>	<b><u>27.9</u></b>	50.8	27.9	51.4	27.6	1	47.1	30.1	<b><u>46.5</u></b>	<b><u>30.5</u></b>	46.5	30.5
625.x264_s	36	60.2	29.3	59.8	29.5	<b><u>60.0</u></b>	<b><u>29.4</u></b>	36	60.2	29.3	59.8	29.5	<b><u>60.0</u></b>	<b><u>29.4</u></b>
631.deepsjeng_s	36	170	8.42	170	8.44	<b><u>170</u></b>	<b><u>8.43</u></b>	36	170	8.42	170	8.44	<b><u>170</u></b>	<b><u>8.43</u></b>
641.leela_s	36	249	6.85	250	6.82	<b><u>250</u></b>	<b><u>6.83</u></b>	1	249	6.84	<b><u>249</u></b>	<b><u>6.85</u></b>	248	6.88
648.exchange2_s	36	<b><u>78.0</u></b>	<b><u>37.7</u></b>	77.9	37.7	78.1	37.7	36	<b><u>78.0</u></b>	<b><u>37.7</u></b>	77.9	37.7	78.1	37.7
657.xz_s	36	226	27.4	225	27.5	<b><u>225</u></b>	<b><u>27.4</u></b>	72	<b><u>220</u></b>	<b><u>28.1</u></b>	220	28.1	220	28.0

**SPECspeed®2017\_int\_base = 18.4**

**SPECspeed®2017\_int\_peak = 18.7**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_peak = 18.7

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-71"
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "72"
```

Environment variables set by runcpu during the 602.gcc\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-71"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA Nodes per Socket set to NPS2

```
Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Feb  5 21:45:58 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_peak = 18.7

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

```
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

---

```
1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux
```

---

```
2. w
21:45:58 up 2:42, 0 users, load average: 3.04, 5.01, 3.45
USER   TTY      LOGIN@    IDLE   JCPU   PCPU WHAT
```

---

```
3. Username
From environment variable $USER: root
```

---

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals           (-i) 1546007
max locked memory         (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files                (-n) 1024
pipe size                 (512 bytes, -p) 8
POSIX message queues      (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes         (-u) 1546007
virtual memory             (kbytes, -v) unlimited
file locks                 (-x) unlimited
```

---

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_peak = 18.7

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

```
sshd: root [priv]
sshd: root@notty
/bin/bash ./02.remote_local_SPECcpu_1.01.sh
/bin/bash ./Run035-compliant-amd-speedint.sh
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.218/templogs/preenv.intspeed.218.0.log --lognum 218.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9365 36-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 26
model          : 2
stepping        : 1
microcode       : 0xb00211a
bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores      : 36
siblings        : 72
1 physical ids (chips)
72 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

```
From lscpu from util-linux 2.37.4:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 72
On-line CPU(s) list:    0-71
Vendor ID:              AuthenticAMD
BIOS Vendor ID:         Advanced Micro Devices, Inc.
Model name:              AMD EPYC 9365 36-Core Processor
BIOS Model name:         AMD EPYC 9365 36-Core Processor
CPU family:              26
Model:                  2
Thread(s) per core:     2
Core(s) per socket:      36
Socket(s):               1
Stepping:                1
BogoMIPS:                6789.28
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                        lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
                        aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
                        x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
                        extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit
                        wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

**SPECspeed®2017\_int\_base = 18.4**

**SPECspeed®2017\_int\_peak = 18.7**

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

```
cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms
invpcid cqm_rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin
cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic
v_spec_ctrl vnni avx512vbmi umip pku ospke avx512_vbmi2 gfn1 vaes
vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid
bus_lock_detect movdiri movdir64b overflow_recov succor smca fsrm
avx512_vp2intersect flush_lld debug_swap
```

Virtualization:

AMD-V

L1d cache:

1.7 MiB (36 instances)

L1i cache:

1.1 MiB (36 instances)

L2 cache:

36 MiB (36 instances)

L3 cache:

192 MiB (6 instances)

NUMA node(s):

2

NUMA node0 CPU(s):

0-17,36-53

NUMA node1 CPU(s):

18-35,54-71

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability Llrf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation: Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation: Enhanced / Automatic IBRS, IBPB conditional, STIBP

always-on, RSB filling, PBRSB-eIBRS Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.7M	12	Data	1	64	1	64
L1i	32K	1.1M	8	Instruction	1	64	1	64
L2	1M	36M	16	Unified	2	1024	1	64
L3	32M	192M	16	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-17,36-53

node 0 size: 193109 MB

node 0 free: 192217 MB

node 1 cpus: 18-35,54-71

node 1 size: 193431 MB

node 1 free: 192460 MB

node distances:

node 0 1

0: 10 12

1: 12 10

-----  
9. /proc/meminfo

MemTotal: 395818052 kB

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_peak = 18.7

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

10. who -r  
run-level 3 Feb 5 19:04

11. Systemd service manager version: systemd 252 (252-32.el9\_4)  
Default Target Status  
multi-user degraded

12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
\* NetworkManager-wait-online.service loaded failed failed Network Manager Wait Online

13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond  
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor  
mdmonitor microcode nis-domainname rhsmcertd rsyslog rtkit-daemon selinux-autorelabel-mark  
sshd sssd systemd-boot-update systemd-network-generator udisks2 upower  
enabled-runtime systemd-remount-fs  
disabled canberra-system-bootup canberra-system-shutdown canberra-system-shutdown-reboot  
chrony-wait chronyd-restricted console-getty cpupower debug-shell dnf-system-upgrade  
hwloc-dump-hwdata kvm\_stat man-db-restart-cache-update nftables pesign rdisc rhcd rhsm  
rhsm-facts rpmbuild rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@  
systemd-boot-check-no-failures systemd-pstore systemd-sysext  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate  
systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=(hd3,gpt3)/boot/vmlinuz-5.14.0-427.13.1.el9\_4.x86\_64  
root=UUID=273c79f3-13a9-4ae6-9c36-e82799318ef8  
ro  
resume=UUID=19c8733f-555f-4142-8f61-7554d0dc64ae

15. cpupower frequency-info  
analyzing CPU 43:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes  
Boost States: 0  
Total States: 3  
Pstate-P0: 16800MHz

16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 0  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 8  
vm.dirty\_writeback\_centisecs 500

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_peak = 18.7

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

```
vm.dirtytime_expire_seconds      43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages      0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag           [always] defer defer+madvise madvise never
    enabled          [always] madvise never
    hpage_pmd_size   2097152
    shmem_enabled    always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs   60000
    defrag                  1
    max_ptes_none           511
    max_ptes_shared          256
    max_ptes_swap             64
    pages_to_scan            4096
    scan_sleep_millisecs     10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release      Red Hat Enterprise Linux 9.4 (Plow)
    redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)
    system-release  Red Hat Enterprise Linux release 9.4 (Plow)

-----
20. Disk information
    SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/sda4        xfs   372G  106G  266G  29% /home

-----
21. /sys/devices/virtual/dmi/id
    Vendor:          Lenovo
    Product:         ThinkSystem SR635V3
    Product Family:  ThinkSystem
    Serial:          1234567890

-----
22. dmidecode
    Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        12x SK Hynix HMCG88AHBRA290N 32 GB 2 rank 6400, configured at 6000

-----
23. BIOS
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_peak = 18.7

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Platform Notes (Continued)

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo  
BIOS Version: KAE131I-5.30  
BIOS Date: 12/17/2024  
BIOS Revision: 5.30  
Firmware Revision: 54.6

## Compiler Version Notes

=====

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak)  
| 657.xz\_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aoxx-compiler-rel-5.0.0-4925-1316/bin

=====

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aoxx-compiler-rel-5.0.0-4925-1316/bin

=====

Fortran | 648.exchange2\_s(base, peak)

=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aoxx-compiler-rel-5.0.0-4925-1316/bin

=====

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_peak = 18.7

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_peak = 18.7

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-DSPEC\_OPENMP -fremap-arrays -fstrip-mining  
-fstruct-layout=9 -mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3  
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdaloc -lflang

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_peak = 18.7

CPU2017 License: 9017

Test Date: Feb-2025

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2025

Tested by: Lenovo Global Technology

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

625.x264\_s: basepeak = yes

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng\_s: basepeak = yes

```
641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

648.exchange2\_s: basepeak = yes



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR635 V3  
(3.40 GHz, AMD EPYC 9365)

SPECspeed®2017\_int\_base = 18.4

SPECspeed®2017\_int\_peak = 18.7

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2025

Hardware Availability: Feb-2025

Software Availability: Oct-2024

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Turin-E.html>  
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-Turin-E.xml>  
<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-05 08:45:57-0500.

Report generated on 2025-02-25 19:06:22 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.