



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

**SPECrate®2017\_int\_base = 1720**

**SPECrate®2017\_int\_peak = 1760**

CPU2017 License: 9019


**Test Date:** Dec-2024

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Oct-2024

**Tested by:** Cisco Systems

**Software Availability:** Sep-2024

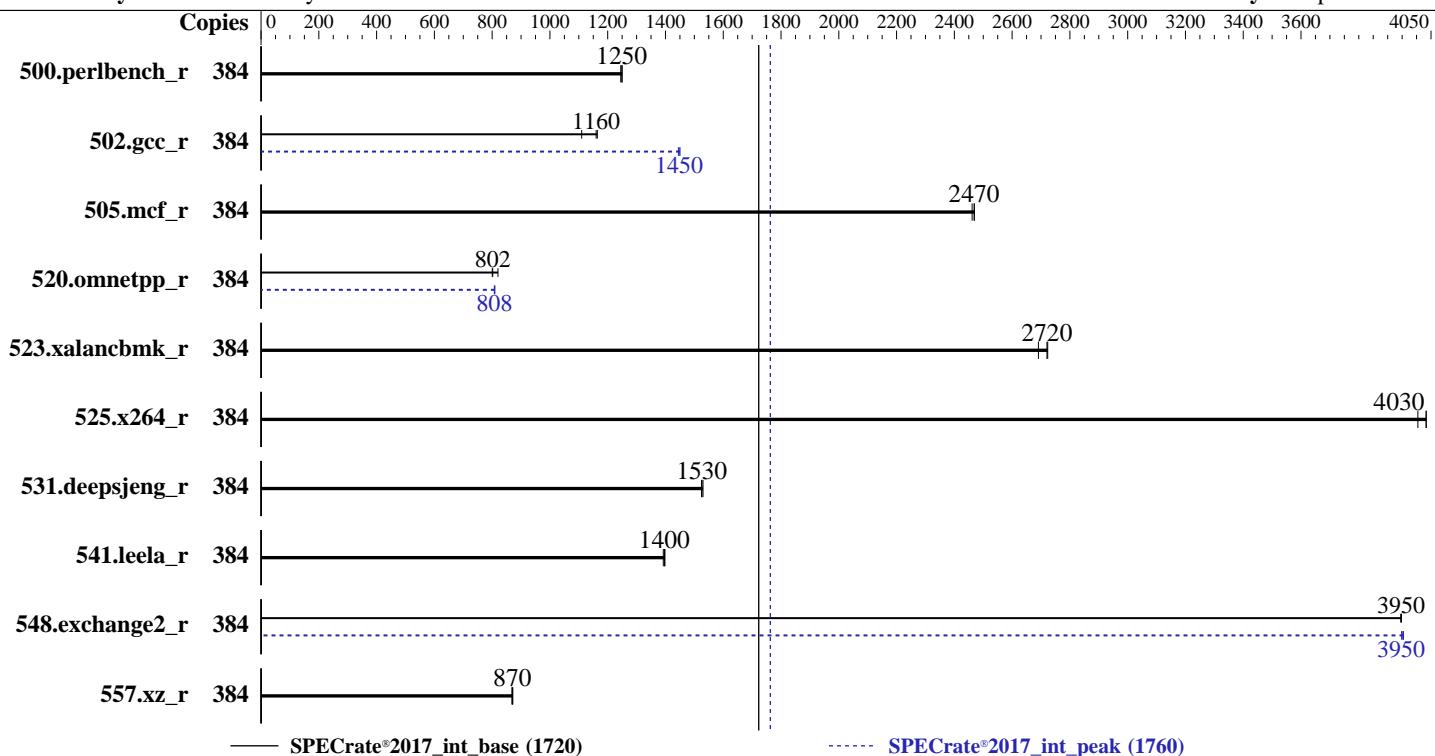

Hardware		Software	
CPU Name:	AMD EPYC 9654	OS:	SUSE Linux Enterprise Server 15 SP6
Max MHz:	3700		kernel version
Nominal:	2400	Compiler:	6.4.0-150600.21-default
Enabled:	196 cores, 2 chips, 2 threads/core	Parallel:	C/C++/Fortran: Version 5.0.0 of AOCC
Orderable:	1,2 chips	Firmware:	No
Cache L1:	32 KB I + 32 KB D on chip per core	File System:	Version 4.3.5a released Sep-2024
L2:	1 MB I+D on chip per core	System State:	btrfs
L3:	384 MB I+D on chip per chip, 32 MB shared / 8 cores	Base Pointers:	Run level 3 (multi-user)
Other:	None	Peak Pointers:	64-bit
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)	Other:	32/64-bit
Storage:	1 x 960 GB NVMe SSD	Power Management:	None
Other:	CPU Cooling: Air	BIOS and OS set to prefer performance at the cost of additional power usage.	



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

**SPECrate®2017\_int\_base = 1720**

**SPECrate®2017\_int\_peak = 1760**

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	384	489	1250	491	1250	<b>490</b>	<b>1250</b>	384	489	1250	491	1250	<b>490</b>	<b>1250</b>		
502.gcc_r	384	490	1110	467	1160	<b>469</b>	<b>1160</b>	384	<b>376</b>	<b>1450</b>	375	1450	376	1440		
505.mcf_r	384	251	2470	<b>251</b>	<b>2470</b>	252	2460	384	251	2470	<b>251</b>	<b>2470</b>	252	2460		
520.omnetpp_r	384	<b>628</b>	<b>802</b>	629	800	614	820	384	622	809	624	808	<b>623</b>	<b>808</b>		
523.xalancbmk_r	384	149	2720	<b>149</b>	<b>2720</b>	151	2690	384	149	2720	<b>149</b>	<b>2720</b>	151	2690		
525.x264_r	384	168	4000	<b>167</b>	<b>4030</b>	167	4030	384	168	4000	<b>167</b>	<b>4030</b>	167	4030		
531.deepsjeng_r	384	288	1530	289	1520	<b>288</b>	<b>1530</b>	384	288	1530	289	1520	<b>288</b>	<b>1530</b>		
541.leela_r	384	455	1400	457	1390	<b>455</b>	<b>1400</b>	384	455	1400	457	1390	<b>455</b>	<b>1400</b>		
548.exchange2_r	384	255	3950	<b>255</b>	<b>3950</b>	255	3950	384	<b>255</b>	<b>3950</b>	254	3950	255	3950		
557.xz_r	384	<b>477</b>	<b>870</b>	476	872	478	868	384	<b>477</b>	<b>870</b>	476	872	478	868		

**SPECrate®2017\_int\_base = 1720**

**SPECrate®2017\_int\_peak = 1760**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS settings:

NUMA nodes per socket set to NPS4  
Determinism Slider set to Power  
DF C-States set to Disabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Dec 5 02:14:01 2024
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent\_hugepage
- 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 18. OS release
- 19. Disk information
- 20. /sys/devices/virtual/dmi/id
- 21. dmidecode
- 22. BIOS

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Platform Notes (Continued)

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:14:01 up 6 min, 2 users, load average: 0.27, 0.10, 0.04
USER    TTY      FROM             LOGIN@    IDLE   JCPU   PCPU WHAT
root    tty1     -               02:12    33.00s  1.71s  0.36s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals           (-i) 6190517
max locked memory        (kbytes, -l) 2097152
max memory size          (kbytes, -m) unlimited
open files                (-n) 1024
pipe size                 (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                  (seconds, -t) unlimited
max user processes         (-u) 6190517
virtual memory             (-v) unlimited
file locks                 (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py -b intrate
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9654 96-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 1
microcode       : 0xa101148
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size        : 3584 4K pages
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Platform Notes (Continued)

```
cpu cores      : 96
siblings       : 192
2 physical ids (chips)
 384 processors (hardware threads)
  physical id 0: core ids 0-95
  physical id 1: core ids 0-95
  physical id 0: apicids 0-191
  physical id 1: apicids 256-447
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	384
On-line CPU(s) list:	0-383
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9654 96-Core Processor
BIOS Model name:	AMD EPYC 9654 96-Core Processor
BIOS CPU family:	Unknown CPU @ 2.4GHz
CPU family:	107
Model:	25
Thread(s) per core:	17
Core(s) per socket:	2
Socket(s):	96
Stepping:	2
Frequency boost:	1
CPU(s) scaling MHz:	enabled
CPU max MHz:	65%
CPU min MHz:	3707.8120
BogoMIPS:	1500.0000
Flags:	4792.69
Virtualization:	fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibr skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp ibrs_enhanced vmmcall fsqsbbase bml1 avx2 smep bml2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassist pausefilter pfthreshold avic v_vmsave_vmlload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pkv ospe avx512_vbmi2 gfnv vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_ll1d debug_swap
L1d cache:	AMD-V
L1i cache:	6 MiB (192 instances)
L2 cache:	6 MiB (192 instances)
	192 MiB (192 instances)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Platform Notes (Continued)

L3 cache:	768 MiB (24 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-23,192-215
NUMA node1 CPU(s):	24-47,216-239
NUMA node2 CPU(s):	48-71,240-263
NUMA node3 CPU(s):	72-95,264-287
NUMA node4 CPU(s):	96-119,288-311
NUMA node5 CPU(s):	120-143,312-335
NUMA node6 CPU(s):	144-167,336-359
NUMA node7 CPU(s):	168-191,360-383
Vulnerability Gather data sampling:	Not affected
Vulnerability Itlb multihit:	Not affected
Vulnerability Llrf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Reg file data sampling:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec rstack overflow:	Mitigation; Safe RET
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	6M	8	Data	1	64	1	64
L1i	32K	6M	8	Instruction	1	64	1	64
L2	1M	192M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0-23,192-215
node 0 size: 193156 MB
node 0 free: 192449 MB
node 1 cpus: 24-47,216-239
node 1 size: 193523 MB
node 1 free: 192827 MB
node 2 cpus: 48-71,240-263
node 2 size: 193523 MB
node 2 free: 192761 MB
node 3 cpus: 72-95,264-287
node 3 size: 193523 MB
node 3 free: 192832 MB
node 4 cpus: 96-119,288-311
node 4 size: 193523 MB
node 4 free: 192869 MB
node 5 cpus: 120-143,312-335
node 5 size: 193523 MB
node 5 free: 192816 MB
node 6 cpus: 144-167,336-359
node 6 size: 193523 MB
node 6 free: 192859 MB
node 7 cpus: 168-191,360-383
node 7 size: 193359 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Platform Notes (Continued)

```
node 7 free: 192684 MB
node distances:
node  0   1   2   3   4   5   6   7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10

-----
9. /proc/meminfo
MemTotal:      1584799676 kB

-----
10. who -r
run-level 3 Dec 5 02:07

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
Default Target      Status
multi-user          running

-----
12. Services, from systemctl list-unit-files
STATE            UNIT FILES
enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance iscsi
                  issue-generator kbdsettings klog lvm2-monitor nsqd nvmefc-boot-connections
                  nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore
                  virtqemud wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info
                  firewalld fsidd gpm grub2-once haveged hv_fcopy_daemon hv_kvp_daemon hv_vss_daemon
                  hwloc-dump-hwdata ipmi ipmievrd iscsid issue-add-ssh-keys kexec-load ksm
                  kvm_stat libvirt-guests lunmask man-db-create multipathd nfs nfs-blkmap nfs-server
                  nfsserver rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts
                  snmpd snmptrapd strongswan strongswan-starter svnservice systemd-boot-check-no-failures
                  systemd-confext systemd-network-generator systemd-nspawn@ systemd-sysext
                  systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtlockd virtlogd
                  virtnetworkd virtnodedeved virtnwfilterd virtsecretd virtstoraged
indirect        pcscd systemd-userdbd tftp wicked

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=5d106d92-ac35-417e-b9aa-58e20fc2854f
splash=silent
mitigations=auto
quiet
security=apparmor

-----
14. cpupower frequency-info
analyzing CPU 351:
    current policy: frequency should be within 1.50 GHz and 2.40 GHz.
    The governor "performance" may decide which speed to use
    within this range.
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Platform Notes (Continued)

```
boost state support:  
Supported: yes  
Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space      0  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio     10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs    3000  
vm.dirty_ratio                 8  
vm.dirty_writeback_centisecs  500  
vm.dirtytime_expire_seconds   43200  
vm.extfrag_threshold          500  
vm.min_unmapped_ratio         1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy     0  
vm.nr_overcommit_hugepages   0  
vm.swappiness                  1  
vm.watermark_boost_factor    15000  
vm.watermark_scale_factor     10  
vm.zone_reclaim_mode          1
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
defrag           [always] defer defer+madvise madvise never  
enabled          [always] madvise never  
hpage_pmd_size  2097152  
shmem_enabled    always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs        60000  
defrag                      1  
max_ptes_none                511  
max_ptes_shared              256  
max_ptes_swap                64  
pages_to_scan                4096  
scan_sleep_millisecs        10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----  
19. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/nvme1n1p2  btrfs  371G  11G  357G  3%  /home
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor:          Cisco Systems Inc  
Product:         UCSX-215C-M8  
Serial:          FCH282172B4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Platform Notes (Continued)

### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

15x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800  
2x 0xCE00 M321R8GA0PB0-CWMJH 64 GB 2 rank 5600, configured at 4800  
7x 0xCE00 M321R8GA0PB0-CWMKJ 64 GB 2 rank 5600, configured at 4800

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: X215M8.4.3.5a.0.0904241153  
BIOS Date: 09/04/2024  
BIOS Revision: 5.27

## Compiler Version Notes

C | 502.gcc\_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc\_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Compiler Version Notes (Continued)

```
=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
     | 541.leela_r(base, peak)
-----
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----
```

```
=====
Fortran | 548.exchange2_r(base, peak)
-----
```

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
-----
```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdaloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdaloc-ext
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdaloc -ldl
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdaloc
```

505.mcf\_r: basepeak = yes

525.x264\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

CPU2017 License: 9019

Test Date: Dec-2024

Test Sponsor: Cisco Systems

Hardware Availability: Oct-2024

Tested by: Cisco Systems

Software Availability: Sep-2024

## Peak Optimization Flags (Continued)

557.xz\_r: basepeak = yes

C++ benchmarks:

```
520.omnetpp_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fsto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lamdaloc-ext
-ldl
```

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fsto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdaloc -ldl
```

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument
-L/home/work/cpu2017/v119/aocc5/1316/amd\_rate\_aocc500\_znver5\_A\_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS X215c M8 (AMD EPYC 9654  
2.40 GHz Processor)

SPECrate®2017\_int\_base = 1720

SPECrate®2017\_int\_peak = 1760

**CPU2017 License:** 9019

**Test Date:** Dec-2024

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Oct-2024

**Tested by:** Cisco Systems

**Software Availability:** Sep-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v3-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-12-05 02:14:00-0500.

Report generated on 2025-02-25 19:08:00 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.