



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECSpeed®2017_int_base = 14.8

SPECSpeed®2017_int_peak = 15.0

CPU2017 License: 001176


Test Date: Feb-2025

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Jan-2025

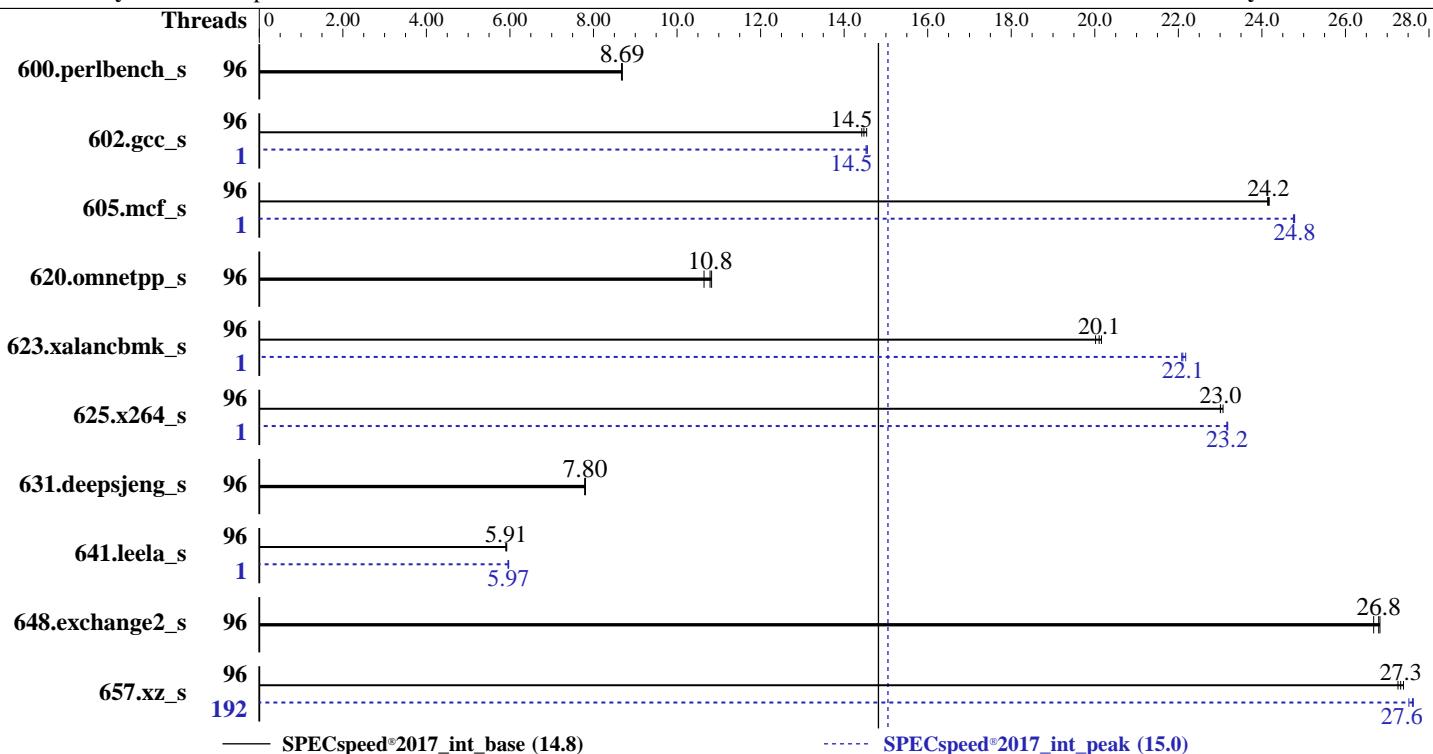

Hardware		Software	
CPU Name:	AMD EPYC 9454	OS:	Ubuntu 24.04.1 LTS
Max MHz:	3800	Compiler:	Kernel 6.8.0-52-generic
Nominal:	2750	Parallel:	C/C++/Fortran: Version 5.0.0 of AOCC
Enabled:	96 cores, 2 chips, 2 threads/core	Firmware:	Yes
Orderable:	2 chips	File System:	Version 3.0a released Dec-2024
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	ext4
L2:	1 MB I+D on chip per core	Base Pointers:	Run level 3 (multi-user)
L3:	256 MB I+D on chip per chip, 32 MB shared / 6 cores	Peak Pointers:	64-bit
Other:	None	Other:	64-bit
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)	Power Management:	None
Storage:	1 x 800 GB NVMe SSD	BIOS and OS set to max performance at the cost of additional power usage.	
Other:	CPU Cooling: Air		



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 001176

Test Date: Feb-2025

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Jan-2025

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	204	8.69	204	8.69	205	8.67	96	204	8.69	204	8.69	205	8.67		
602.gcc_s	96	276	14.4	274	14.5	275	14.5	1	274	14.5	274	14.5	274	14.6		
605.mcf_s	96	196	24.1	195	24.2	195	24.2	1	191	24.8	190	24.8	191	24.8		
620.omnetpp_s	96	151	10.8	153	10.6	151	10.8	96	151	10.8	153	10.6	151	10.8		
623.xalancbmk_s	96	70.8	20.0	70.5	20.1	70.3	20.2	1	63.9	22.2	64.1	22.1	64.2	22.1		
625.x264_s	96	76.7	23.0	76.5	23.1	76.7	23.0	1	76.2	23.2	76.1	23.2	76.1	23.2		
631.deepsjeng_s	96	184	7.81	184	7.80	184	7.79	96	184	7.81	184	7.80	184	7.79		
641.leela_s	96	289	5.91	288	5.92	289	5.91	1	286	5.97	287	5.95	286	5.97		
648.exchange2_s	96	110	26.7	110	26.8	110	26.8	96	110	26.7	110	26.8	110	26.8		
657.xz_s	96	226	27.4	226	27.3	227	27.3	192	224	27.6	224	27.6	225	27.5		
SPECspeed®2017_int_base = 14.8																
SPECspeed®2017_int_peak = 15.0																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

Test Date: Feb-2025

Hardware Availability: Nov-2022

Software Availability: Jan-2025

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-191"
LD_LIBRARY_PATH =
    "/home/cpu2017/amd_speed_aocc500_znver5_A/lib:/home/cpu2017/amd_speed_aocc500_znver5_A/lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "192"
```

Environment variables set by runcpu during the 602.gcc_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-191"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

```
NUMA Nodes Per Socket = NPS4
Determinism Control = Manual
Determinism Enable = Power
TDP Control = Manual
TDP = 300
Package Power Limit Control = Manual
Package Power Limit = 300
TSME = Disabled
```

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on as-2025hs-tnr-9454 Sat Feb 8 21:21:44 2025
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 001176

Test Date: Feb-2025

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Jan-2025

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.5)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
-

1. uname -a
Linux as-2025hs-tnr-9454 6.8.0-52-generic #53-Ubuntu SMP PREEMPT_DYNAMIC Sat Jan 11 00:06:25 UTC 2025
x86_64 x86_64 x86_64 GNU/Linux

2. w
21:21:44 up 13:58, 1 user, load average: 13.65, 112.06, 160.52
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
lab tty1 - 07:24 13:56m 1.61s 1.55s sudo su -

3. Username
From environment variable \$USER: root
From the command 'logname': lab

4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 2097152
process 6191010
nofiles 1024
vmemory(kbytes) unlimited
locks unlimited
rtprio 0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 001176

Test Date: Feb-2025

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Jan-2025

Platform Notes (Continued)

```
-----  
5. sysinfo process ancestry  
/sbin/init  
/bin/login -p --  
-bash  
sudo su -  
sudo su -  
su -  
-bash  
python3 ./run_amd_speed_aocc500_znver5_A1.py  
/bin/bash ./amd_speed_aocc500_znver5_A1.sh  
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed  
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower  
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile  
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2  
specperl $SPEC/bin/sysinfo  
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo  
model name      : AMD EPYC 9454 48-Core Processor  
vendor_id       : AuthenticAMD  
cpu family     : 25  
model          : 17  
stepping        : 1  
microcode       : 0xa101148  
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso  
TLB size        : 3584 4K pages  
cpu cores       : 48  
siblings        : 96  
2 physical ids (chips)  
192 processors (hardware threads)  
physical id 0: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61  
physical id 1: core ids 0-5,8-13,16-21,24-29,32-37,40-45,48-53,56-61  
physical id 0: apicids 0-11,16-27,32-43,48-59,64-75,80-91,96-107,112-123  
physical id 1: apicids 128-139,144-155,160-171,176-187,192-203,208-219,224-235,240-251  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for  
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

From lscpu from util-linux 2.39.3:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	192
On-line CPU(s) list:	0-191
Vendor ID:	AuthenticAMD
BIOS Vendor ID:	Advanced Micro Devices, Inc.
Model name:	AMD EPYC 9454 48-Core Processor
BIOS Model name:	AMD EPYC 9454 48-Core Processor
BIOS CPU family:	107
CPU family:	25
Model:	17
Thread(s) per core:	2
Core(s) per socket:	48
Socket(s):	2
Stepping:	1

Unknown CPU @ 2.7GHz

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

Test Date: Feb-2025

Hardware Availability: Nov-2022

Software Availability: Jan-2025

Platform Notes (Continued)

Frequency boost:

enabled

CPU(s) scaling MHz:

73%

CPU max MHz:

3810.7910

CPU min MHz:

1500.0000

BogoMIPS:

5491.90

Flags:

```
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmix fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmpfperf rapl pn1 pc1mulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
user_shstx avx512_bf16 clzero irperf xsaverptr rdpru wbnoinvd
amd_ppin cpc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pkru
ospke avx512_vbmi2 gfn1 vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpocntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
debug_swap
```

L1d cache:

3 MiB (96 instances)

L1i cache:

3 MiB (96 instances)

L2 cache:

96 MiB (96 instances)

L3 cache:

512 MiB (16 instances)

NUMA node(s):

8

NUMA node0 CPU(s):

0-11,96-107

NUMA node1 CPU(s):

12-23,108-119

NUMA node2 CPU(s):

24-35,120-131

NUMA node3 CPU(s):

36-47,132-143

NUMA node4 CPU(s):

48-59,144-155

NUMA node5 CPU(s):

60-71,156-167

NUMA node6 CPU(s):

72-83,168-179

NUMA node7 CPU(s):

84-95,180-191

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability L1tf:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Mitigation; Safe RET

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP

always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 001176

Test Date: Feb-2025

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Jan-2025

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0-11,96-107
node 0 size: 193181 MB
node 0 free: 191799 MB
node 1 cpus: 12-23,108-119
node 1 size: 193527 MB
node 1 free: 192447 MB
node 2 cpus: 24-35,120-131
node 2 size: 193527 MB
node 2 free: 192301 MB
node 3 cpus: 36-47,132-143
node 3 size: 193527 MB
node 3 free: 192432 MB
node 4 cpus: 48-59,144-155
node 4 size: 193527 MB
node 4 free: 192325 MB
node 5 cpus: 60-71,156-167
node 5 size: 193527 MB
node 5 free: 192457 MB
node 6 cpus: 72-83,168-179
node 6 size: 193527 MB
node 6 free: 192454 MB
node 7 cpus: 84-95,180-191
node 7 size: 193476 MB
node 7 free: 192360 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  12  12  12  32  32  32  32
  1: 12  10  12  12  32  32  32  32
  2: 12  12  10  12  32  32  32  32
  3: 12  12  12  10  32  32  32  32
  4: 32  32  32  32  10  12  12  12
  5: 32  32  32  32  12  10  12  12
  6: 32  32  32  32  12  12  10  12
  7: 32  32  32  32  12  12  12  10
```

9. /proc/meminfo

```
MemTotal: 1584971380 kB
```

10. who -r

```
run-level 3 Feb 8 15:23
```

11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.5)

```
Default Target Status
multi-user      running
```

12. Services, from systemctl list-unit-files

```
STATE          UNIT FILES
enabled        ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                snapd sysstat systemd-networkd systemd-wait-online systemd-pstore
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 001176

Test Date: Feb-2025

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Jan-2025

Platform Notes (Continued)

```
systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
unattended-upgrades vgaauth
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
systemd-boot-check-no-failures systemd-confcontext systemd-network-generator
systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
systemd-time-wait-sync upower
indirect systemd-sysupdate systemd-sysupdate-reboot uuidd
masked cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common
```

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-6.8.0-52-generic
root=UUID=fac022ef-b566-45fd-8873-d1a5c981c211
ro
```

14. cpupower frequency-info

```
analyzing CPU 126:
    current policy: frequency should be within 1.50 GHz and 2.75 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.

    boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
        Pstate-P0: 2750MHz
```

15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1
```

16. /sys/kernel/mm/transparent_hugepage

```
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 001176

Test Date: Feb-2025

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Jan-2025

Platform Notes (Continued)

17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

18. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 24.04.1 LTS

19. Disk information
SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4 732G 16G 679G 3% /

20. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: H13DSH
Product Family: SMC H13
Serial: TEST123456

21. dmidecode
Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
24x SK Hynix HMCG94MEBRA123N 64 GB 2 rank 4800

22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 3.0a
BIOS Date: 12/06/2024
BIOS Revision: 5.27

Compiler Version Notes

=====| 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

=====AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

Test Date: Feb-2025

Hardware Availability: Nov-2022

Software Availability: Jan-2025

Compiler Version Notes (Continued)

C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 648.exchange2_s(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Feb-2025

Hardware Availability: Nov-2022

Software Availability: Jan-2025

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 001176

Test Date: Feb-2025

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Jan-2025

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -floop
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -floop
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: Same as 602.gcc_s

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 001176

Test Date: Feb-2025

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Jan-2025

Peak Optimization Flags (Continued)

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng_s: basepeak = yes

```
641.leela_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Supermicro

Hyper A+ Server AS -2025HS-TNR
(H13DSH , AMD EPYC 9454)

SPECspeed®2017_int_base = 14.8

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 001176

Test Date: Feb-2025

Test Sponsor: Supermicro

Hardware Availability: Nov-2022

Tested by: Supermicro

Software Availability: Jan-2025

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Genoa-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Genoa-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-08 16:21:44-0500.

Report generated on 2025-02-25 19:09:02 by CPU2017 PDF formatter v6716.

Originally published on 2025-02-25.