# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR675 V3
(2.40 GHz, AMD EPYC 9535)

SPECrate®2017_fp_base = 1570

SPECrate®2017_fp_peak = 1680

**CPU2017 License:** 9017
**Test Sponsor:** Lenovo Global Technology
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2025
**Hardware Availability:** Mar-2025
**Software Availability:** Oct-2024

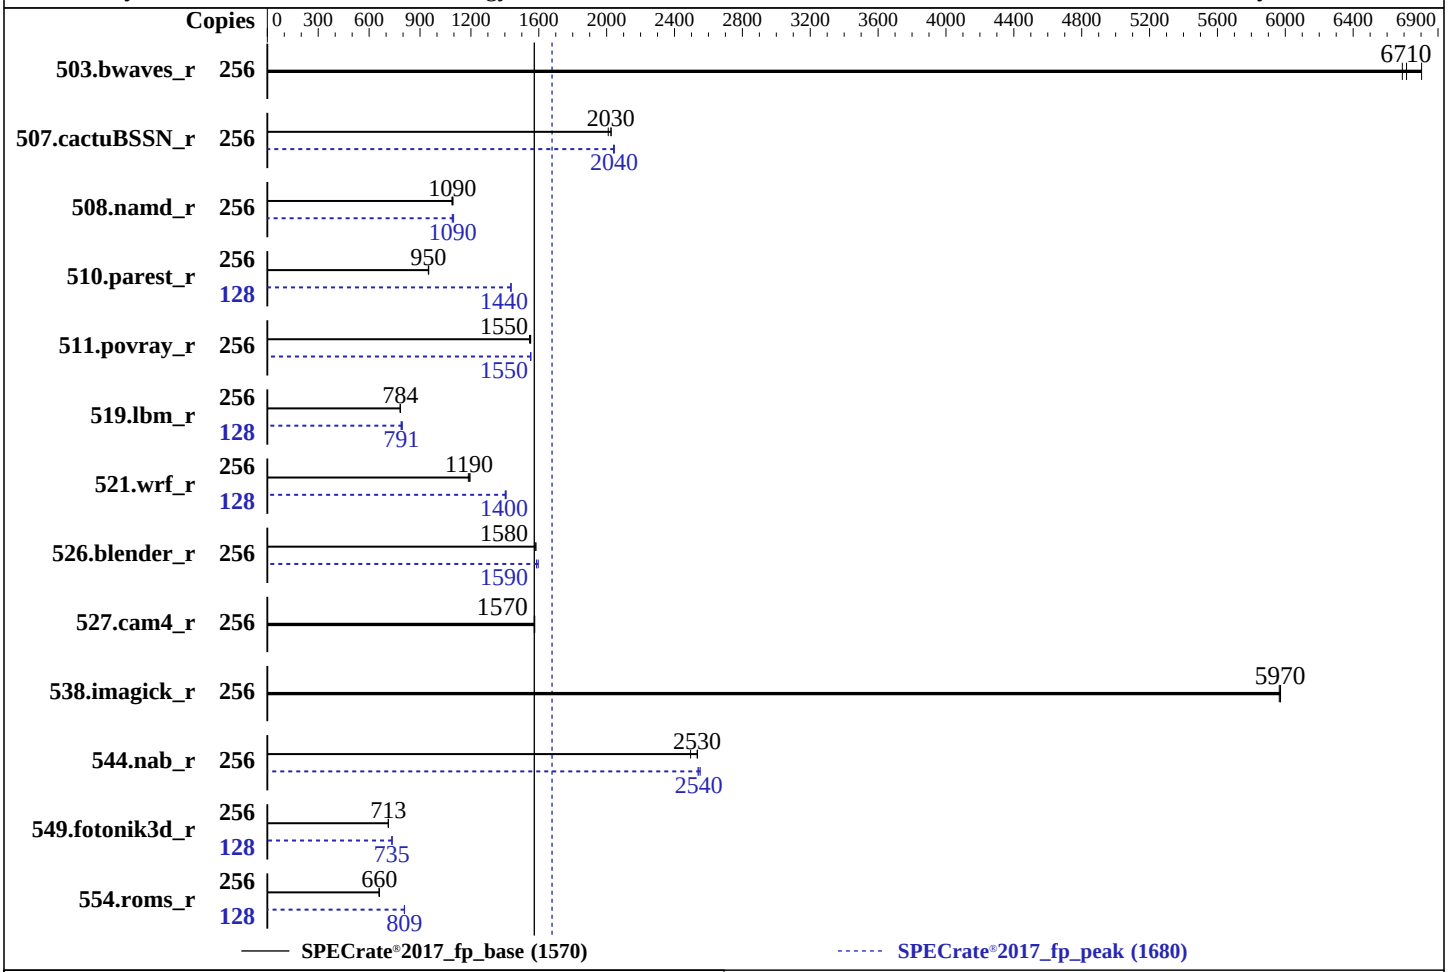


## Hardware

| | |
|---|---|
| CPU Name: | AMD EPYC 9535 |
| Max MHz: | 4300 |
| Nominal: | 2400 |
| Enabled: | 128 cores, 2 chips, 2 threads/core |
| Orderable: | 1,2 chips |
| Cache L1: | 32 KB I + 48 KB D on chip per core |
| L2: | 1 MB I+D on chip per core |
| L3: | 256 MB I+D on chip per chip, 16 MB shared / 4 cores |
| Other: | None |
| Memory: | 768 GB (24 x 32 GB 2Rx8 PC5-6400B-R, running at 6000) |
| Storage: | 1 x 1.92 TB M.2 NVME SSD |
| Other: | CPU Cooling: Air |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP6 Kernel 6.4.0-150600.21-default |
| Compiler: | C/C++/Fortran: Version 5.0.0 of AOCC |
| Parallel: | No |
| Firmware: | Lenovo BIOS Version QGE133I 7.20 released Feb-2025 |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | None |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 503.bwaves_r | 256 | 384 | 6690 | **382** | **6710** | 377 | 6800 | 256 | 384 | 6690 | **382** | **6710** | 377 | 6800 |
| 507.cactuBSSN_r | 256 | **160** | **2030** | 160 | 2030 | 161 | 2010 | 256 | 159 | 2040 | **159** | **2040** | 158 | 2040 |
| 508.namd_r | 256 | 222 | 1090 | 224 | 1090 | **223** | **1090** | 256 | 223 | 1090 | 221 | 1100 | **222** | **1090** |
| 510.parest_r | 256 | 706 | 949 | 704 | 951 | **705** | **950** | 128 | **233** | **1440** | 233 | 1440 | 233 | 1440 |
| 511.povray_r | 256 | **385** | **1550** | 387 | 1550 | 385 | 1550 | 256 | 385 | 1550 | **385** | **1550** | 385 | 1550 |
| 519.lbm_r | 256 | 345 | 783 | **344** | **784** | 344 | 784 | 128 | 170 | 796 | **171** | **791** | 171 | 788 |
| 521.wrf_r | 256 | 480 | 1190 | 484 | 1180 | **482** | **1190** | 128 | **204** | **1400** | 204 | 1410 | 205 | 1400 |
| 526.blender_r | 256 | 246 | 1580 | 248 | 1570 | **246** | **1580** | 256 | 246 | 1590 | **246** | **1590** | 244 | 1600 |
| 527.cam4_r | 256 | 284 | 1580 | 285 | 1570 | **284** | **1570** | 256 | 284 | 1580 | 285 | 1570 | **284** | **1570** |
| 538.imagick_r | 256 | **107** | **5970** | 107 | 5970 | 107 | 5960 | 256 | **107** | **5970** | 107 | 5970 | 107 | 5960 |
| 544.nab_r | 256 | 173 | 2490 | 170 | 2540 | **170** | **2530** | 256 | 170 | 2540 | **169** | **2540** | 169 | 2550 |
| 549.fotonik3d_r | 256 | 1398 | 713 | 1399 | 713 | **1398** | **713** | 128 | 679 | 735 | 679 | 735 | **679** | **735** |
| 554.roms_r | 256 | **616** | **660** | 618 | 658 | 616 | 661 | 128 | 251 | 809 | **252** | **809** | 252 | 807 |

**SPECrate®2017_fp_base = 1570**

**SPECrate®2017_fp_peak = 1680**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

## Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

cpupower set to performance mode
```

**(Continued on next page)**

## Operating System Notes (Continued)

```
cpupower frequency-set -r -g performance
To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017-1.1.9-amd
     -aocc500_znver5_A1.2/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

## General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

## Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
P-State set to Enabled
NUMA Nodes per Socket set to NPS4
L1 Stride Prefetcher set to Disabled
ACPI SRAT L3 Cache as NUMA Domain set to Enabled

 Sysinfo program /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Sun Mar  2 00:42:26 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Services, from systemctl list-unit-files
```

**(Continued on next page)**

## Platform Notes (Continued)

```
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   00:42:26 up 4 min,  1 user,  load average: 0.18, 0.15, 0.08
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 3093722
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 3093722
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root [priv]
 sshd: root@notty
 /bin/bash ./02.remote_local_SPECcpu_1.01.sh
 /bin/bash ./Run026-compliant-amd-ratefp.sh
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fprate
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.273/templogs/preenv.fprate.273.0.log --lognum 273.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
```

**(Continued on next page)**

## Platform Notes (Continued)

```
$SPEC = /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9535 64-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb00211a
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 64
    siblings        : 128
    2 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids
    0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59,64-67,72-75,80-83,88-91,96-99,104-107,112-115,120-123
    physical id 1: core ids
    0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59,64-67,72-75,80-83,88-91,96-99,104-107,112-115,120-123
    physical id 0: apicids
    0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183,192-199,208-215,224-231,
    240-247
    physical id 1: apicids
    256-263,272-279,288-295,304-311,320-327,336-343,352-359,368-375,384-391,400-407,416-423,432-439,448-455,4
    64-471,480-487,496-503
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               256
  On-line CPU(s) list:                  0-255
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
  Model name:                           AMD EPYC 9535 64-Core Processor
  BIOS Model name:                      AMD EPYC 9535 64-Core Processor                 Unknown CPU @ 2.4GHz
  BIOS CPU family:                      107
  CPU family:                           26
  Model:                                2
  Thread(s) per core:                   2
  Core(s) per socket:                   64
  Socket(s):                            2
  Stepping:                             1
  Frequency boost:                      enabled
  CPU(s) scaling MHz:                   102%
  CPU max MHz:                          2400.0000
  CPU min MHz:                          1500.0000
  BogoMIPS:                             4792.77
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
```

**(Continued on next page)**

## Platform Notes (Continued)

```
                                cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                flush_l1d debug_swap
  Virtualization:               AMD-V
  L1d cache:                    6 MiB (128 instances)
  L1i cache:                    4 MiB (128 instances)
  L2 cache:                     128 MiB (128 instances)
  L3 cache:                     512 MiB (32 instances)
  NUMA node(s):                 32
  NUMA node0 CPU(s):            0-3,128-131
  NUMA node1 CPU(s):            4-7,132-135
  NUMA node2 CPU(s):            8-11,136-139
  NUMA node3 CPU(s):            12-15,140-143
  NUMA node4 CPU(s):            16-19,144-147
  NUMA node5 CPU(s):            20-23,148-151
  NUMA node6 CPU(s):            24-27,152-155
  NUMA node7 CPU(s):            28-31,156-159
  NUMA node8 CPU(s):            32-35,160-163
  NUMA node9 CPU(s):            36-39,164-167
  NUMA node10 CPU(s):           40-43,168-171
  NUMA node11 CPU(s):           44-47,172-175
  NUMA node12 CPU(s):           48-51,176-179
  NUMA node13 CPU(s):           52-55,180-183
  NUMA node14 CPU(s):           56-59,184-187
  NUMA node15 CPU(s):           60-63,188-191
  NUMA node16 CPU(s):           64-67,192-195
  NUMA node17 CPU(s):           68-71,196-199
  NUMA node18 CPU(s):           72-75,200-203
  NUMA node19 CPU(s):           76-79,204-207
  NUMA node20 CPU(s):           80-83,208-211
  NUMA node21 CPU(s):           84-87,212-215
  NUMA node22 CPU(s):           88-91,216-219
  NUMA node23 CPU(s):           92-95,220-223
  NUMA node24 CPU(s):           96-99,224-227
  NUMA node25 CPU(s):           100-103,228-231
  NUMA node26 CPU(s):           104-107,232-235
  NUMA node27 CPU(s):           108-111,236-239
  NUMA node28 CPU(s):           112-115,240-243
  NUMA node29 CPU(s):           116-119,244-247
  NUMA node30 CPU(s):           120-123,248-251
  NUMA node31 CPU(s):           124-127,252-255
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
```

**(Continued on next page)**

## Platform Notes (Continued)

```
  Vulnerability Retbleed:                 Not affected
  Vulnerability Spec rstack overflow:     Not affected
  Vulnerability Spec store bypass:        Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:               Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:               Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                          always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                    Not affected
  Vulnerability Tsx async abort:          Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1    64        1             64
     L1i       32K       4M    8 Instruction     1    64        1             64
     L2         1M     128M   16 Unified         2  1024        1             64
     L3        16M     512M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 32 nodes (0-31)
  node 0 cpus: 0-3,128-131
  node 0 size: 23765 MB
  node 0 free: 23520 MB
  node 1 cpus: 4-7,132-135
  node 1 size: 24189 MB
  node 1 free: 23995 MB
  node 2 cpus: 8-11,136-139
  node 2 size: 24189 MB
  node 2 free: 23972 MB
  node 3 cpus: 12-15,140-143
  node 3 size: 24189 MB
  node 3 free: 24007 MB
  node 4 cpus: 16-19,144-147
  node 4 size: 24189 MB
  node 4 free: 24023 MB
  node 5 cpus: 20-23,148-151
  node 5 size: 24189 MB
  node 5 free: 24041 MB
  node 6 cpus: 24-27,152-155
  node 6 size: 24189 MB
  node 6 free: 23999 MB
  node 7 cpus: 28-31,156-159
  node 7 size: 24189 MB
  node 7 free: 23980 MB
  node 8 cpus: 32-35,160-163
  node 8 size: 24189 MB
  node 8 free: 23992 MB
  node 9 cpus: 36-39,164-167
  node 9 size: 24189 MB
  node 9 free: 24007 MB
  node 10 cpus: 40-43,168-171
  node 10 size: 24189 MB
  node 10 free: 23993 MB
  node 11 cpus: 44-47,172-175
  node 11 size: 24189 MB
  node 11 free: 24018 MB
  node 12 cpus: 48-51,176-179
  node 12 size: 24189 MB
  node 12 free: 24025 MB
  node 13 cpus: 52-55,180-183
```

**(Continued on next page)**

## Platform Notes (Continued)

```
node 13 size: 24189 MB
node 13 free: 24020 MB
node 14 cpus: 56-59,184-187
node 14 size: 24189 MB
node 14 free: 24032 MB
node 15 cpus: 60-63,188-191
node 15 size: 24189 MB
node 15 free: 24029 MB
node 16 cpus: 64-67,192-195
node 16 size: 24189 MB
node 16 free: 24047 MB
node 17 cpus: 68-71,196-199
node 17 size: 24189 MB
node 17 free: 24047 MB
node 18 cpus: 72-75,200-203
node 18 size: 24189 MB
node 18 free: 24015 MB
node 19 cpus: 76-79,204-207
node 19 size: 24189 MB
node 19 free: 24054 MB
node 20 cpus: 80-83,208-211
node 20 size: 24189 MB
node 20 free: 24021 MB
node 21 cpus: 84-87,212-215
node 21 size: 24189 MB
node 21 free: 24008 MB
node 22 cpus: 88-91,216-219
node 22 size: 24189 MB
node 22 free: 24025 MB
node 23 cpus: 92-95,220-223
node 23 size: 24189 MB
node 23 free: 24030 MB
node 24 cpus: 96-99,224-227
node 24 size: 24189 MB
node 24 free: 24007 MB
node 25 cpus: 100-103,228-231
node 25 size: 24151 MB
node 25 free: 23973 MB
node 26 cpus: 104-107,232-235
node 26 size: 24189 MB
node 26 free: 24010 MB
node 27 cpus: 108-111,236-239
node 27 size: 24189 MB
node 27 free: 24011 MB
node 28 cpus: 112-115,240-243
node 28 size: 24189 MB
node 28 free: 23991 MB
node 29 cpus: 116-119,244-247
node 29 size: 24189 MB
node 29 free: 23982 MB
node 30 cpus: 120-123,248-251
node 30 size: 24189 MB
node 30 free: 24017 MB
node 31 cpus: 124-127,252-255
node 31 size: 24037 MB
node 31 free: 23871 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
25  26  27  28  29  30  31
  0:  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32  32
```

(Continued on next page)

## Platform Notes (Continued)

```
 32  32  32  32  32  32  32
 1:  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 2:  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 3:  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 4:  12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 5:  12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 6:  12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 7:  12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 8:  12  12  12  12  12  12  12  12  10  11  11  11  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
 9:  12  12  12  12  12  12  12  12  11  10  11  11  12  12  12  12  32  32  32  32  32  32  32  32
 32  32  32  32  32  32  32
10:  12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
11:  12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
12:  12  12  12  12  12  12  12  12  12  12  12  12  10  11  11  11  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
13:  12  12  12  12  12  12  12  12  12  12  12  12  11  10  11  11  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
14:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  10  11  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
15:  12  12  12  12  12  12  12  12  12  12  12  12  11  11  11  10  32  32  32  32  32  32  32  32
32  32  32  32  32  32  32
16:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11  12  12  12  12  12
12  12  12  12  12  12  12
17:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11  12  12  12  12  12
12  12  12  12  12  12  12
18:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11  12  12  12  12  12
12  12  12  12  12  12  12
19:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10  12  12  12  12  12
12  12  12  12  12  12  12
20:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  10  11  11  11  12
12  12  12  12  12  12  12
21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  10  11  11  12
12  12  12  12  12  12  12
22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  11  10  11  12
12  12  12  12  12  12  12
23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  11  11  11  10  12
12  12  12  12  12  12  12
24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  10
11  11  11  12  12  12  12
25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
10  11  11  12  12  12  12
26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
11  10  11  12  12  12  12
27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  11
11  11  10  12  12  12  12
28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
12  12  12  10  11  11  11
29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
12  12  12  11  10  11  11
30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
```

(Continued on next page)

## Platform Notes (Continued)

```
    12  12  12  11  11  10  11
    31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12  12  12  12  12  12
    12  12  12  11  11  11  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792020000 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 2 00:38

------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                   kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix
                   purge-kernels rollback rsyslog sapconf smartd sshd sysctl-logger systemd-pstore wicked
                   wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
                   kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                   serial-getty@ smartd_generate_opts snmpd snmptrapd sysstat systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd
  generated        ntp_sync
  indirect         systemd-userdbd uuidd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=240b751b-cc96-4bc0-bc79-208919660c0a
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 106:
    current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
```

(Continued on next page)

## Platform Notes (Continued)

```
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc500_znver5_A1.2
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 xfs   1.8T   93G  1.7T   6% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:          Lenovo
    Product:         ThinkSystem SR675 V3 System Board
    Product Family: ThinkSystem
    Serial:          None

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    12x SK Hynix HMCG88AHBRA471N 32 GB 2 rank 6400, configured at 6000
    2x SK Hynix HMCG88AHBRA472N 32 GB 2 rank 6400, configured at 6000
```

**(Continued on next page)**

## Platform Notes (Continued)

```
     10x SK Hynix HMCG88AHBRA478N 32 GB 2 rank 6400, configured at 6000


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Lenovo
    BIOS Version:      QGE133I-7.20
    BIOS Date:         02/05/2025
    BIOS Revision:     7.20
    Firmware Revision: 9.10
```

## Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

**(Continued on next page)**

## Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

## Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

## Base Portability Flags

503.bwaves_r: `-DSPEC_LP64`

**(Continued on next page)**

## Base Portability Flags (Continued)

507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Benchmarks using both C and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
-ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

## Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

**(Continued on next page)**

## Base Other Flags (Continued)

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

## Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

## Peak Portability Flags

`Same as Base Portability Flags`

# Peak Optimization Flags

C benchmarks:

519.lbm_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

538.imagick_r: `basepeak = yes`

544.nab_r: `-m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

C++ benchmarks:

508.namd_r: `-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

510.parest_r: `-m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc -ldl`

Fortran benchmarks:

503.bwaves_r: `basepeak = yes`

549.fotonik3d_r: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto`

**(Continued on next page)**

# Peak Optimization Flags (Continued)

549.fotonik3d_r (continued):
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang

Benchmarks using both Fortran and C:

521.wrf_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl

526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto

**(Continued on next page)**

## Peak Optimization Flags (Continued)

526.blender_r (continued):
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-faggressive-loop-transform -fvector-transform -fscalar-transform
-Mrecursive -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

## Peak Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-unused-command-line-argument

Benchmarks using both C and C++:
-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.html
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Turin-E.xml
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml


SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.


Tested with SPEC CPU®2017 v1.1.9 on 2025-03-01 11:42:25-0500.
Report generated on 2025-03-26 10:36:40 by CPU2017 PS formatter v6716.
Originally published on 2025-03-25.