



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R470 (Intel Xeon 6730P)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Aug-2024

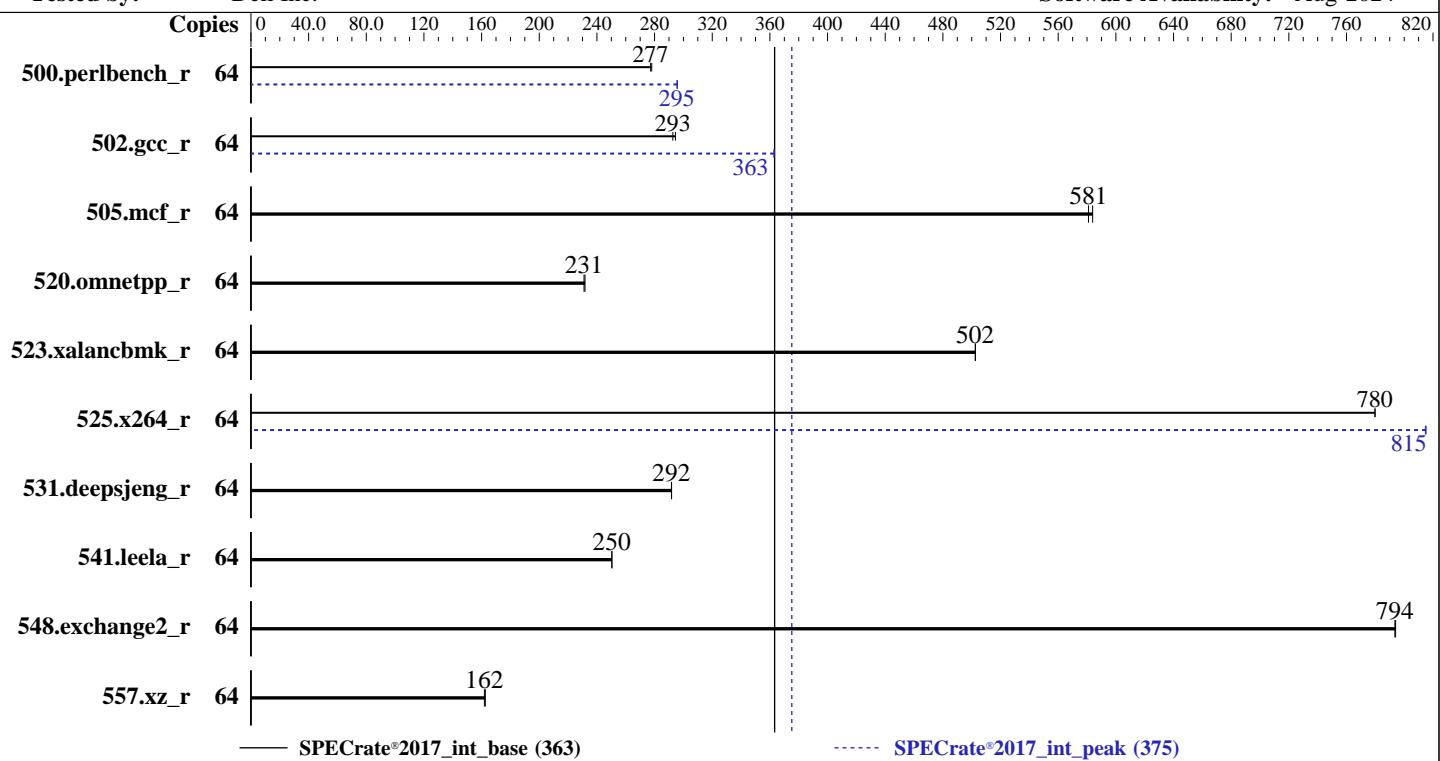

Hardware

CPU Name: Intel Xeon 6730P
 Max MHz: 3800
 Nominal: 2500
 Enabled: 32 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 64 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 288 MB I+D on chip per chip
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx8 PC5-6400B-R)
 Storage: 60 GB on tmpfs
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.23.17-default
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 1.2.6 released Feb-2025
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	367	277	366	278			64	345	295	344	296		
502.gcc_r	64	308	294	310	293			64	250	363	250	363		
505.mcf_r	64	178	581	177	584			64	178	581	177	584		
520.omnetpp_r	64	363	231	362	232			64	363	231	362	232		
523.xalancbmk_r	64	134	503	135	502			64	134	503	135	502		
525.x264_r	64	144	780	144	780			64	137	815	138	815		
531.deepsjeng_r	64	251	292	251	292			64	251	292	251	292		
541.leela_r	64	423	250	423	250			64	423	250	423	250		
548.exchange2_r	64	211	794	211	794			64	211	794	211	794		
557.xz_r	64	425	163	427	162			64	425	163	427	162		

SPECrate®2017_int_base = 363

SPECrate®2017_int_peak = 375

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2024.1/lib/ia32:/mnt/ram
  disk/cpu2017-1.1.9-ic2024.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 60 GB ramdisk created with the cmd: "mount -t tmpfs -o size=60G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

```
DCU Streamer Prefetcher : Disabled
    Sub NUMA Cluster : Enabled
    Dead Line LLC Alloc : Disabled
        Optimizer Mode : Enabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
        C1E : Disabled
        C-States : Autonomous
    Latency Optimized Mode : Enabled
    Energy Efficient Policy : Performance
    CPU Interconnect Bus -
        Link Power Management : Disabled
    PCI ASPM L1 Link Power Management : Disabled
        DIMM Self Healing -
            on Uncorrectable Memory Error : Disabled
```

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2024.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on 1234567-R470 Thu Mar 6 06:04:29 2025
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECCrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

Platform Notes (Continued)

21. dmidecode
22. BIOS

1. uname -a
Linux 1234567-R470 6.4.0-150600.23.17-default #1 SMP PREEMPT_DYNAMIC Tue Jul 30 06:37:32 UTC 2024 (9c450d7)
x86_64 x86_64 x86_64 GNU/Linux

2. w
06:04:29 up 22 min, 1 user, load average: 0.13, 0.03, 0.01
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttys1 - 06:01 21.00s 0.83s 0.00s /bin/bash
/home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format html,pdf,txt

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 1030194
max locked memory (kbytes, -l) 8192
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 1030194
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42 no5lvl
login -- root
-bash
/bin/bash /home/DellFiles/bin/DELL_rate.sh
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format html,pdf,txt
/bin/bash /home/DellFiles/bin/Intel/dell-run-speccpu.sh rate --define DL-VERS=6.1a --output_format html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
DL-VERS=6.1a --output_format html,pdf,txt intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=64 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=32 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
--define DL-VERS=6.1a --output_format html,pdf,txt --nopower --runmode rate --tune base:peak --size
refrate intrate --nopreenv --note-preenv --logfile \$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

Platform Notes (Continued)

```
--lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2024.1
```

```
-----  
6. /proc/cpuinfo  
    model name      : Intel(R) Xeon(R) 6730P  
    vendor_id       : GenuineIntel  
    cpu family     : 6  
    model          : 173  
    stepping       : 1  
    microcode      : 0x1000380  
    bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi  
    cpu cores      : 32  
    siblings       : 64  
    1 physical ids (chips)  
    64 processors (hardware threads)  
    physical id 0: core ids 0-15,64-79  
    physical id 0: apicids 0-31,128-159
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.39.3:  
Architecture:                           x86_64  
CPU op-mode(s):                         32-bit, 64-bit  
Address sizes:                          52 bits physical, 57 bits virtual  
Byte Order:                            Little Endian  
CPU(s):                                 64  
On-line CPU(s) list:                   0-63  
Vendor ID:                             GenuineIntel  
BIOS Vendor ID:                        Intel  
Model name:                            Intel(R) Xeon(R) 6730P  
BIOS Model name:                       Intel(R) Xeon(R) 6730P CPU @ 2.5GHz  
BIOS CPU family:                      179  
CPU family:                            6  
Model:                                 173  
Thread(s) per core:                   2  
Core(s) per socket:                   32  
Socket(s):                            1  
Stepping:                             1  
BogoMIPS:                            5000.00  
Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat  
pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx  
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good  
nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pnpi  
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16  
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt  
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm  
3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 intel_ppin cdp_12  
ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept  
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid  
rtm cqmq rdt_a avx512dq rdseed adx smap avx512ifma clflushopt  
clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec  
xgetbv1 xsaves cqmq_llc cqmq_occur_llc cqmq_mbm_total cqmq_mbm_local  
split_lock_detect user_shstck avx_vnni avx512_bf16 wbnoinvd dtherm ida  
arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmii  
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

Platform Notes (Continued)

rdpid bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear
serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile
amx_int8 flush_lld arch_capabilities

Virtualization:

VT-x

L1d cache:

1.5 MiB (32 instances)

L1i cache:

2 MiB (32 instances)

L2 cache:

64 MiB (32 instances)

L3 cache:

288 MiB (1 instance)

NUMA node(s):

2

NUMA node0 CPU(s):

0-15,32-47

NUMA node1 CPU(s):

16-31,48-63

Vulnerability Gather data sampling:

Not affected

Vulnerability Itlb multihit:

Not affected

Vulnerability Llft:

Not affected

Vulnerability Mds:

Not affected

Vulnerability Meltdown:

Not affected

Vulnerability Mmio stale data:

Not affected

Vulnerability Reg file data sampling:

Not affected

Vulnerability Retbleed:

Not affected

Vulnerability Spec rstack overflow:

Not affected

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and __user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;

PBRSB-eIBRS Not affected; BHI BHI_DIS_S

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.5M	12	Data	1	64	1	64
L1i	64K	2M	16	Instruction	1	64	1	64
L2	2M	64M	16	Unified	2	2048	1	64
L3	288M	288M	16	Unified	3	294912	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-15,32-47

node 0 size: 128620 MB

node 0 free: 117301 MB

node 1 cpus: 16-31,48-63

node 1 size: 128957 MB

node 1 free: 127614 MB

node distances:

node 0 1

0: 10 12

1: 12 10

9. /proc/meminfo

MemTotal: 263760536 kB

10. who -r

run-level 3 Mar 6 05:42

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

Platform Notes (Continued)

multi-user running

```
-----  
12. Services, from systemctl list-unit-files  
STATE          UNIT FILES  
enabled        ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online  
                YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron  
                display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd  
                nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd  
                sshd systemd-pstore wpa_supplicant  
enabled-runtime systemd-remount-fs  
disabled       accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl  
ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq  
ebtables exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata  
ipmi ipmievrd issue-add-ssh-keys kexec-load ksm kvm_stat lummask man-db-create multipathd  
munge nfs nfs-blkmap nmb ntp-wait ntpd ostree-remount rpcbind rpmconfigcheck rsyncd  
rtkit-daemon salt-minion serial-getty@ slurmd smartd_generate_opts smb snmpd snmptrapd  
speech-dispatcherd svnserve systemd-boot-check-no-failures systemd-confext  
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2  
update-system-flatpaks upower vncserver@ wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6  
wickedd-nanny wpa_supplicant@ ypbinder  
indirect       systemd-userdbd wickedd
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.23.17-default  
root=UUID=cfa17314-4c33-4b35-b944-04fa16aacc38  
splash=silent  
resume=/dev/disk/by-uuid/f330f1b3-4862-4daa-add9-e96ad63fa6aa  
mitigations=auto  
quiet  
security=apparmor  
mitigations=auto  
intel_iommu=on,sm_on  
noS1vl
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 24:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes
```

```
-----  
15. sysctl  
kernel.numa_balancing      1  
kernel.randomize_va_space   2  
vm.compaction_proactiveness 20  
vm.dirty_background_bytes   0  
vm.dirty_background_ratio   10  
vm.dirty_bytes              0  
vm.dirty_expire_centisecs  3000  
vm.dirty_ratio              20  
vm.dirty_writeback_centisecs 500  
vm.dirtytime_expire_seconds 43200  
vm.extfrag_threshold        500  
vm.min_unmapped_ratio       1  
vm.nr_hugepages              0  
vm.nr_hugepages_mempolicy    0
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECCrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

Platform Notes (Continued)

```
vm.nr_overcommit_hugepages      0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----  
16. /sys/kernel/mm/transparent_hugepage  
    defrag          always defer defer+madvise [madvise] never  
    enabled         [always] madvise never  
    hpage_pmd_size 2097152  
    shmem_enabled   always within_size advise [never] deny force
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage/khugepaged  
    alloc_sleep_millisecs 60000  
    defrag                1  
    max_ptes_none        511  
    max_ptes_shared       256  
    max_ptes_swap         64  
    pages_to_scan        4096  
    scan_sleep_millisecs 10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP6
```

```
-----  
19. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2024.1  
Filesystem      Type  Size  Used Avail Use% Mounted on  
tmpfs          tmpfs  60G   5.0G  56G   9%  /mnt/ramdisk
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor:        Dell Inc.  
Product:       PowerEdge R470  
Product Family: PowerEdge  
Serial:        1234567
```

```
-----  
21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
 8x 00AD042300AD HMCG88AHBRA471N 32 GB 2 rank 6400
```

```
-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:      Dell Inc.  
BIOS Version:     1.2.6  
BIOS Date:        02/26/2025  
BIOS Revision:    1.2
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C | 502.gcc_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.1/lib -lgkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate®2017_int_base = 363

PowerEdge R470 (Intel Xeon 6730P)

SPECCrate®2017_int_peak = 375

CPU2017 License: 6573

Test Date: Mar-2025

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2025

Tested by: Dell Inc.

Software Availability: Aug-2024

Peak Optimization Flags (Continued)

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.13.xml>

SPEC CPU and SPECCrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-05 17:04:29-0500.

Report generated on 2025-03-28 09:24:08 by CPU2017 PDF formatter v6716.

Originally published on 2025-03-27.