SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor

(Test Sponsor: Meganet)

Invento i6000 EPYC (AMD EPYC 9124)
AMD EPYC 9124

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = 139

CPU2017 License: 6621
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

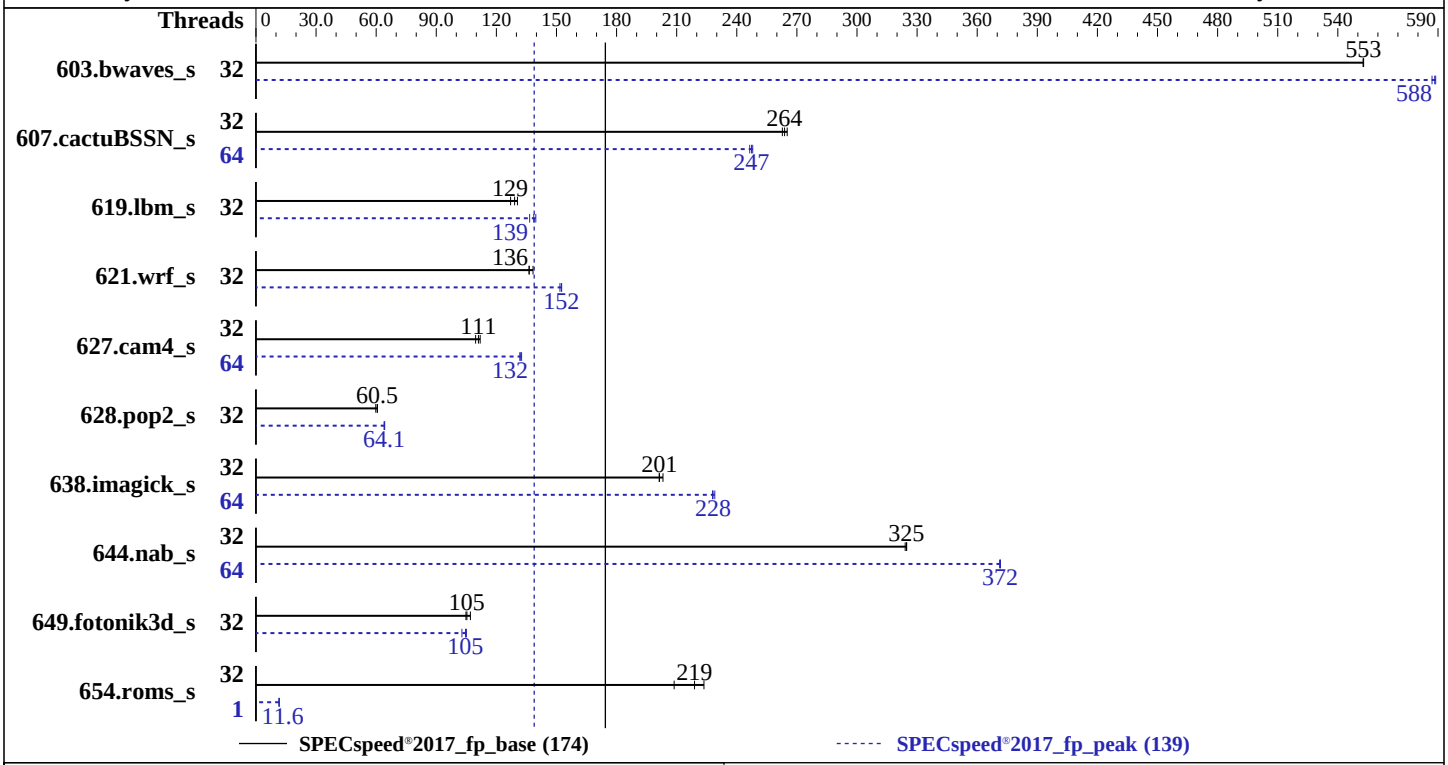

Hardware

CPU Name:	AMD EPYC 9124
Max MHz:	3700
Nominal:	3000
Enabled:	32 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	64 MB I+D on chip per chip, 16 MB shared / 4 cores
Other:	None
Memory:	960 GB (15 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	960 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 22.04.5 LTS kernel version 6.8.0-52-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 5.27 released Nov-2024
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	OS set to prefer performance at the expense of additional power usage

Copyright 2017-2025 Standard Performance Evaluation Corporation

FusionStor
(Test Sponsor: Meganet)
Invento i6000 EPYC (AMD EPYC 9124)
AMD EPYC 9124

SPECspeed®2017_fp_base = 174

SPECspeed®2017_fp_peak = 139

CPU2017 License: 6621
Test Sponsor: Meganet
Tested by: FusionStor

Test Date: Mar-2025
Hardware Availability: Oct-2024
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	107	553	**107**	**553**	107	553	32	**100**	**588**	101	587	100	589
607.cactuBSSN_s	32	**63.2**	**264**	62.9	265	63.4	263	64	67.2	248	67.6	246	**67.4**	**247**
619.lbm_s	32	40.1	131	**40.6**	**129**	41.2	127	32	37.5	140	**37.8**	**139**	38.3	137
621.wrf_s	32	**97.0**	**136**	95.6	138	97.0	136	32	**86.8**	**152**	86.7	153	87.2	152
627.cam4_s	32	79.2	112	80.8	110	**79.8**	**111**	64	67.3	132	**67.1**	**132**	66.8	133
628.pop2_s	32	199	59.8	196	60.6	**196**	**60.5**	32	185	64.0	185	64.3	**185**	**64.1**
638.imagick_s	32	71.0	203	71.7	201	**71.6**	**201**	64	63.0	229	63.3	228	**63.2**	**228**
644.nab_s	32	**53.8**	**325**	53.8	325	53.9	324	64	47.0	372	**47.0**	**372**	47.1	371
649.fotonik3d_s	32	**86.6**	**105**	87.0	105	85.2	107	32	88.7	103	**87.2**	**105**	86.8	105
654.roms_s	32	75.4	209	**71.9**	**219**	70.4	224	1	**1362**	**11.6**	1361	11.6	1363	11.6

SPECspeed®2017_fp_base = 174
SPECspeed®2017_fp_peak = 139

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
     "/home/speccpu/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/speccpu/cpu2017/amd_speed_aocc500_znve
     r5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-31"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-31"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04
```

Platform Notes

```
 Sysinfo program /home/speccpu/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on AMD Wed Mar 19 13:57:01 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
```

(Continued on next page)

Platform Notes (Continued)

```
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux AMD 6.8.0-52-generic #53~22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Wed Jan 15 19:18:46 UTC 2 x86_64 x86_64
  x86_64 GNU/Linux

------------------------------------------------------------
2. w
   13:57:01 up 19:51,  3 users,  load average: 6.87, 7.02, 4.33
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  test     :1       :1               Tue17   ?xdm?   5:15m  0.00s /usr/libexec/gdm-x-session --run-script env
  GNOME_SHELL_SESSION_MODE=ubuntu /usr/bin/gnome-session --session=ubuntu
  test     pts/1    -                Tue18    3:36m  2.21s  0.32s sudo -s
  test     pts/3    -                Tue19   18:40m  0.01s  0.07s sudo -s

------------------------------------------------------------
3. Username
  From environment variable $USER:  root
  From the command 'logname':       test

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              3868763
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init splash
 /lib/systemd/systemd --user
```

(Continued on next page)

Platform Notes (Continued)

```
 /usr/libexec/gnome-terminal-server
 bash
 sudo -s
 sudo -s
 /bin/bash
 python3 ./run_amd_speed_aocc500_znver5_A1.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 fpspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9124 16-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 17
    stepping        : 1
    microcode       : 0xa101148
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 3584 4K pages
    cpu cores       : 16
    siblings        : 32
    2 physical ids (chips)
    64 processors (hardware threads)
    physical id 0: core ids 0-3,8-11,16-19,24-27
    physical id 1: core ids 0-3,8-11,16-19,24-27
    physical id 0: apicids 0-7,16-23,32-39,48-55
    physical id 1: apicids 64-71,80-87,96-103,112-119
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               64
  On-line CPU(s) list:                  0-63
  Vendor ID:                            AuthenticAMD
  Model name:                           AMD EPYC 9124 16-Core Processor
  CPU family:                           25
  Model:                                17
  Thread(s) per core:                   2
  Core(s) per socket:                   16
  Socket(s):                            2
  Stepping:                             1
  Frequency boost:                      enabled
  CPU max MHz:                          3711.9141
  CPU min MHz:                          1500.0000
  BogoMIPS:                             6000.29
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
```

(Continued on next page)

Platform Notes (Continued)

```
                                    extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                    sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                    cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                    osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                    perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                    ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                                    erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                    clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                    xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                    user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                                    amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
                                    flushbyasid decodeassists pausefilter pfthreshold avic
                                    v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                                    ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                    avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                                    debug_swap
  Virtualization:                   AMD-V
  L1d cache:                        1 MiB (32 instances)
  L1i cache:                        1 MiB (32 instances)
  L2 cache:                         32 MiB (32 instances)
  L3 cache:                         128 MiB (8 instances)
  NUMA node(s):                     2
  NUMA node0 CPU(s):                0-15,32-47
  NUMA node1 CPU(s):                16-31,48-63
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Mitigation; Safe RET
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       1M    8 Data            1    64        1             64
     L1i       32K       1M    8 Instruction     1    64        1             64
     L2         1M      32M    8 Unified         2  2048        1             64
     L3        16M     128M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 2 nodes (0-1)
  node 0 cpus: 0-15,32-47
  node 0 size: 515739 MB
  node 0 free: 513288 MB
  node 1 cpus: 16-31,48-63
  node 1 size: 451529 MB
  node 1 free: 449833 MB
  node distances:
  node   0   1
    0:  10  32
```

(Continued on next page)

Platform Notes (Continued)

```
    1:  32  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       990482888 kB

------------------------------------------------------------
10. who -r
  run-level 5 Mar 18 17:22

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.12)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon anacron anydesk apparmor avahi-daemon bluetooth console-setup cron cups
                   cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
                   irqbalance kerneloops keyboard-setup networkd-dispatcher openvpn power-profiles-daemon
                   rsyslog secureboot-db setvtrgb snapd ssh switcheroo-control systemd-oomd systemd-pstore
                   systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
                   unattended-upgrades wpa_supplicant
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         acpid brltty console-getty debug-shell ipmievd nftables openvpn-client@ openvpn-server@
                   openvpn@ rsync rtkit-daemon serial-getty@ speech-dispatcherd
                   systemd-boot-check-no-failures systemd-network-generator systemd-networkd
                   systemd-networkd-wait-online systemd-sysext systemd-time-wait-sync upower
                   wpa_supplicant-nl80211@ wpa_supplicant-wired@ wpa_supplicant@
  generated        apport openipmi speech-dispatcher
  indirect         saned@ spice-vdagentd uuidd
  masked           alsa-utils cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
                   screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-52-generic
  root=UUID=e953dd87-e49e-4230-a412-5a6320fe39a0
  ro
  quiet
  splash
  vt.handoff=7

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 53:
    current policy: frequency should be within 1.50 GHz and 3.00 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  3000MHz

------------------------------------------------------------
15. sysctl
```

(Continued on next page)

Platform Notes (Continued)

```
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 22.04.5 LTS

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/speccpu/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda2      ext4  879G   37G  798G   5% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         FusionStor
    Product:        Fusionstor_Invento_i6000_EPYC_Series
    Product Family: Server
    Serial:         GNG6PB312A0006

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
```

(Continued on next page)

Platform Notes (Continued)

```
   "DMTF SMBIOS" standard.
   Memory:
     15x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800
     9x Unknown Unknown


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       FUSIONSTOR
    BIOS Version:      F18
    BIOS Date:         10/11/2024
    BIOS Revision:     5.27
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt
-mllvm -loop-unswitch-threshold=200000 -mllvm -unroll-threshold=100
-funroll-loops -mllvm -lsr-in-nested-loop -Mrecursive -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-return-type -Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:
`-Wno-return-type -Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

619.lbm_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining -fstruct-layout=9 -mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

638.imagick_s: `Same as 619.lbm_s`

644.nab_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast`

(Continued on next page)

Peak Optimization Flags (Continued)

644.nab_s (continued):
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mrecip=none
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -fscalar-transform -fvector-transform
-mllvm -reduce-array-computations=3 -Mrecursive
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -mllvm -reduce-array-computations=3
-Mrecursive -zopt -fopenmp=libomp -lomp -lamdlibm
-lamdalloc -lflang

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -funroll-loops
-mllvm -lsr-in-nested-loop -Mrecursive -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining

(Continued on next page)

Peak Optimization Flags (Continued)

627.cam4_s (continued):
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -Mrecursive
-mrecip=none -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fscalar-transform
-fvector-transform -Mrecursive -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -DSPEC_OPENMP
-fremap-arrays -fstrip-mining -fstruct-layout=9
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:
-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:
-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html
http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml
http://www.spec.org/cpu2017/flags/Fusionstor-Platform-Flags-AMD-rev1.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-19 04:27:01-0400.
Report generated on 2025-04-22 12:00:02 by CPU2017 PS formatter v6716.
Originally published on 2025-04-22.