# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

## FusionServer 2288H V8 (Intel Xeon 6980P)

SPECspeed®2017_fp_base = 514

SPECspeed®2017_fp_peak = 514

**CPU2017 License:** 6488
**Test Sponsor:** xFusion
**Tested by:** xFusion

**Test Date:** Mar-2025
**Hardware Availability:** Apr-2025
**Software Availability:** Jun-2024

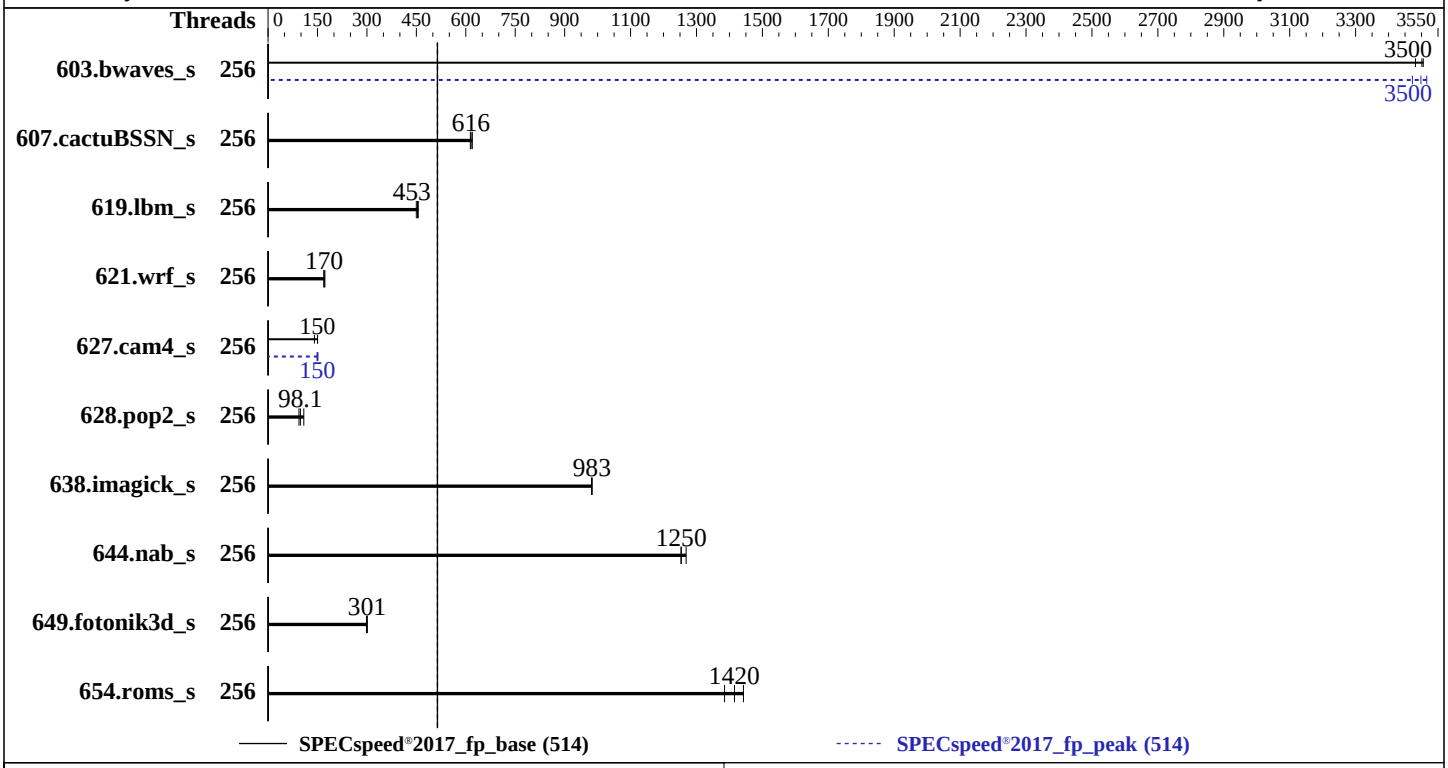


## Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon 6980P |
| Max MHz: | 3900 |
| Nominal: | 2000 |
| Enabled: | 256 cores, 2 chips |
| Orderable: | 2 chips |
| Cache L1: | 64 KB I + 48 KB D on chip per core |
| L2: | 2 MB I+D on chip per core |
| L3: | 504 MB I+D on chip per chip |
| Other: | None |
| Memory: | 768 GB (24 x 32 GB 2Rx8 PC5-88/44B-M) |
| Storage: | 1 x 7.68 TB NVMe SSD |
| Other: | CPU Cooling: Air |

## Software

| | |
|---|---|
| OS: | SUSE Linux Enterprise Server 15 SP6 6.4.0-150600.21-default |
| Compiler: | C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux; |
| Parallel: | Yes |
| Firmware: | Version 01.01.06.05 Released Feb-2025 |
| File System: | btrfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 64-bit |
| Peak Pointers: | 64-bit |
| Other: | jemalloc memory allocator V5.0.1 |
| Power Management: | BIOS and OS set to prefer performance at the cost of additional power usage |

# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## xFusion

## FusionServer 2288H V8 (Intel Xeon 6980P)

SPECspeed®2017_fp_base = 514

SPECspeed®2017_fp_peak = 514

**CPU2017 License:** 6488
**Test Sponsor:** xFusion
**Tested by:** xFusion

**Test Date:** Mar-2025
**Hardware Availability:** Apr-2025
**Software Availability:** Jun-2024

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 256 | **16.9** | **3500** | 16.9 | 3480 | 16.8 | 3510 | 256 | 16.8 | 3520 | 17.0 | 3470 | **16.9** | **3500** |
| 607.cactuBSSN_s | 256 | **27.1** | **616** | 27.2 | 614 | 26.9 | 620 | 256 | **27.1** | **616** | 27.2 | 614 | 26.9 | 620 |
| 619.lbm_s | 256 | 11.5 | 456 | 11.6 | 450 | **11.6** | **453** | 256 | 11.5 | 456 | 11.6 | 450 | **11.6** | **453** |
| 621.wrf_s | 256 | 76.7 | 173 | **77.7** | **170** | 78.2 | 169 | 256 | 76.7 | 173 | **77.7** | **170** | 78.2 | 169 |
| 627.cam4_s | 256 | 59.0 | 150 | **59.0** | **150** | 63.0 | 141 | 256 | **59.0** | **150** | 59.6 | 149 | 58.6 | 151 |
| 628.pop2_s | 256 | **121** | **98.1** | 127 | 93.8 | 109 | 108 | 256 | **121** | **98.1** | 127 | 93.8 | 109 | 108 |
| 638.imagick_s | 256 | **14.7** | **983** | 14.7 | 983 | 14.7 | 982 | 256 | **14.7** | **983** | 14.7 | 983 | 14.7 | 982 |
| 644.nab_s | 256 | **13.9** | **1250** | 13.9 | 1250 | 13.8 | 1270 | 256 | **13.9** | **1250** | 13.9 | 1250 | 13.8 | 1270 |
| 649.fotonik3d_s | 256 | 30.3 | 301 | 30.5 | 299 | **30.3** | **301** | 256 | 30.3 | 301 | 30.5 | 299 | **30.3** | **301** |
| 654.roms_s | 256 | **11.1** | **1420** | 11.4 | 1390 | 10.9 | 1440 | 256 | **11.1** | **1420** | 11.4 | 1390 | 10.9 | 1440 |

**SPECspeed®2017_fp_base = 514**

**SPECspeed®2017_fp_peak = 514**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-255
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/root/speccpu/lib/intel64:/root/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

## Platform Notes

```
BIOS configuration:
Performance Profile Set to Load Balance
Enable LP [Global] Set to Single LP
SNC Set to Enabled

Sysinfo program /root/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Mar 12 13:21:00 2025

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   13:21:00 up 49 min,  1 user,  load average: 68.77, 186.49, 202.66
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty2     -                12:36   43:32   0.91s  0.00s -bash

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
```

**(Continued on next page)**

## Platform Notes (Continued)

```
   pending signals                 (-i) 3092225
   max locked memory       (kbytes, -l) 8192
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 3092225
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize=42
 login -- root
 -bash
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=256 --tune base,peak -o all --define smt-on
   --define drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=256 --tune base,peak --output_format all
   --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed
   --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.006/templogs/preenv.fpspeed.006.0.log --lognum 006.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /root/speccpu

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) 6980P
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 173
    stepping        : 1
    microcode       : 0x1000380
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
    cpu cores       : 128
    siblings        : 128
    2 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids 0-42,64-106,128-169
    physical id 1: core ids 0-41,64-106,128-170
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
    ,74,76,78,80,82,84,128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,17
    0,172,174,176,178,180,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,256,258,260,262,264
    ,266,268,270,272,274,276,278,280,282,284,286,288,290,292,294,296,298,300,302,304,306,308,310,312,314,316,
    318,320,322,324,326,328,330,332,334,336,338
    physical id 1: apicids
    512,514,516,518,520,522,524,526,528,530,532,534,536,538,540,542,544,546,548,550,552,554,556,558,560,562,5
    64,566,568,570,572,574,576,578,580,582,584,586,588,590,592,594,640,642,644,646,648,650,652,654,656,658,66
    0,662,664,666,668,670,672,674,676,678,680,682,684,686,688,690,692,694,696,698,700,702,704,706,708,710,712
    ,714,716,718,720,722,724,768,770,772,774,776,778,780,782,784,786,788,790,792,794,796,798,800,802,804,806,
    808,810,812,814,816,818,820,822,824,826,828,830,832,834,836,838,840,842,844,846,848,850,852
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.
```

(Continued on next page)

## Platform Notes (Continued)

```
------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               256
  On-line CPU(s) list:                  0-255
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel(R) Corporation
  Model name:                           Intel(R) Xeon(R) 6980P
  BIOS Model name:                      Intel(R) Xeon(R) 6980P  CPU @ 2.0GHz
  BIOS CPU family:                      179
  CPU family:                           6
  Model:                                173
  Thread(s) per core:                   1
  Core(s) per socket:                   128
  Socket(s):                            2
  Stepping:                             1
  CPU(s) scaling MHz:                   21%
  CPU max MHz:                          3900.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             4000.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                        pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                                        xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                                        tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                                        3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                                        ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                                        vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                                        rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                        clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                        xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                        split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req vnmi avx512vbmi
                                        umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
                                        avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk
                                        pconfig arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
                                        arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            12 MiB (256 instances)
  L1i cache:                            16 MiB (256 instances)
  L2 cache:                             512 MiB (256 instances)
  L3 cache:                             1008 MiB (2 instances)
  NUMA node(s):                         6
  NUMA node0 CPU(s):                    0-42
  NUMA node1 CPU(s):                    43-85
  NUMA node2 CPU(s):                    86-127
  NUMA node3 CPU(s):                    128-169
  NUMA node4 CPU(s):                    170-212
  NUMA node5 CPU(s):                    213-255
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
```

(Continued on next page)

## Platform Notes (Continued)

```
  Vulnerability L1tf:                  Not affected
  Vulnerability Mds:                   Not affected
  Vulnerability Meltdown:              Not affected
  Vulnerability Mmio stale data:       Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:              Not affected
  Vulnerability Spec rstack overflow:  Not affected
  Vulnerability Spec store bypass:     Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:            Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:            Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                                       PBRSB-eIBRS Not affected; BHI BHI_DIS_S
  Vulnerability Srbds:                 Not affected
  Vulnerability Tsx async abort:       Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K      12M   12 Data            1     64        1             64
     L1i       64K      16M   16 Instruction     1     64        1             64
     L2         2M     512M   16 Unified         2   2048        1             64
     L3       504M    1008M   16 Unified         3 516096        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 6 nodes (0-5)
  node 0 cpus: 0-42
  node 0 size: 128501 MB
  node 0 free: 126272 MB
  node 1 cpus: 43-85
  node 1 size: 129012 MB
  node 1 free: 128071 MB
  node 2 cpus: 86-127
  node 2 size: 129012 MB
  node 2 free: 128245 MB
  node 3 cpus: 128-169
  node 3 size: 129012 MB
  node 3 free: 128234 MB
  node 4 cpus: 170-212
  node 4 size: 129012 MB
  node 4 free: 127142 MB
  node 5 cpus: 213-255
  node 5 size: 128532 MB
  node 5 free: 127863 MB
  node distances:
  node   0   1   2   3   4   5
    0:  10  12  12  21  21  21
    1:  12  10  12  21  21  21
    2:  12  12  10  21  21  21
    3:  21  21  21  10  12  12
    4:  21  21  21  12  10  12
    5:  21  21  21  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       791639488 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 12 12:36 last=5
```

(Continued on next page)

## Platform Notes (Continued)

```
------------------------------------------------------------
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT            LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service    loaded failed failed systemd script to load sep5 driver at boot time
  * udisks2.service loaded failed failed Disk Manager

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron
                   display-manager getty@ issue-generator kbdsettings kdump kdump-early kdump-notify klog
                   lvm2-monitor nscd nvmefc-boot-connections nvmf-autoconnect postfix purge-kernels rollback
                   rsyslog sep5 smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6
                   wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl
                   ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebtables
                   exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged ipmi ipmievd irqbalance
                   issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb
                   ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@
                   smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
                   systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
                   systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@
  indirect         systemd-userdbd wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
  root=UUID=6e3dc6a0-eb5c-4adf-9eb8-8aef9c14cf2c
  nohz_full=1-255
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=365M,high
  crashkernel=72M,low

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 23:
    current policy: frequency should be within 800 MHz and 3.90 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
```

(Continued on next page)

## Platform Notes (Continued)

```
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP6

------------------------------------------------------------
20. Disk information
SPEC is set to: /root/speccpu
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/nvme0n1p3 btrfs  1.5T  332G  1.2T  23% /root

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Product:        2288H V8
    Product Family: Birch Stream

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    24x Micron MTC20F2085S1HC88XD1 WCCCC 32 GB 2 rank 8800


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
```

**(Continued on next page)**

## Platform Notes (Continued)

```
    BIOS Vendor:       INSYDE Corp.
    BIOS Version:      01.01.06.05
    BIOS Date:         02/26/2025
    BIOS Revision:     6.5
```

## Compiler Version Notes

```
==============================================================================================================
C              | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran        | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran, C     | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

# Base Compiler Invocation

C benchmarks:
`icx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

**(Continued on next page)**

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

## Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

## Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using Fortran, C, and C++:
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int

**(Continued on next page)**

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):
`-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

## Peak Compiler Invocation

C benchmarks:
`icx`

Fortran benchmarks:
`ifx`

Benchmarks using both Fortran and C:
`ifx icx`

Benchmarks using Fortran, C, and C++:
`icpx icx ifx`

## Peak Portability Flags

`Same as Base Portability Flags`

## Peak Optimization Flags

C benchmarks:

619.lbm_s: `basepeak = yes`

638.imagick_s: `basepeak = yes`

644.nab_s: `basepeak = yes`

Fortran benchmarks:

603.bwaves_s: `-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

**(Continued on next page)**

## Peak Optimization Flags (Continued)

649.fotonik3d_s: `basepeak = yes`

654.roms_s: `basepeak = yes`

Benchmarks using both Fortran and C:

621.wrf_s: `basepeak = yes`

627.cam4_s: `-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

628.pop2_s: `basepeak = yes`

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html`
`http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.0.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-GNR-V1.0.xml`


SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-12 01:21:00-0400.
Report generated on 2025-04-11 11:13:18 by CPU2017 PS formatter v6716.
Originally published on 2025-04-11.