SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 201

SPECspeed®2017_fp_peak = 202

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2025
Hardware Availability: Dec-2023
Software Availability: Apr-2024

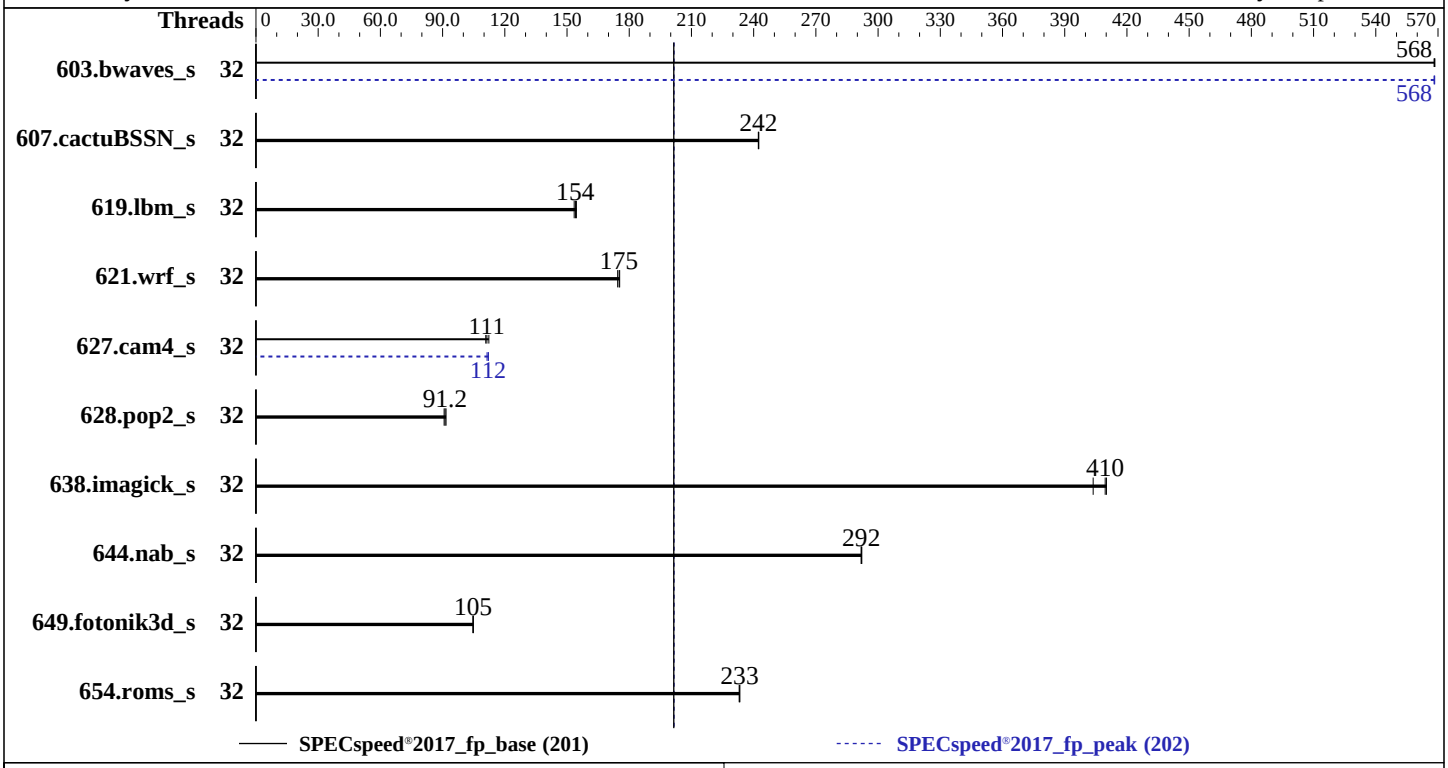

Hardware

CPU Name:	Intel Xeon Gold 6430
Max MHz:	3400
Nominal:	2100
Enabled:	32 cores, 1 chip
Orderable:	1 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	60 MB I+D on chip per chip
Other:	None
Memory:	256 GB (8 x 32 GB 2Rx8 PC5-4800B-R, running at 4400)
Storage:	1 x 960 GB SATA SSD
Other:	CPU Cooling: Air

Software

OS:	Red Hat Enterprise Linux 9.4 (Plow) 5.14.0-427.13.1.el9_4.x86_64
Compiler:	C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Version 01.01.06.08 Released Jan-2025
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2288H V7 (Intel Xeon Gold 6430)

SPECspeed®2017_fp_base = 201

SPECspeed®2017_fp_peak = 202

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2025
Hardware Availability: Dec-2023
Software Availability: Apr-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	**104**	**568**	104	568	104	568	32	104	568	104	568	**104**	**568**
607.cactuBSSN_s	32	68.8	242	**68.8**	**242**	68.8	242	32	68.8	242	**68.8**	**242**	68.8	242
619.lbm_s	32	**34.0**	**154**	33.9	155	34.1	153	32	**34.0**	**154**	33.9	155	34.1	153
621.wrf_s	32	75.8	174	75.4	175	**75.5**	**175**	32	75.8	174	75.4	175	**75.5**	**175**
627.cam4_s	32	80.0	111	78.9	112	**79.6**	**111**	32	79.5	111	**79.1**	**112**	79.1	112
628.pop2_s	32	130	91.7	**130**	**91.2**	131	90.7	32	130	91.7	**130**	**91.2**	131	90.7
638.imagick_s	32	35.2	410	**35.2**	**410**	35.7	404	32	35.2	410	**35.2**	**410**	35.7	404
644.nab_s	32	59.8	292	**59.9**	**292**	59.9	292	32	59.8	292	**59.9**	**292**	59.9	292
649.fotonik3d_s	32	**87.1**	**105**	87.0	105	87.1	105	32	**87.1**	**105**	87.0	105	87.1	105
654.roms_s	32	67.5	233	**67.5**	**233**	67.6	233	32	67.5	233	**67.5**	**233**	67.6	233

SPECspeed®2017_fp_base = 201

SPECspeed®2017_fp_peak = 202

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

(Continued on next page)

General Notes (Continued)

```
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Performance Profile Set to Load Balance
Enable LP [Global] Set to Single LP

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost.localdomain Mon Mar 24 10:00:43 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 252 (252-32.el9_4)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files
 14. Linux kernel boot-time arguments, from /proc/cmdline
 15. cpupower frequency-info
 16. tuned-adm active
 17. sysctl
 18. /sys/kernel/mm/transparent_hugepage
 19. /sys/kernel/mm/transparent_hugepage/khugepaged
 20. OS release
 21. Disk information
 22. /sys/devices/virtual/dmi/id
 23. dmidecode
 24. BIOS
 ------------------------------------------------------------

 ------------------------------------------------------------
 1. uname -a
   Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
   2024 x86_64 x86_64 x86_64 GNU/Linux

 ------------------------------------------------------------
 2. w
    10:00:43 up  6:15,  4 users,  load average: 5.70, 5.67, 3.37
   USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1      06:14    3:42m  1.11s  0.01s -bash
   root     pts/0     08:59   52:51   0.06s  0.06s -bash

 ------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 1027181
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 1027181
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 31
 login -- root
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=32 --tune base,peak -o all --define
   drop_caches fpspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2024.1-lin-sapphirerapids-speed-20240308.cfg --define cores=32 --tune base,peak --output_format all
   --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
   --note-preenv --logfile $SPEC/tmp/CPU2017.039/templogs/preenv.fpspeed.039.0.log --lognum 039.0
   --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Gold 6430
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b000603
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
    cpu cores       : 32
    siblings        : 32
    1 physical ids (chips)
    32 processors (hardware threads)
    physical id 0: core ids 0-31
    physical id 0: apicids
    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        46 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               32
  On-line CPU(s) list:                  0-31
  Vendor ID:                            GenuineIntel
  BIOS Vendor ID:                       Intel(R) Corporation
  Model name:                           Intel(R) Xeon(R) Gold 6430
  BIOS Model name:                      Intel(R) Xeon(R) Gold 6430
  CPU family:                           6
  Model:                                143
  Thread(s) per core:                   1
  Core(s) per socket:                   32
  Socket(s):                            1
  Stepping:                             8
  CPU(s) scaling MHz:                   100%
  CPU max MHz:                          3400.0000
  CPU min MHz:                          800.0000
  BogoMIPS:                             4200.00
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
                                        rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
                                        xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
                                        dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                                        avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
                                        cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                        tpr_shadow flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
                                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm
                                        ida arat pln pts vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                                        gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                                        la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                                        md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                                        amx_tile amx_int8 flush_l1d arch_capabilities
  Virtualization:                       VT-x
  L1d cache:                            1.5 MiB (32 instances)
  L1i cache:                            1 MiB (32 instances)
  L2 cache:                             64 MiB (32 instances)
  L3 cache:                             60 MiB (1 instance)
  NUMA node(s):                         1
  NUMA node0 CPU(s):                    0-31
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
                                        PBRSB-eIBRS SW sequence
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Srbds:                Not affected
  Vulnerability Tsx async abort:      Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     1.5M   12 Data            1    64        1             64
     L1i       32K       1M    8 Instruction     1    64        1             64
     L2         2M      64M   16 Unified         2  2048        1             64
     L3        60M      60M   15 Unified         3 65536        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 1 nodes (0)
  node 0 cpus: 0-31
  node 0 size: 256859 MB
  node 0 free: 248492 MB
  node distances:
  node   0
    0:  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       263024000 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 24 06:14 last=5

------------------------------------------------------------
11. Systemd service manager version: systemd 252 (252-32.el9_4)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT         LOAD   ACTIVE SUB    DESCRIPTION
  * sep5.service loaded failed failed systemd script to load sep5 driver at boot time

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker firewalld
                   gdm getty@ insights-client-boot irqbalance iscsi-onboot iscsi-starter kdump libstoragemgmt
                   low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                   nvmefc-boot-connections ostree-remount power-profiles-daemon qemu-guest-agent rhsmcertd
                   rsyslog rtkit-daemon selinux-autorelabel-mark sep5 smartd sshd sssd switcheroo-control
                   sysstat systemd-boot-update systemd-network-generator tuned udisks2 upower vgauthd
                   vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait chronyd-restricted cni-dhcp console-getty
                   cpupower cups-browsed dbus-daemon debug-shell dnf-system-upgrade dnsmasq iprdump iprinit
                   iprupdate iscsi-init iscsid iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update
                   netavark-dhcp-proxy netavark-firewalld-reload nftables numad nvmf-autoconnect
                   ostree-readonly-sysroot-migration ostree-state-overlay@ pesign podman podman-auto-update
                   podman-clean-transient podman-kube@ podman-restart psacct ras-mc-ctl rasdaemon rdisc rhcd
                   rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@
                   speech-dispatcherd sshd-keygen@ systemd-boot-check-no-failures systemd-pstore
```

(Continued on next page)

Platform Notes (Continued)

```
                  systemd-sysext wpa_supplicant
  indirect        iscsi spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                  systemd-sysupdate systemd-sysupdate-reboot

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  nohz_full=1-31

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 17:
    current policy: frequency should be within 3.40 GHz and 3.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. tuned-adm active
  Current active profile: throughput-performance

------------------------------------------------------------
17. sysctl
  kernel.numa_balancing               0
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     40
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      10
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
19. /sys/kernel/mm/transparent_hugepage/khugepaged
```

(Continued on next page)

Platform Notes (Continued)

```
   alloc_sleep_millisecs   60000
   defrag                      1
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000

 ------------------------------------------------------------
 20. OS release
   From /etc/*-release /etc/*-version
   os-release     Red Hat Enterprise Linux 9.4 (Plow)
   redhat-release Red Hat Enterprise Linux release 9.4 (Plow)
   system-release Red Hat Enterprise Linux release 9.4 (Plow)

 ------------------------------------------------------------
 21. Disk information
 SPEC is set to: /home/cpu2017
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   791G   34G  758G   5% /home

 ------------------------------------------------------------
 22. /sys/devices/virtual/dmi/id
     Vendor:         XFUSION
     Product:        2288H V7
     Product Family: Eagle Stream

 ------------------------------------------------------------
 23. dmidecode
   Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     8x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800, configured at 4400


 ------------------------------------------------------------
 24. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       XFUSION
    BIOS Version:      01.01.06.08
    BIOS Date:         01/03/2025
    BIOS Revision:     6.8
```

Compiler Version Notes

```
==============================================================================================================
C               | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran         | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------

============================================================================================================
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64

(Continued on next page)

Base Portability Flags (Continued)

649.fotonik3d_s: `-DSPEC_LP64`
654.roms_s: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:
```
icx
```

Fortran benchmarks:
```
ifx
```

Benchmarks using both Fortran and C:
```
ifx icx
```

(Continued on next page)

Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

649.fotonik3d_s: basepeak = yes

654.roms_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2_s: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html`
`http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml`
`http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-24 10:00:43-0400.
Report generated on 2025-04-09 15:01:24 by CPU2017 PS formatter v6716.
Originally published on 2025-04-09.